



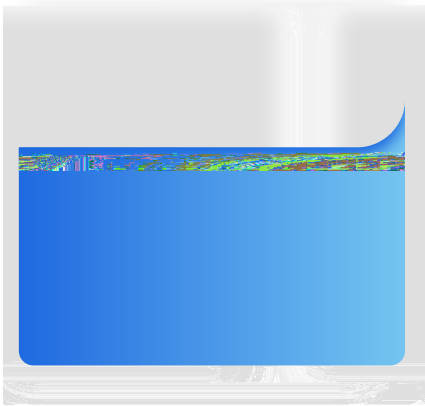



	220Vac		240Vac	
--	--------	--	--------	--

DC	168Vdc		280Vdc	
	47Hz		63Hz	
			0.8A	
(230Vac)			20A	

0.98		230Vac/50Hz
		220-240Vac/50Hz 30-100%
6%	10%	230Vac/50Hz
	20%	220-240Vac/50Hz 30-100%

--	--	--



110W NFC

DALI-2 & D4i

		21.6V	24V	26.4V	“ DA- ”
				30V	“ DA- ”
		0		125mA	“ DA- ”
		0		250mA	“ DA- ” 6ms 250mA 2.2ms 125mA
DALI-2		12V	16V	20V	
DALI-2		50mA		60mA	
	≤ 75	≥ 100,000 hours			80%
MTBF		250,000 hours			230Vac, , 25 (MIL-HDBK-217F)
		IP20			
		90			
		8			75
		620g			
		150mm*90mm*37mm			x x

1.

.DALI-2


25

LED

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


--	--	--	--

EMI/EMS	/	
---------	---	--

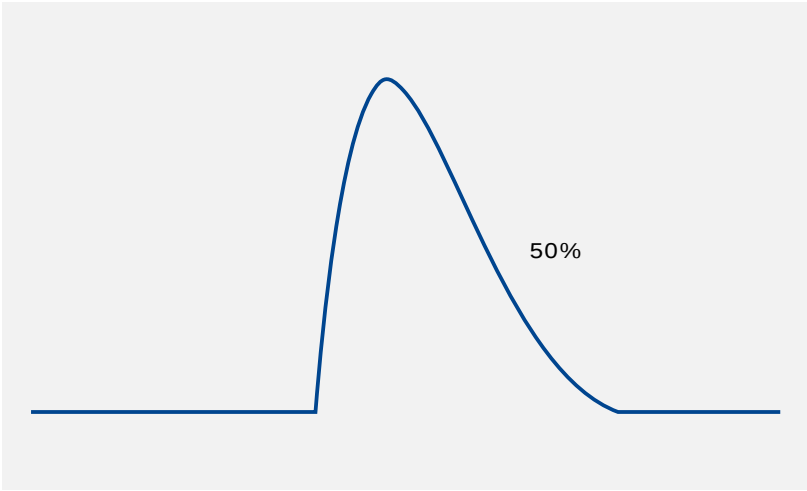


		T(@10%)	T(@50%)
230Vac	20A		1.6mS

Vs.

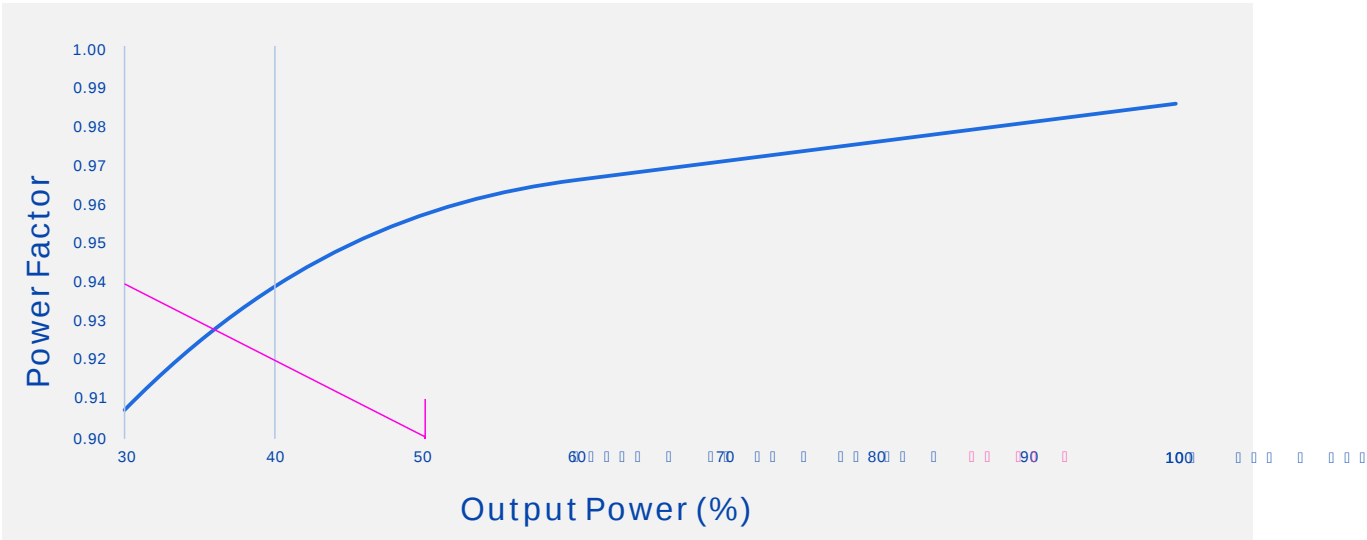

— Vin=230Vac

Vs.

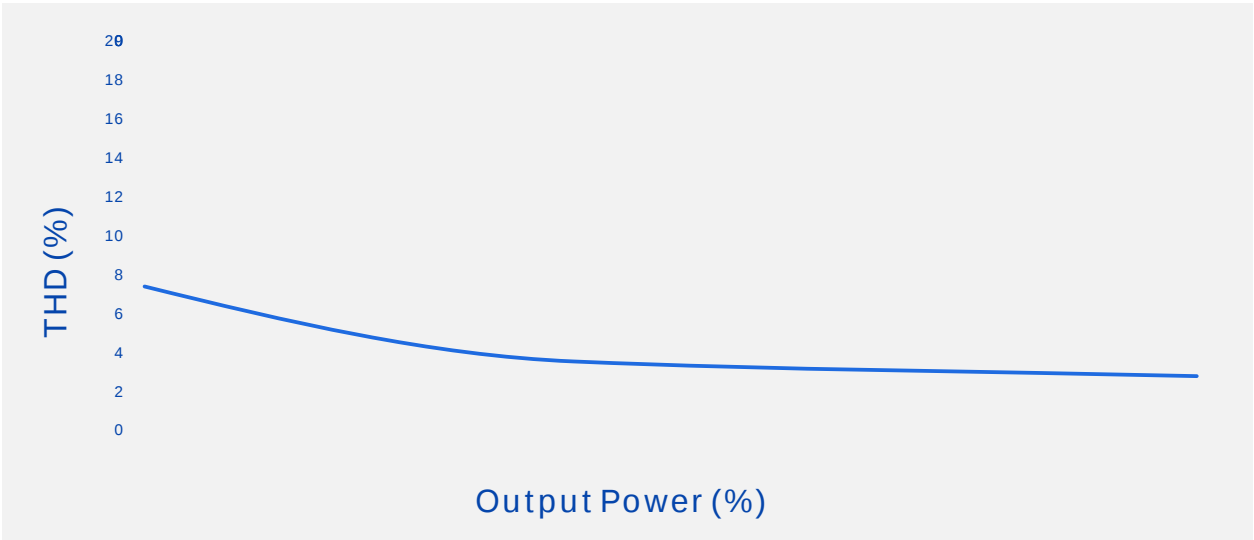

— Vin=230Vac

110W NFC

DALI-2 & D4i


NTC

(NTC)	T1 ()		60		
	T2 ()		70		LED ≥ T2
		10%loset	20%loset	100%loset	20%



1 LED ;





V00		2024/01/12	