

SOSEN LED Driver, Your Smart Choice

SS-200VP

LED



: SS-200VP-XXX

: 200W LED

: V09

: 2025-11-19



--	--	--	--	--

				100V

SS-200VP

LED

(SS-200VP-56*)

	22V		56V	22-36V
	36V		56V	Po=Vo*Io=200W
	3.6A		5.6A	5.6A 36V,3.6A 56V
AOC	0.7A		5.6A	
	2.8A		5.6A	DALI-2
			60V	
&120Vac	88.0%	90.0%		56V/3.6A
&220Vac	90.5%	92.5%		56V/3.6A
&277Vac	91.0%	93.0%		56V/3.6A
	-5%		+5%	
PK-AV		5%	10%	
			10%	


(SS-200VP-190*)

	95V		190V	95-133V
	133V		190V	Po=Vo*Io=200W
	1.05A		1.5A	1.5A 133V,1.05A 190V
D 卜 AOC	0.35A		1.5A	
	0.75A		1.5A	DALI-2
			210V	
&120Vac	88.5%	90.5%		190V/1.05A
91.9% 220Vac ẽ 1 Ě	91.0%	93.0%		190V/1.05A
&277Vac	91.0%	93.0%		190V/1.05A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac A
			0.5S	220Vac

(SS-200VP-286*)

--	--	--	--	--

--



E

88 87 86 85 84 83 82 81 80 79 78 77 76 75 74 73 72 71 70 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1



SS-2000 LED

S.

1/1


SS-2000
Output

Vs.


1/1

SS-5000 5000


SS-200VP LED

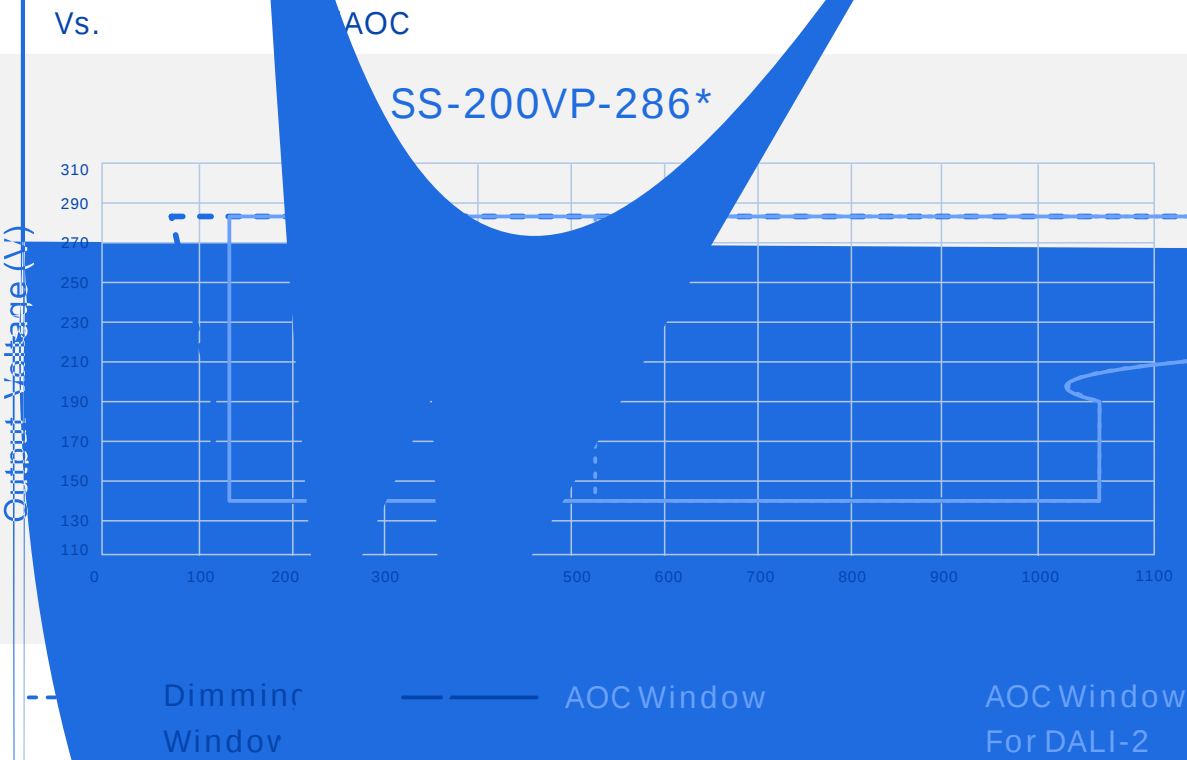

Vs. (Vin=220Vac)

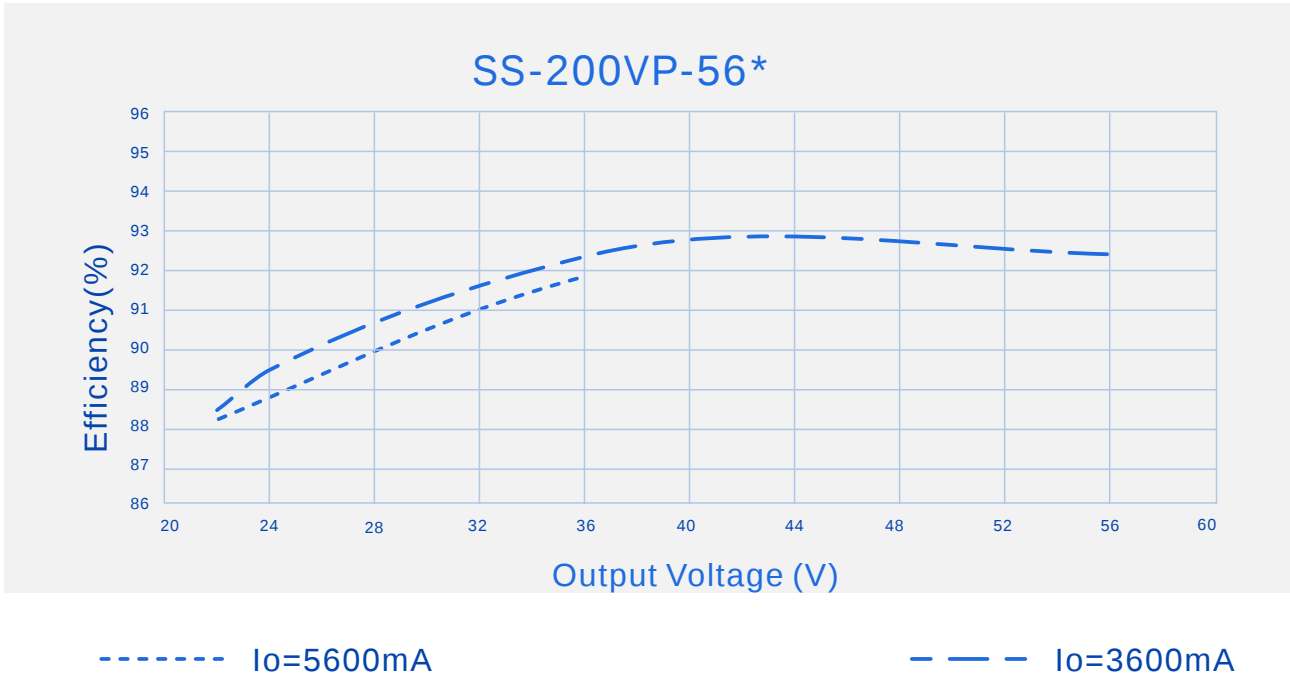


Vs. (Vin=277Vac)

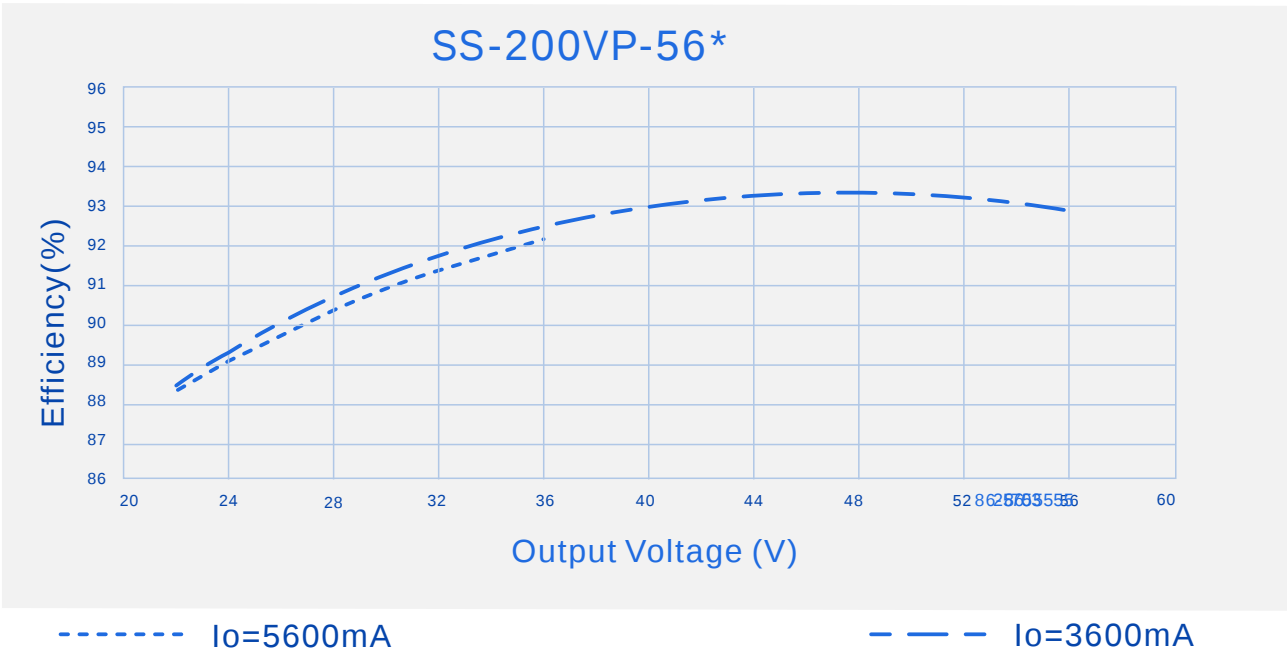


SS-200VP LED



Vs. (Vin=120Vac)

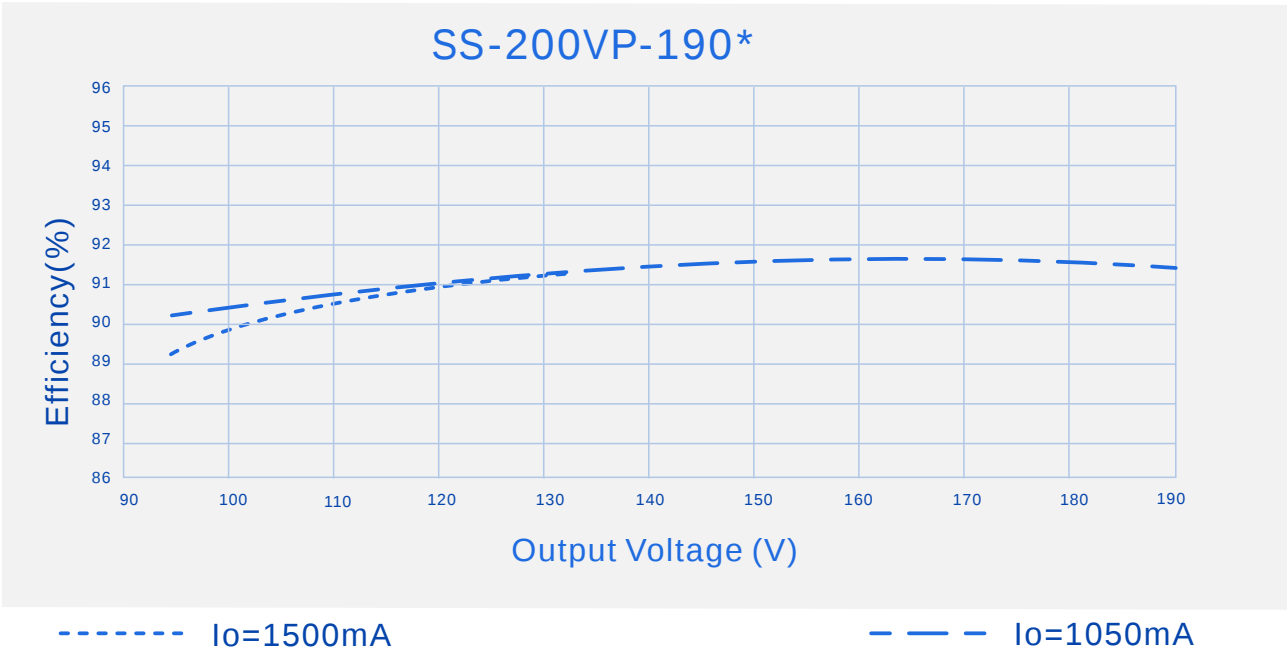

Vs. (Vin=220Vac)

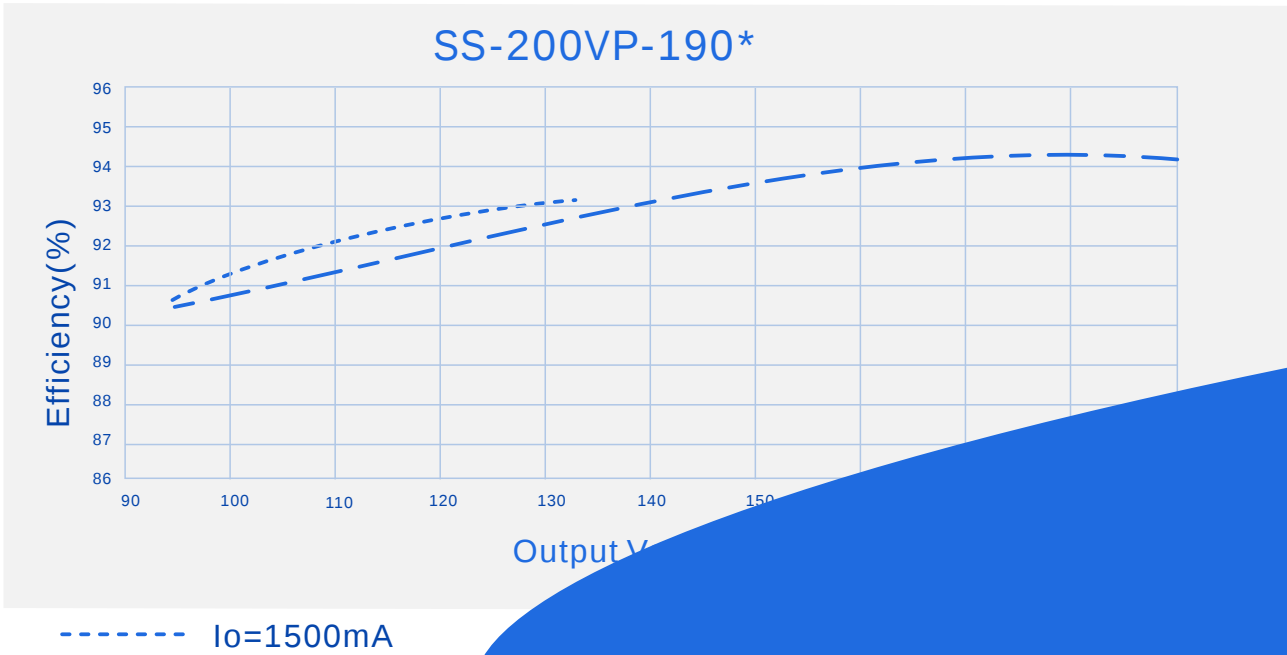


Vs. (Vin=277Vac)

Is# 2012 0 2





Vs.

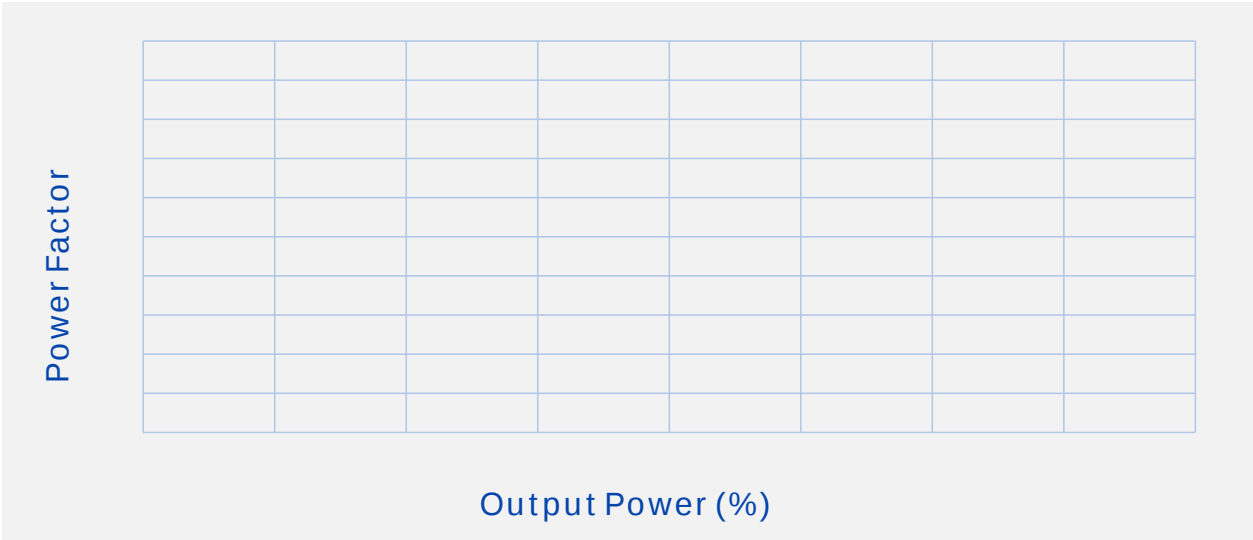

Vs.




Vs.

Vs.

Vs.

Vs.

- 1
- 2
- 3
- PC

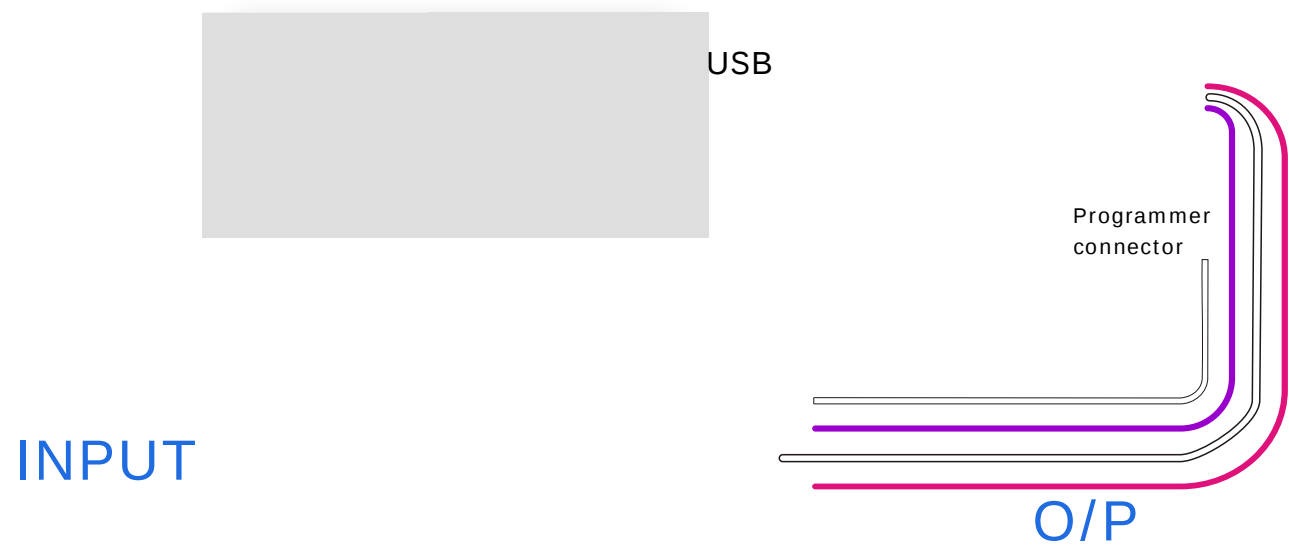

		mm(In.)
	L3	219(8.62)
	W1	71(2.8)
	H	39.6(1.56)
	L1	244(9.61)
	L2	229(9.02)
	W2	34(1.34)
Tc	X	93(3.66)
Tc	Y	35(1.38)



- mm × × =495 × 385 × 162;
- 14
- 1.25kg 18.5kg
-



