




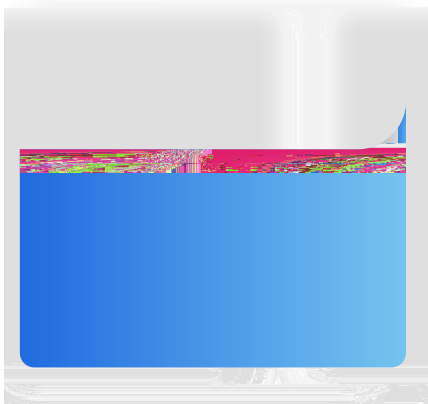



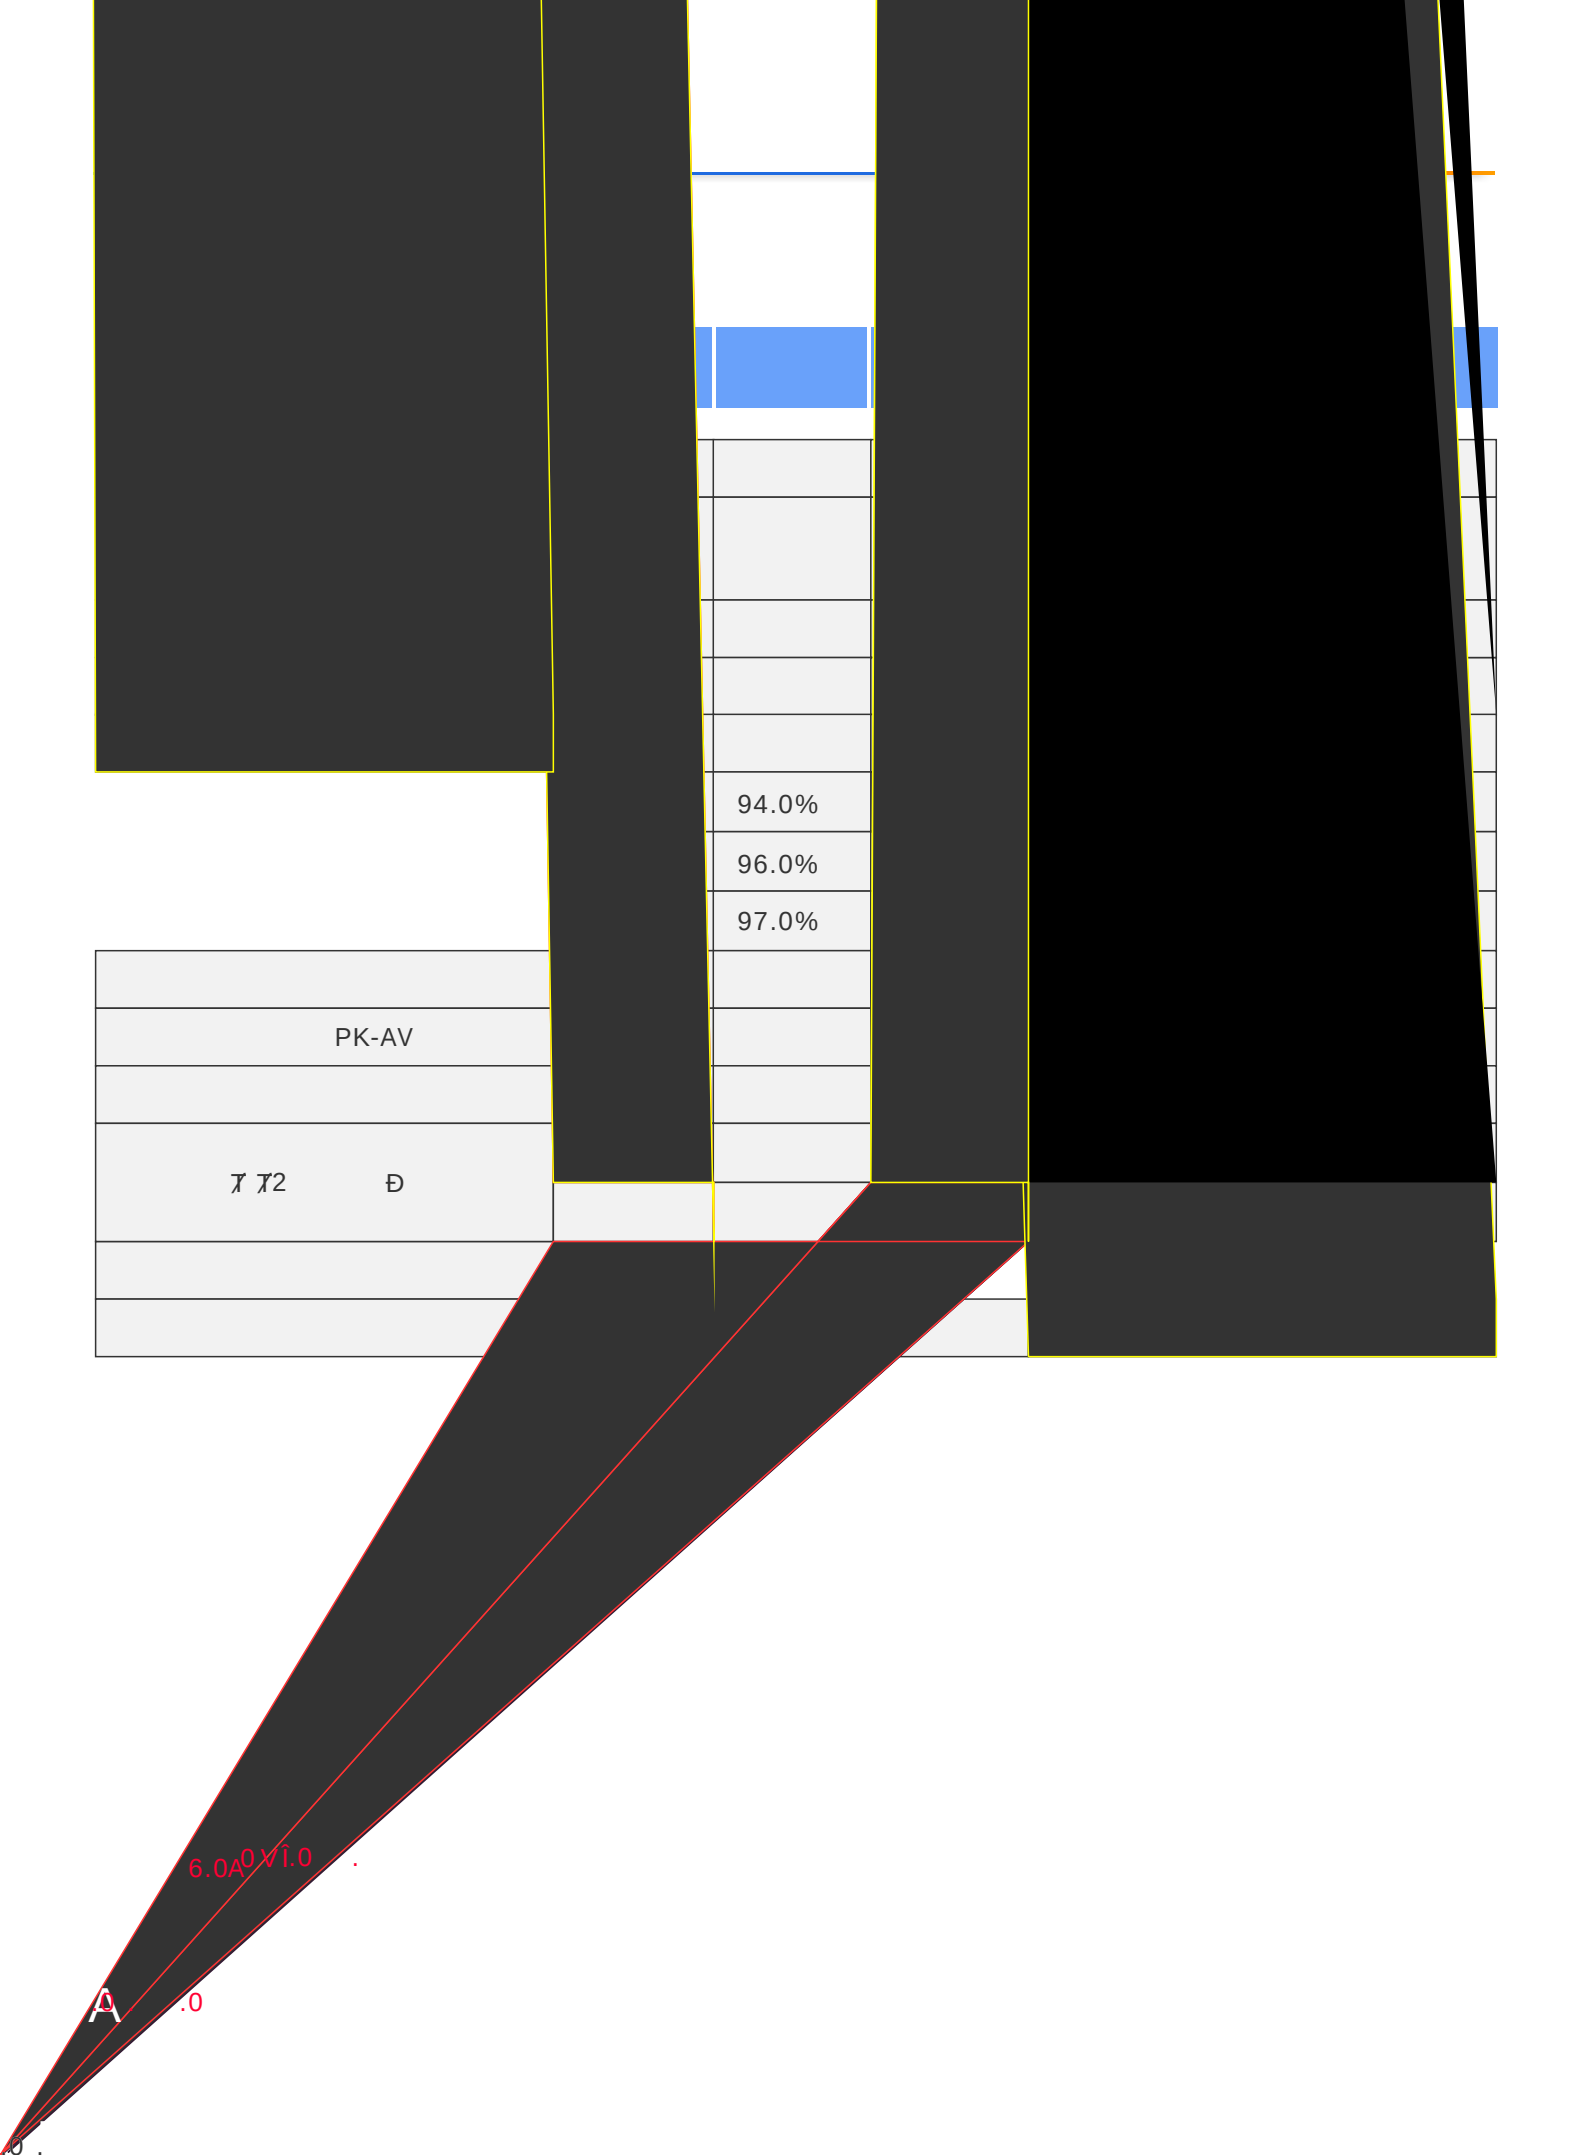


SS-120NM-V300A LED

Wavelength	120nm	Wavelength	120nm	Wavelength	120nm
------------	-------	------------	-------	------------	-------

Tcase		-40	25	+90	
		-40	25	+90	
		10%RH		90%RH	
		5%RH		95%RH	
		-65m		4000m	

RoHS	RoHS	RoHS	RoHS
------	------	------	------

UL/cUL	UL8750		
UL	UL		
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14/2009		
EN61347-2	EN 61347-2-13:2014		
EN61347-1	EN 61347-1:2008+A1:2011+A2:2013		



SS-120NM-V300A LED

Vs. (/AOC)

----- Dimming Window ————— AOC Window

SS-120NM-V300A LED

Vs. (Vin=220Vac)

----- Io=600mA



———— Io=400mA

Vs. (Vin=347Vac)

----- Io=600mA

———— Io=400mA

SS-120NM-V300A LED

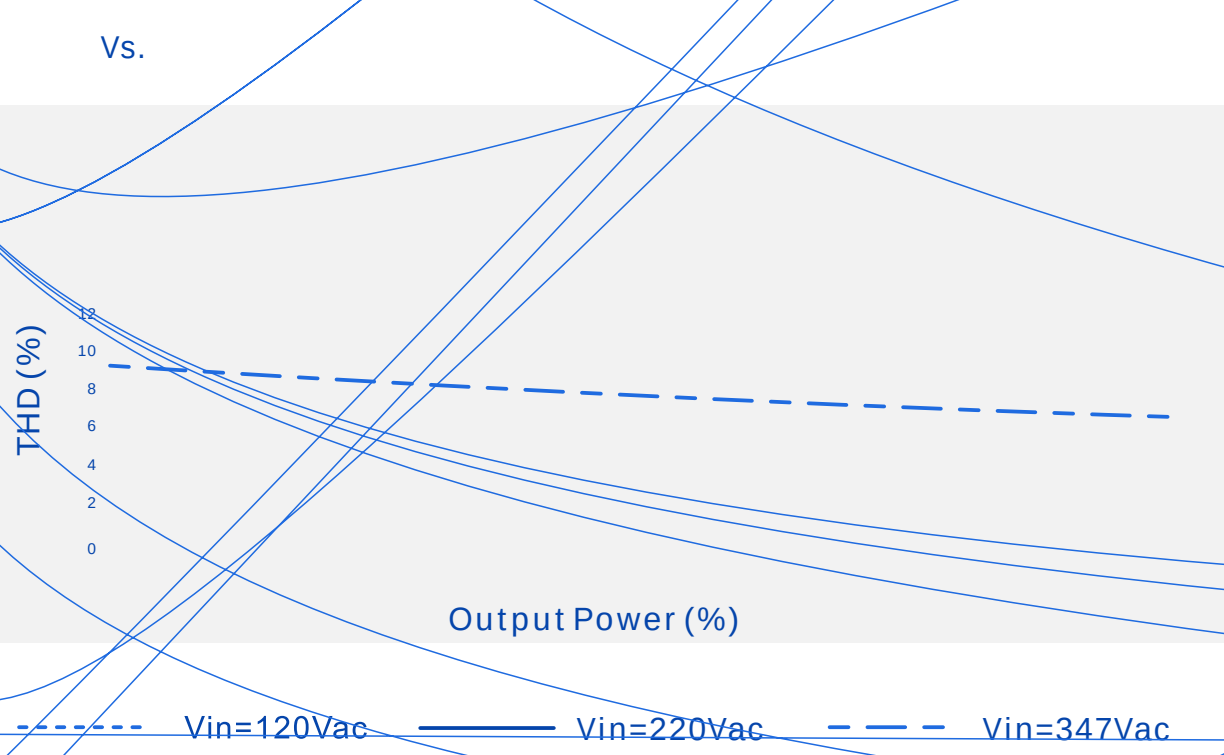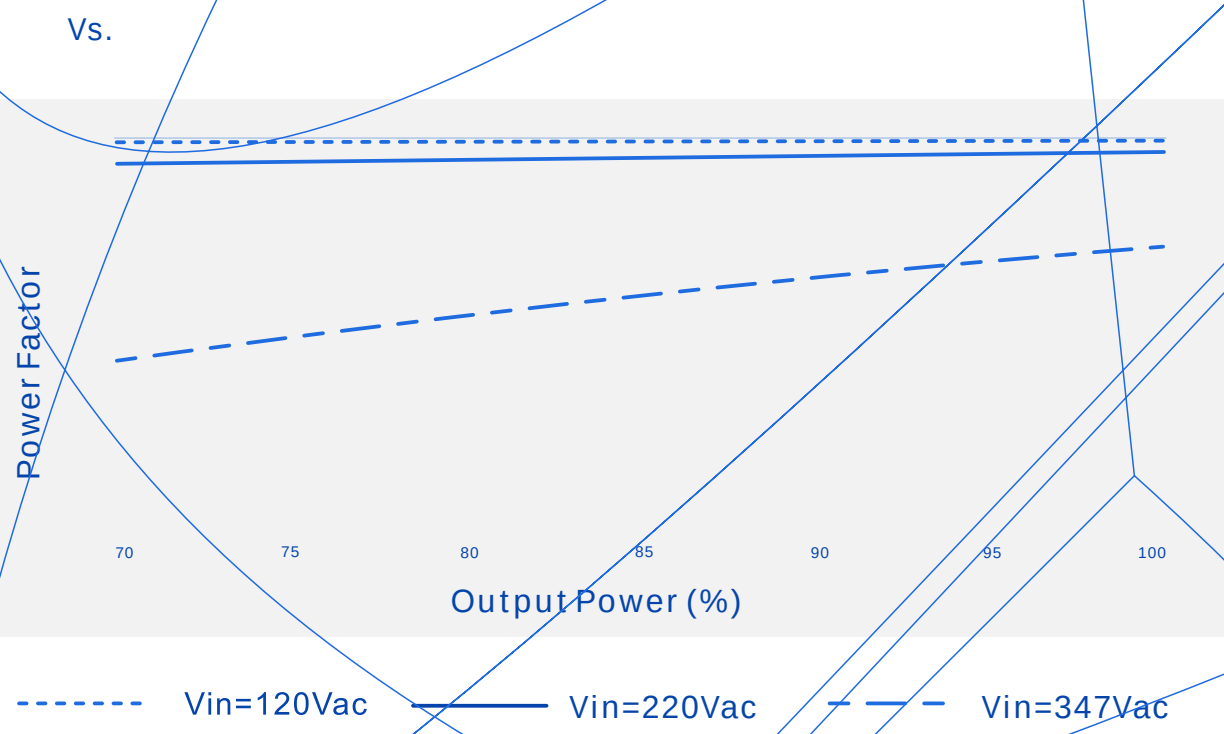

Vs

SS-120NM-V300A LED

SS-120NM-V300A LED



- 1
- 2 LED+ LED-
- 3
- 4 LED
- 5 LED
- 6 LED
- 7

LED

- mm × × =325 × 315 × 165;
- 40
- 0.42kg 17.8kg
-


GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

SS-120NM-V300A LED



V00		2025/10/31	