



: SS-100VH-EXXX

: 100W LED

: V03

: 2026-01-07

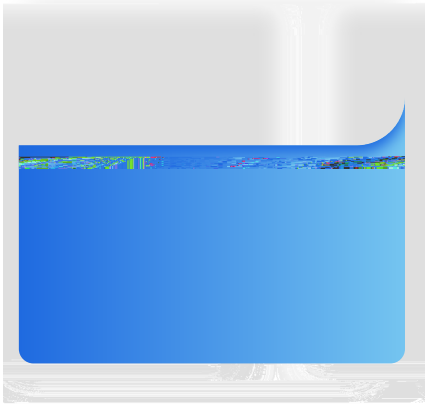




	90Vac		305Vac	
	47Hz		63Hz	
			1.2A	100Vac

(120Vac)			125A	冷机启动
(220Vac)			175A	
(277Vac)			210A	
			5W	220Vac/50Hz
	0.95	0.98		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100%
		8%	10%	220Vac/50Hz
			20%	100-277Vac/50Hz 70-100%

SS-100VH-E LED

(SS-100VH-E95B)


	48V		95V	
	66V		95V	Po=Vo*Io=100W
	1.05A		1.5A	1.5A 66V,1.05A 95V
AOC	0.35A		1.5A	
			110V	
@120Vac	88.5%	89.5%		95V/1.05A
@220Vac	89.5%	90.5%		95V/1.05A
@277Vac	90.0%	91.0%		95V/1.05A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
			+2%	
			+2%	
	-0.03%		+0.03%/	0 90
	90		110	



72-95V
Po=Vo*Io=100W
1.05A 95V,0.7A 143V
143V/0.7A
143V/0.7A
143V/0.7A
120Vac
220Vac
0 90

	90	

(SS-100VH-E286B)

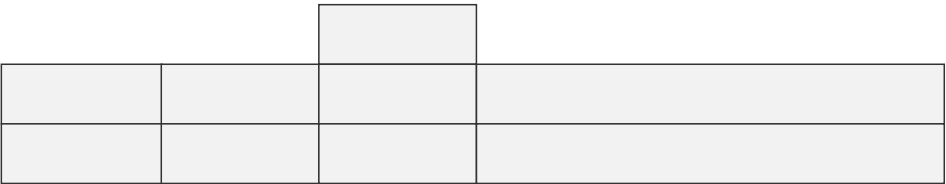


SS-100VH-E LED

0-10V		0V		12V	DIM+ 110uA DIM+/DIM- 0-5V
		10%Iomax		100%Ioset	
		0V		10V	
10-0V		0V		10V	DIM+ 40uA DIM+/DIM- 5-0V
	PWM	9.8V		10.2V	DIM+ 110uA DIM+/DIM-
	PWM	0V		0.3V	
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
0-10V		0.7V	0.8V	0.9V	75%
		0.8V	0.9V	1.0V	
10-0V		9.0V	9.2V	9.4V	
		8.8V	9.0V	9.2V	




Tcase	-40			
	-40			
	1			

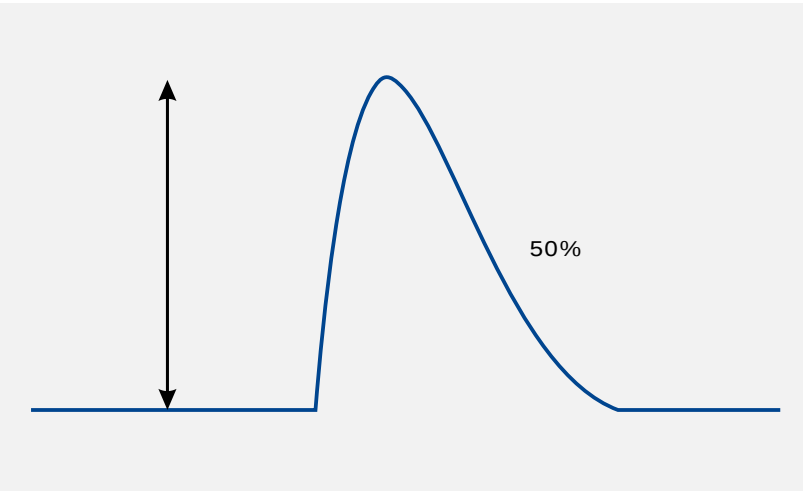

		T(@10%)	T(@50%)
120Vac	125A	230uS	
220Vac	175A		100uS
277Vac	210A	175uS	


Vs. (/AOC)




Vs.

(/AOC)


Ø




Vs. (Vin=220Vac)

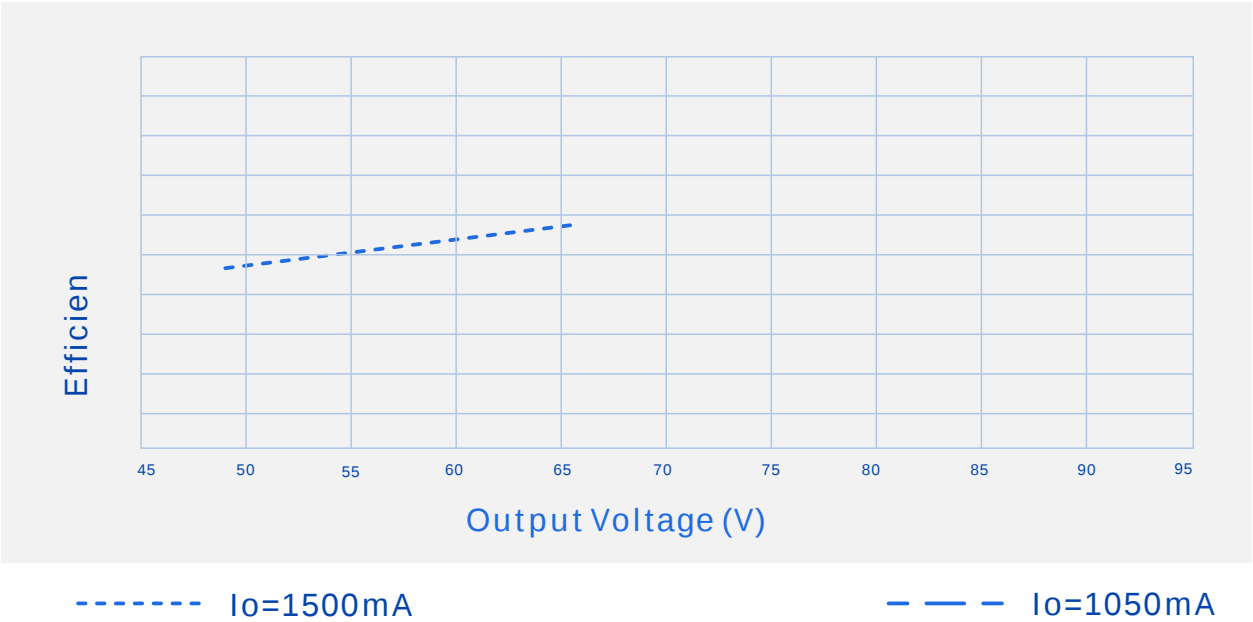


Vs. (Vin=120Vac)

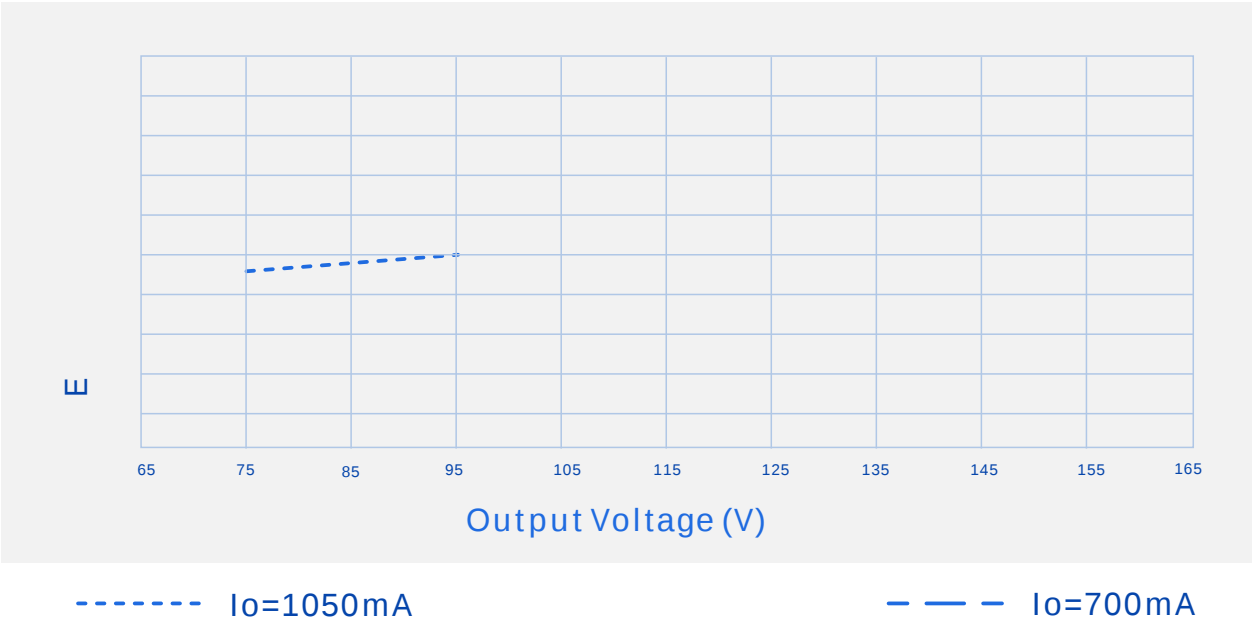



(SS-100VH-E95B)


Vs.



Vs.


(SS-100VH-E143B)

Vs.



Vs.

(SS-100VH-E286B)




SS-100V

LED

Vs.

Vs.

- 1
- 2
- 3
- PC

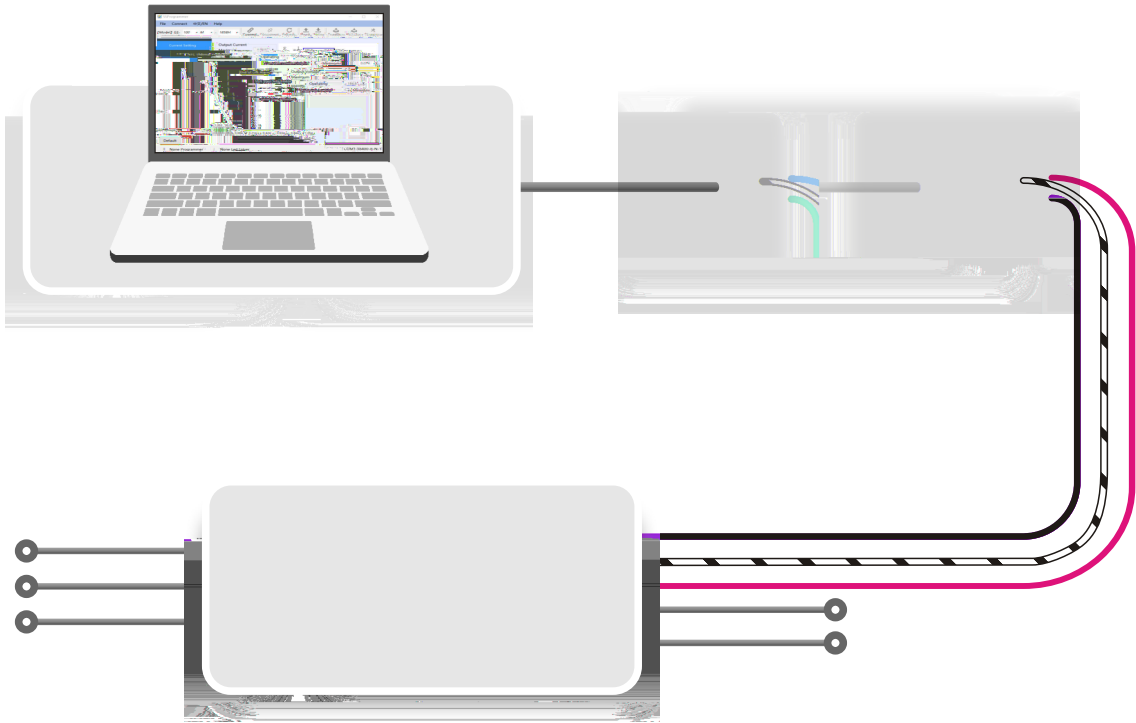


SS-PROG-LINK

SS-100V


LED







V00		2022/12/12	

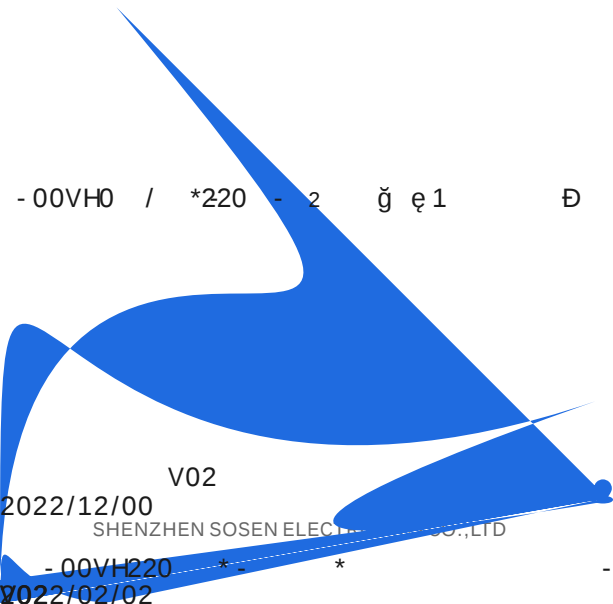

- 00VH0 / *220 - 2 ģ ę1 Đ

V02
2022/12/00
SHENZHEN SOSEN ELECTRONICS CO.,LTD
- 00VH220 * -
2022/02/02

1号楼10楼
i

233号 86-755-29358800

2022/02/02