



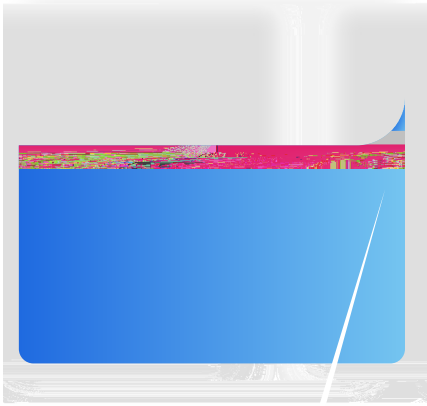




--	--	--	--	--

LED

[illegible]

SS-150NL-E

LED



		0V		12V	
	2	Đ	10%Iomax	100%Ioset	
		0V		10V	
	PWM	9.8V		10.2V	
	PWM	0V		0.3V	
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	
		0%Iomax		100%Ioset	

	≤ 85	≥ 50,000 hours	
MTBF	200,000 hours	220Vac, , 25 (MIL-HDBK-217F)	
	90		
	5	85	
	455g		
	185mm*45mm*31mm	x x	

SS-150NL-E


LED

--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--


UL/cUL	UL8750		
TUV			
RCM	AS/NZS61347.2.13		
BIS	IS1		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

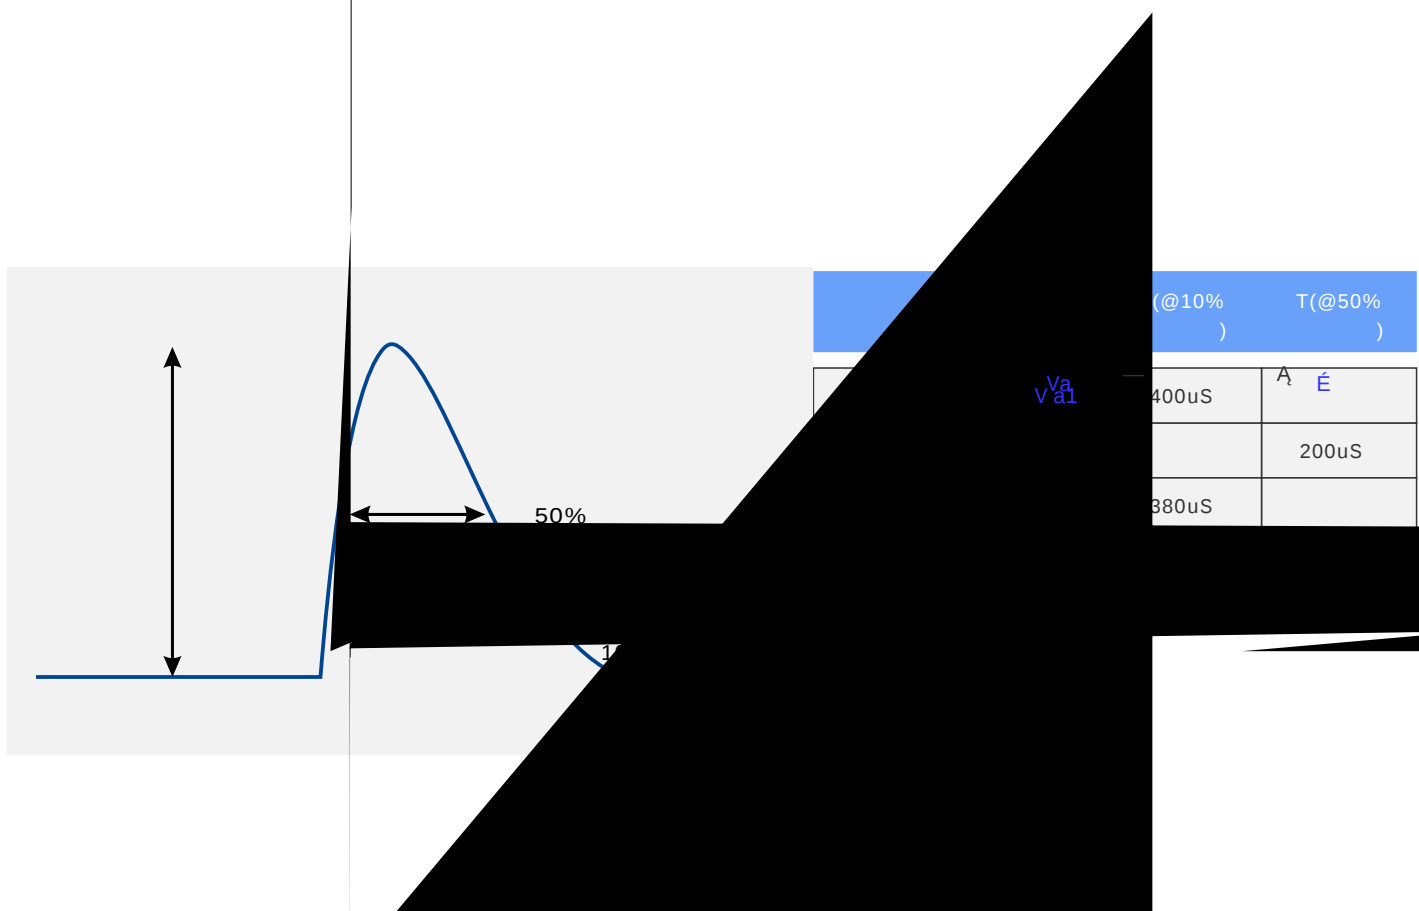

Vs. (/AOC)

Vs. (Vin=120Vac)


Vs. (Vin=220Vac)

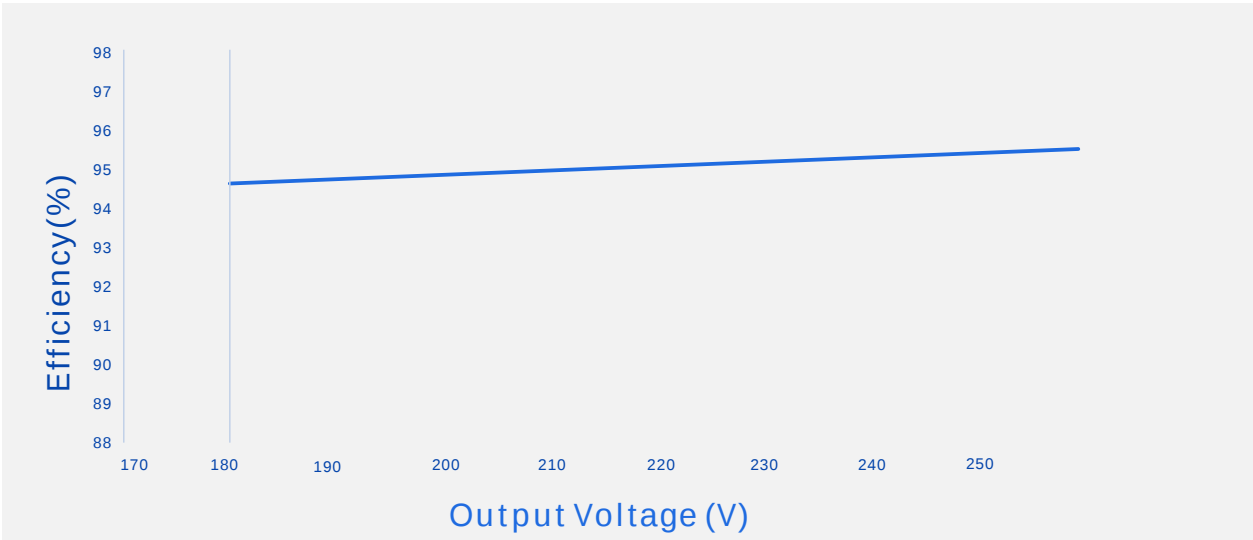

Vs. (Vin=277Vac)

Vs.

Vs.



Vs.

Vs.

SS-150NL-E

LED

mm(In.)		
	L3	168.5(6.63)
	W2	45(1.77)
	H	31(1.22)
	L1	185(7.28)
	L2	178(7.01)
	W1	32(1.26)
Tc	X	28(1.1)
Tc	Y	24(0.94)



V00		2022/08/26	
V01	SPD	2022/10/26	
V02		2023/02/01	
V03	0-10V	2023/03/01	
V04		2023/05/15	
V05		2023/09/11	
V06		2026/01/12	