




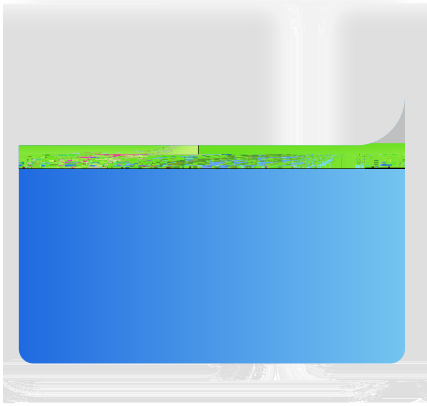




	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			1.96A	120Vac

(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100%
		8%	10%	220Vac/50Hz
			20%	100-277Vac/50Hz 70-100%





0h


	PWM	9.8V		10.2V	
	PWM	0V		0.3V	
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	
		10%I _{max}		100%I _{set}	

	≤ 85	≥ 50,000 hours	
MTBF	000,000 hours		220Vac, , 25 (MIL-HDBK-217F)
	90		
	5		
	570g		
	220mm*45mm*31mm		x x




T(@			

Vs. (/AOC)




----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)




Vs.

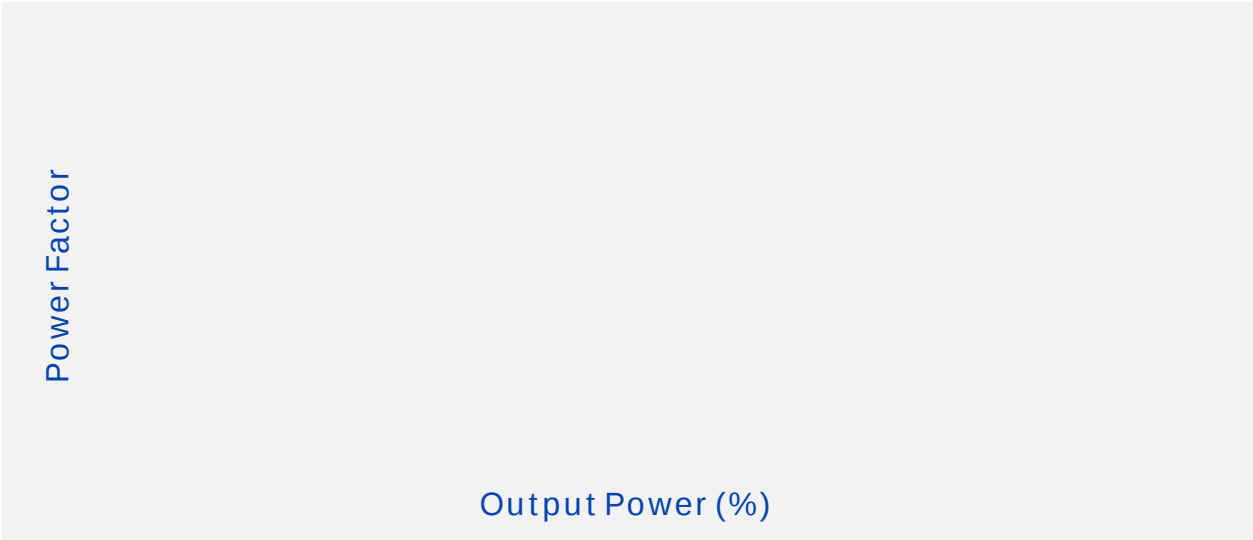


Vs.


Vs.

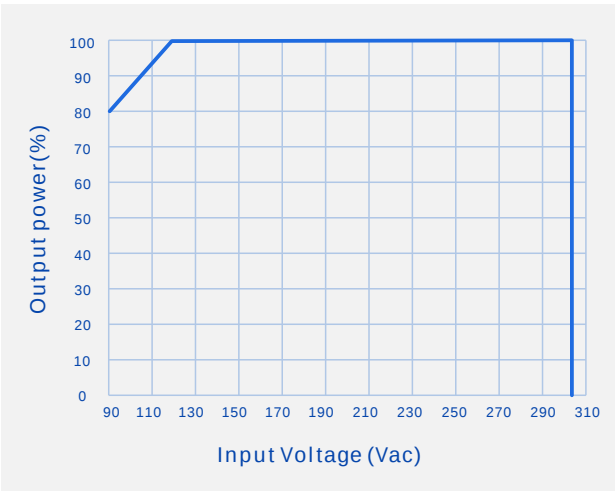


Vs.

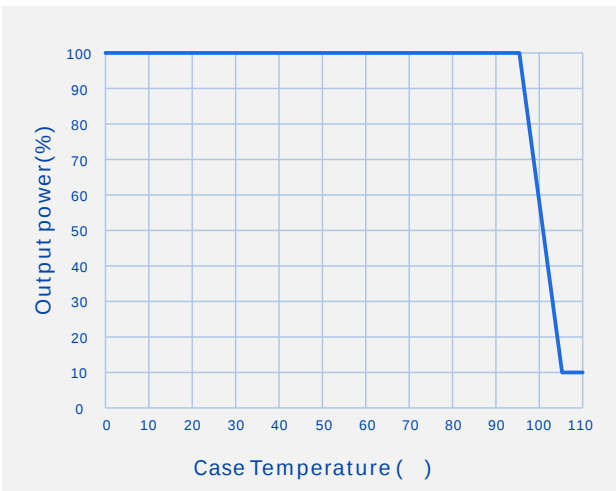

Vs.

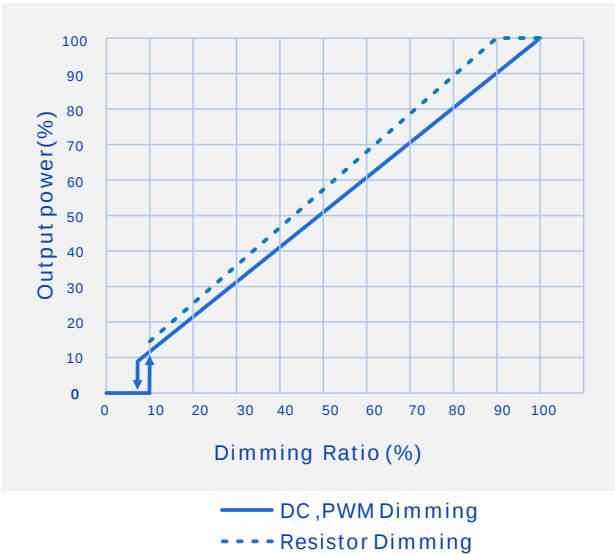

Vs.

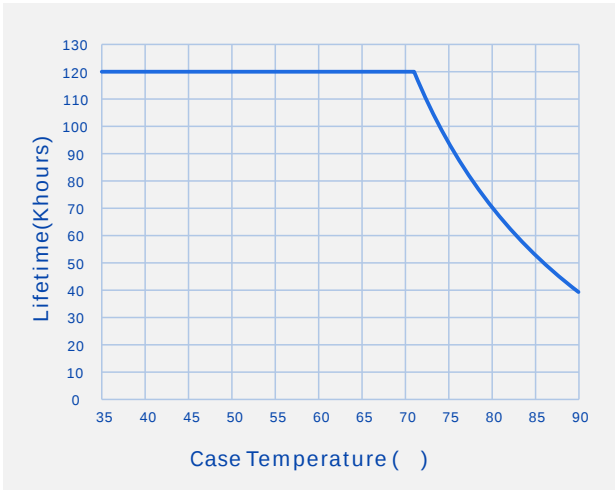

SS-200NH-E(ISO)

LED

		mm(In.)
	L3	205(8.07)
	W2	45(1.77)
	H	31(1.22)
	L1	220(8.66)
	L2	213(8.39)
	W1	32(1.26)
Tc	X	32(1.26)
Tc	Y	24(0.94)

1

2

AC

DC

10±2mm;

LED

DIM

/

/

:

;



V00		2026/01/09	