

--	--	--	--	--


(SS-220PA-314F)

	104V		314V	104-210V
	210V		314V	Po=Vo*Io=220W
	0.7A		1.05A	1.05A 210V,0.7A 314V
AOC	0.2A		1.05A	NFC
			340V	
@230Vac	92.5%	94.5%		314V/0.7A
	-5%		+5%	
PK-AV		5%	10%	

			10%	
			0.7S	230Vac ,

220W NFC

DALI-2 & D4i



220W NFC

DALI-2 & D4i

		21.6V	24V	26.4V	“ DA- ”
				30V	“ DA- ”
		0		125mA	“ DA- ”
		0		250mA	“ DA- ” 6ms 250mA 2.2ms 125mA
DALI-2		12V	16V	20V	
DALI-2		50mA		60mA	
	≤ 80	≥ 100,000 hours			80%
MTBF		250,000 hours			230Vac, , 25 (MIL-HDBK-217F)
		IP20			
		90			
		8			80
		850g			
		171mm*101mm*36mm			x x

1. 25 LED
- 2.DALI-2


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--


EMI/EMS	/	
---------	---	--



2 6




Vs.

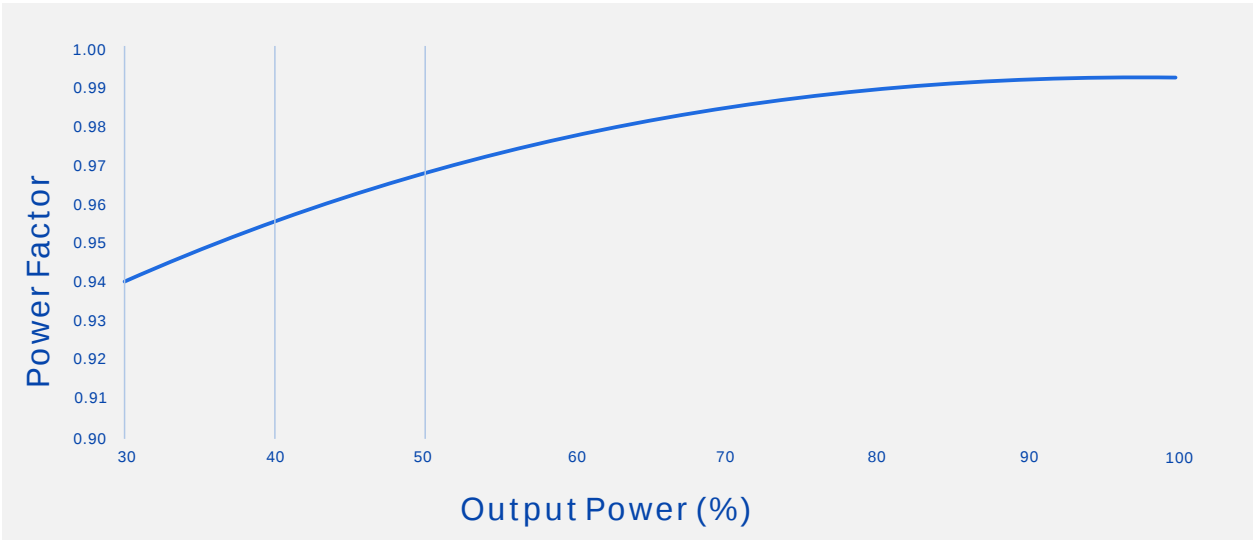

— Vin=230Vac



Vs.

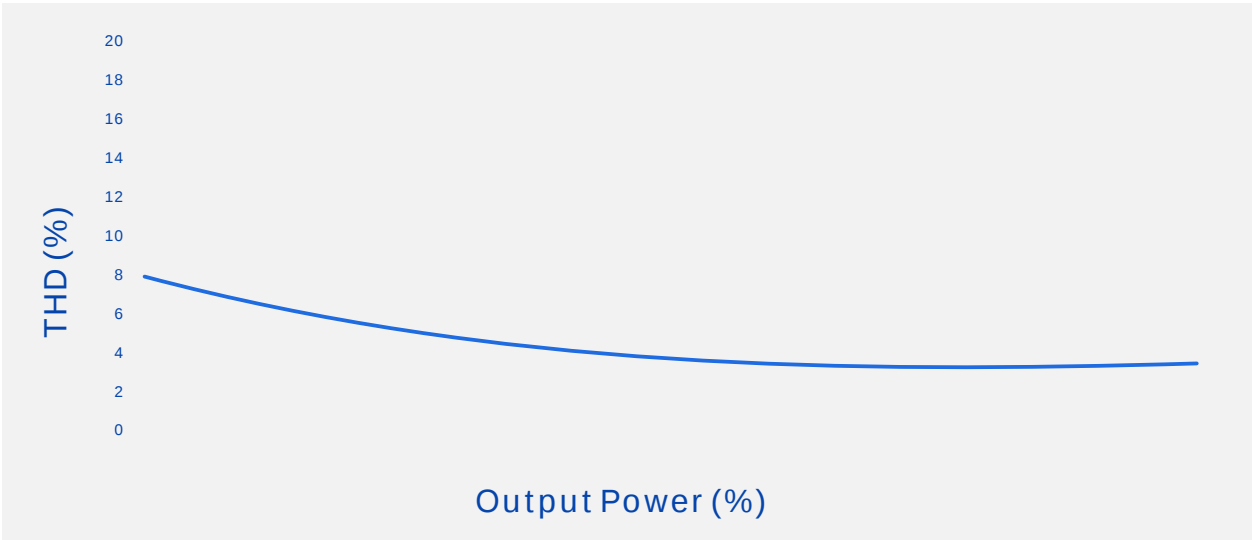


— Vin=230Vac

Vs.

Vs.

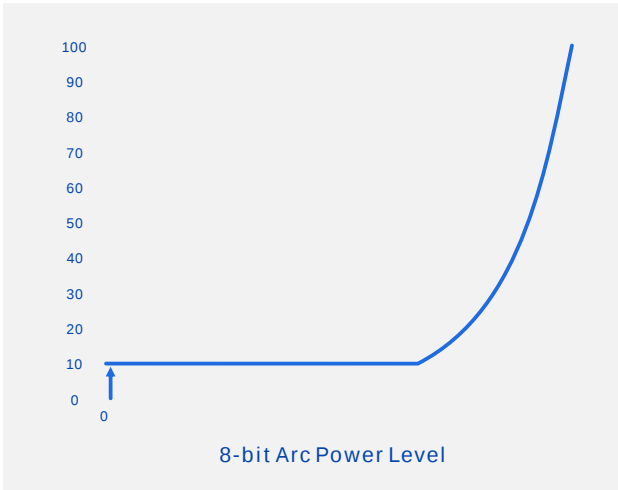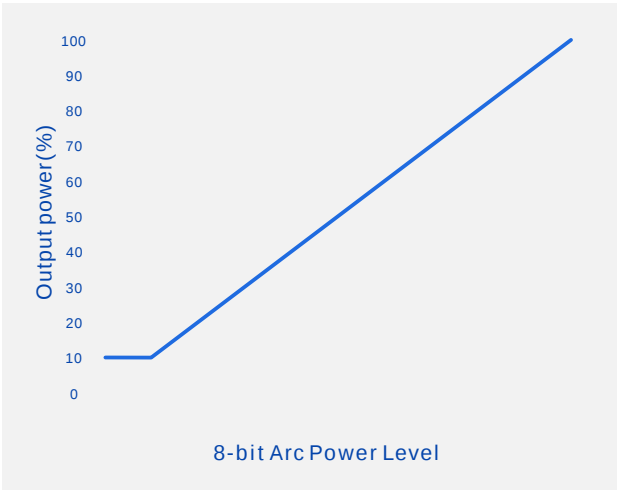






- AC**
0.2-1.5mm², 16-24AWG, Solid/Stranded Wire
Strip length 8.5-9.5mm
- DC**
0.2-1.5mm², 16-24AWG, Solid/Stranded Wire
Strip length 8.5-9.5mm
- DIM**
0.2-1.5mm², 16-24AWG, Solid/Stranded Wire
Strip length 8.5-9.5mm

1

LED

;

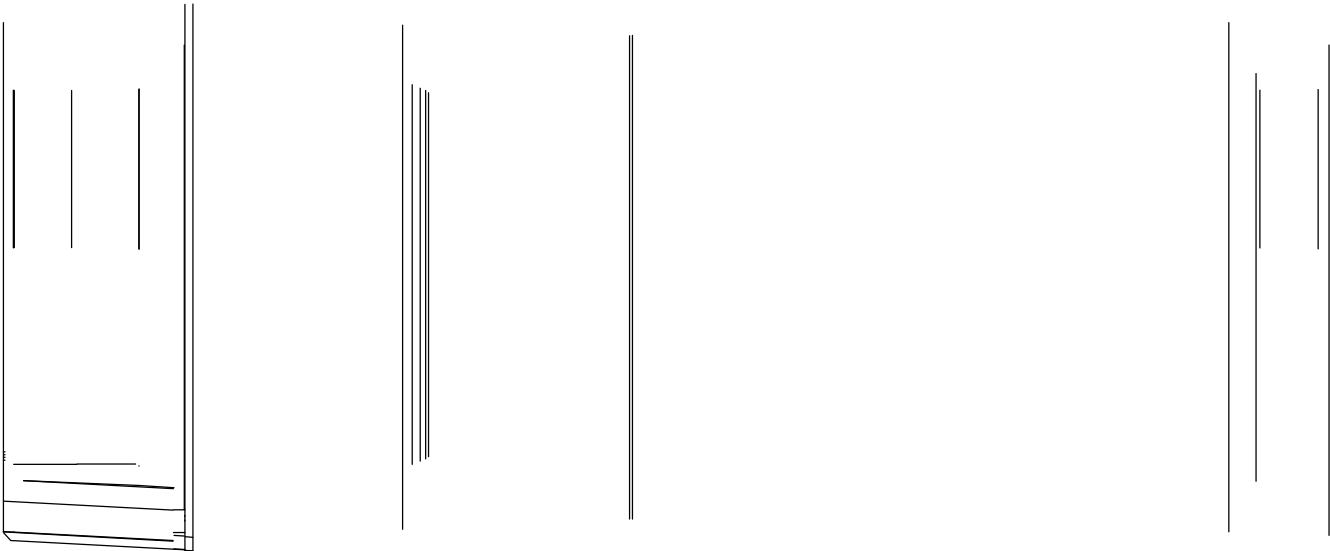



~~XXXXXXXXXX~~ 2

RoHS (2011/65/EU 201613/EU

