



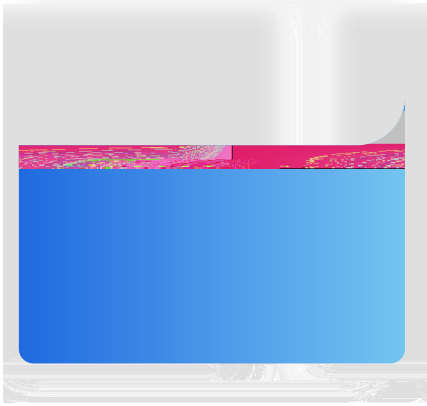



W				


[illegible]

--	--	--	--	--

	180V		2	
	200V			
	0.92A			
AOC	0.84A			

--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

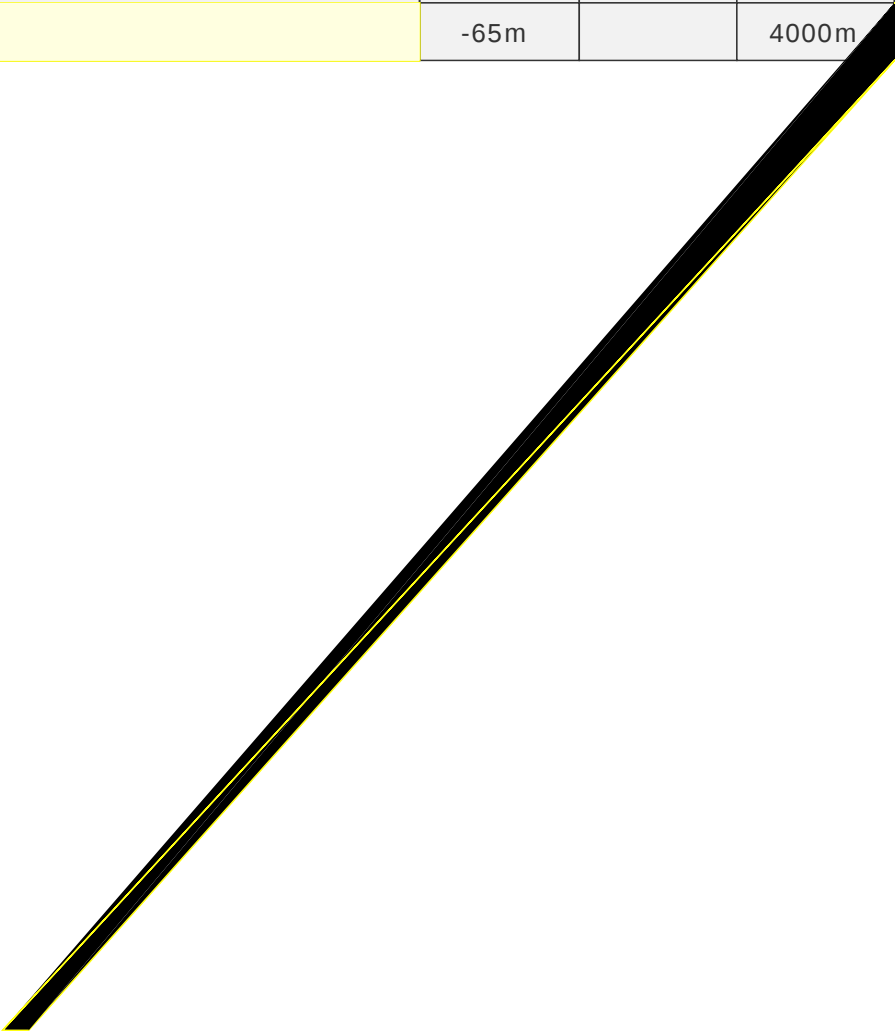


SS-240NL-E

LED

		TUV	
		1500Vac	
		3000Vac	
		250Vac	
	≥ 10MΩ		500Vdc
	≤ 0.1Ω		25A/1min
	≤ 0.75mA		277Vac

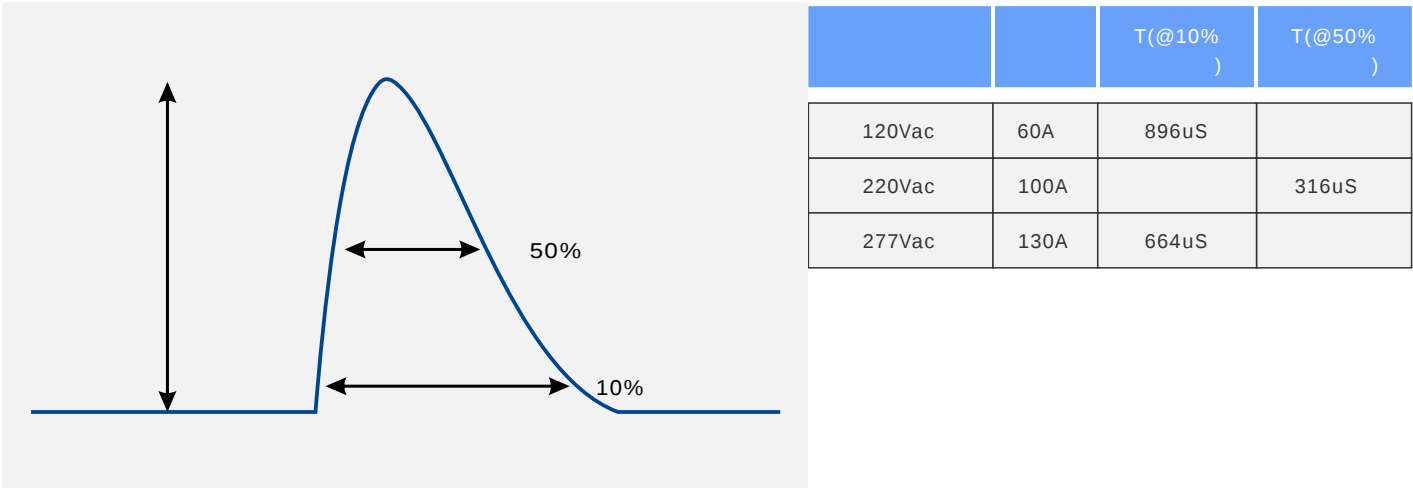


Vs. (/AOC)




----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)



Vs.

Vs.

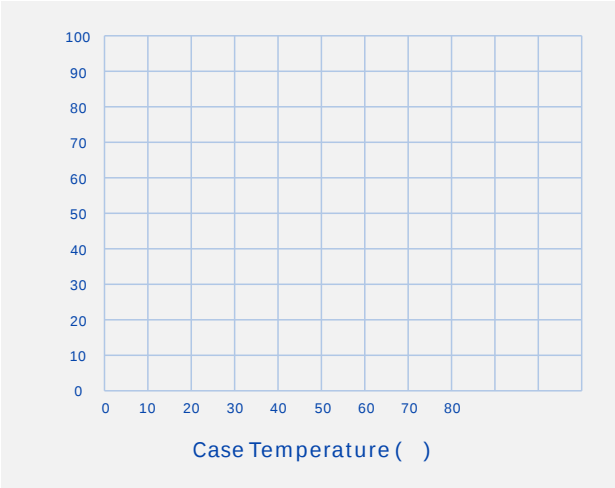

Vs.

Vs.

SS-240NL-E

LED

1

2

AC

DC

DIM

LED

/

;

Tc	X	28(1.1)
Tc	Y	24(0.94)

- mm x x =445 x 300 x 153;
- 27
- 0.53kg 15.15kg
-

Sx0

GB 3873 83
1 @ S Å

Sx0 34) a i 3• 0i 34) ~y%

SS-240NL-E LED

2

V000		2022/08/26	