

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			2.4A	100Vac


(120Vac)			60A	
(220Vac)			110A	冷机启动
(277Vac)			125A	冷机启动
			3W	220Vac/50Hz , 空载
	0.96	0.98		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 70-100%载

d\$D ĩ




	22V		56V	22-36V
	36V		56V	$P_o = V_o \cdot I_o = 200W$
	3.6A		5.6A	5.6A 36V, 3.6A 56V
AOC	2.8A		5.6A	
			60V	













Vs. (Vin=220Vac)

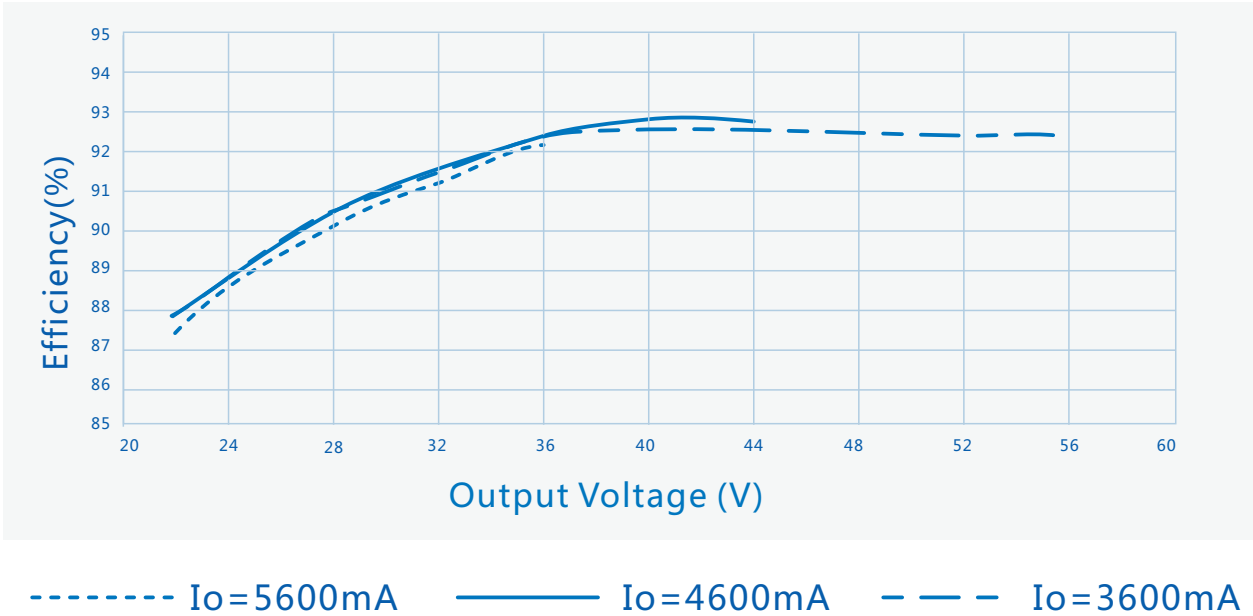

Vs. (Vin=277Vac)

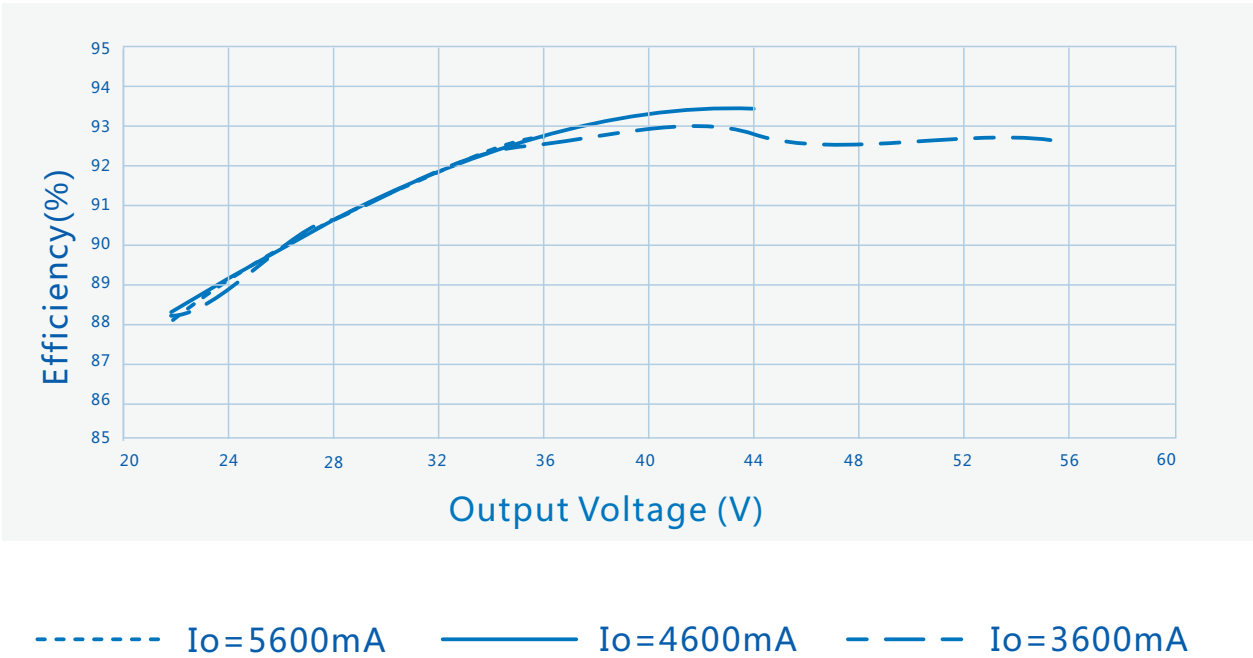

Vs.

Vs.

Vs.







1 , , 704

2

- mm) : × × =495×385×162;

- 14

- 1.1kg 16.4kg

-

。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。





V00		2018/10/18	

