




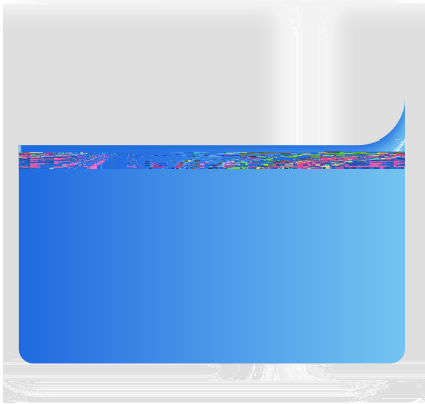

c

c

cc555



	30V		62V	30-38V
	38V		62V	Po=Vo*Io=30W
	0.5A		0.8A	0.8A 38V,0.5A 62V
AOC	0.1A		0.8A	
			80V	
@220Vac	85.0%	87.0%		62V/0.5A
@277Vac	85.5%	87.5%		62V/0.5A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	220Vac,
	-2%		+2%	
	-5%		+5%	
		0.05%/		0 90
	90	100	110	

avoc

SS-30GA-E

LED


	≤ 80	≥ 50,000 hours	80%
MTBF		208,000 hours	220Vac, , 25 (MIL-HDBK-217F)
		90	
		5	80
		405g	
		105mm*66mm*31.5mm	x x

SS-30GA-E LED



SS-30GA-E

LED

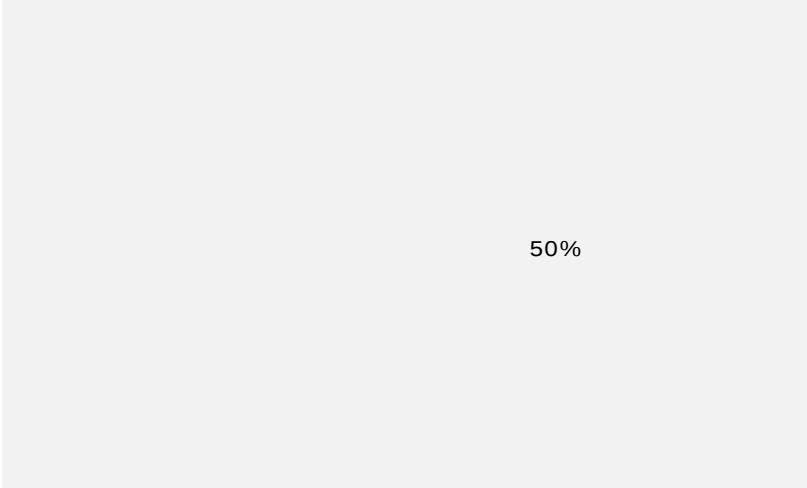


T(@10%)		T(@50%)	
220Vac	60A		160uS

(SS-30GA-E62*)

Vs. (/AOC)

(SS-30GA-E100*)


Vs. (/AOC)



----- Dimming Window ————— AOC Window

oa

Vs.

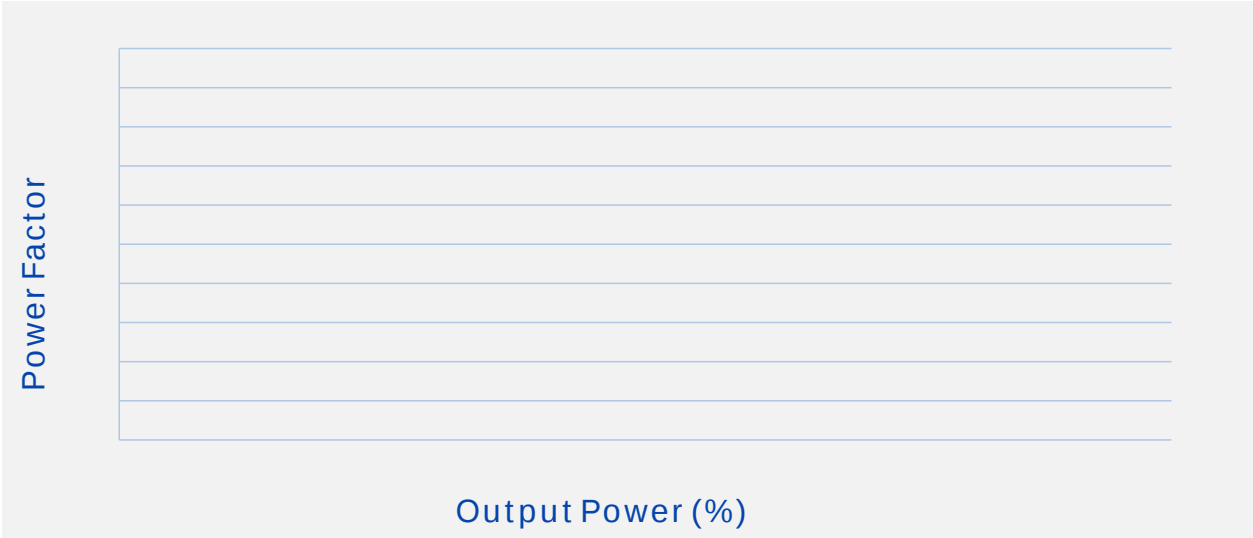


———— Vin=220Vac



SS-30GA-E

LED

		10V()	
--	--	-----------	--

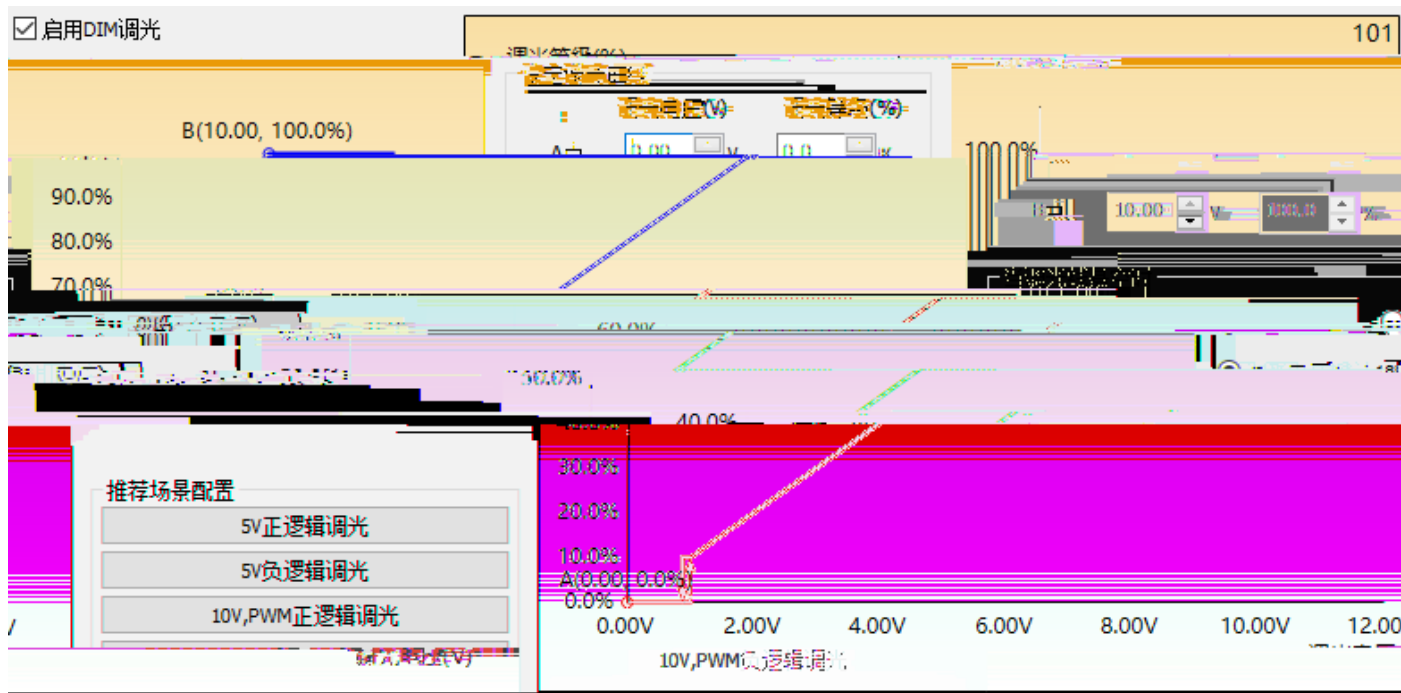







-

mm

×

×

=495 × 385 × 162;

-

28

-

0.405kg

12.5kg

-

GB 3873

83

1

RoHS

RoHS

(2011/65/EU)

2015/863/EU

