



SS-320M LED

“ * ”

“ * ”	DALI (:D)	AUX 12V (:H)	NTC (:N)	Timing	0-10V/PWM Dim /Resistor (:B)	
BH			✓	✓	✓	

--	--	--	--	--	--	--

		277Vac		480Vac	
		249Vac		528Vac	
		47Hz	50/60Hz	63Hz	
				1.8A	277Vac
				360W	277Vac
	(277Vac)			50A	
	(347Vac)			70A	
	(480Vac)			90A	
				1.5W	347Vac/60Hz ,
		0.93	0.95		347Vac/60Hz
		0.90			277-480Vac 80%-100%
			7%	10%	347Vac/60Hz
				20%	277-480Vac 80%-100%

(SS-320M-56BH)

	32V		56V	32-56V
	38V		56V	Po=V
	5.7A		8.4A	8.4A 38V 5.7A 56V
AOC	0.7A		8.4A	
			60V	
		92.0%		56V 5
		93.0%		
		93.0%		
			+5%	
PK-AV		5%	10%	
			10%	
_ e) -			1S	277Vac
			1S	347Vac
a a ğ				

50

@2

@3

@4

PK-AV

114


2.1


%/

(SS-320M-428BH)

--	--	--	--	--

	214V		428V	214-305V
	305V		428V	Po=Vo*Io=320W
	0.75A		1.05A	1.05A 305V 0.75A 428V
AOC	0.1A		1.05A	
			440V	

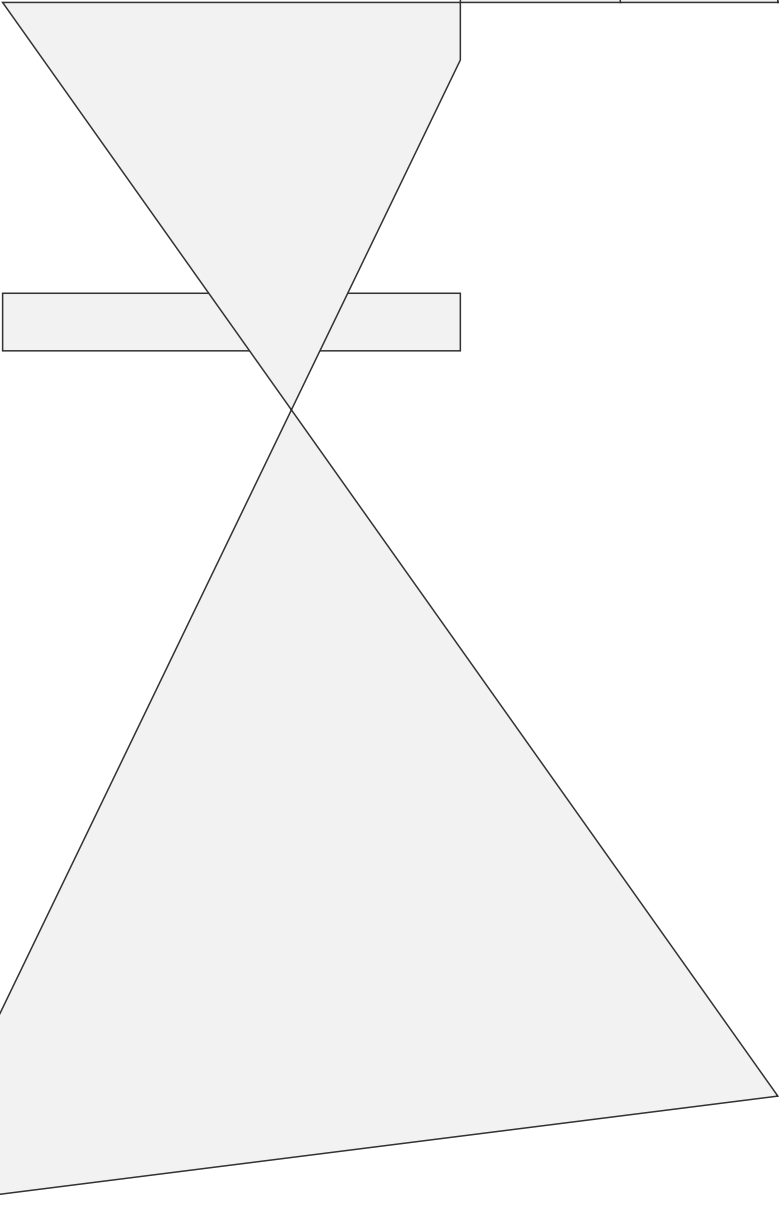




--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL			
TU			

0-51100%~α•FRS™™ 2w 7±2

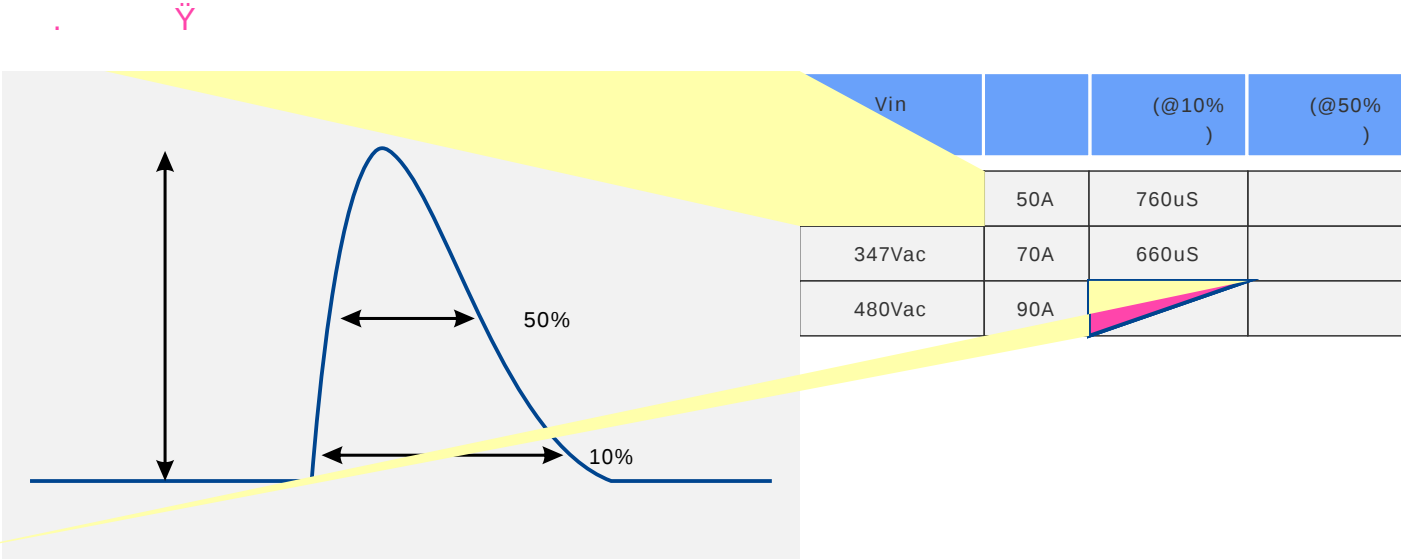


Vs.

/AOC


Vs.

/AOC




Vs. /AOC

Vs. (Vin=277Vac)

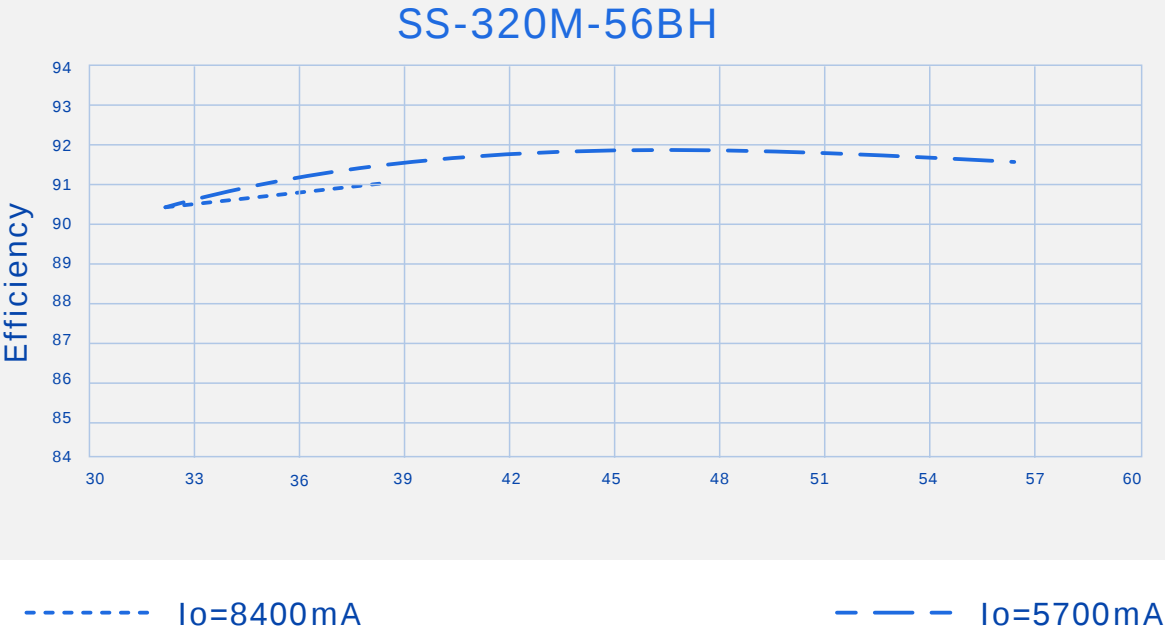


Vs. (Vin=347Vac)

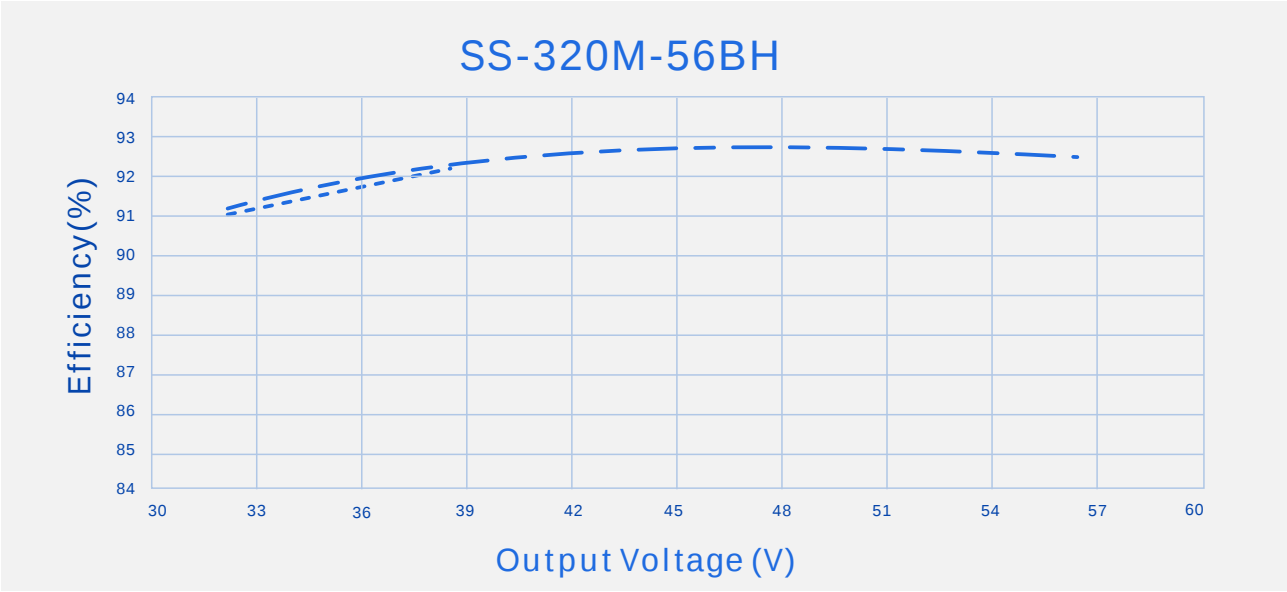

----- Io=8400mA


- . - . Io=5700mA

Vs. (Vin=480Vac)

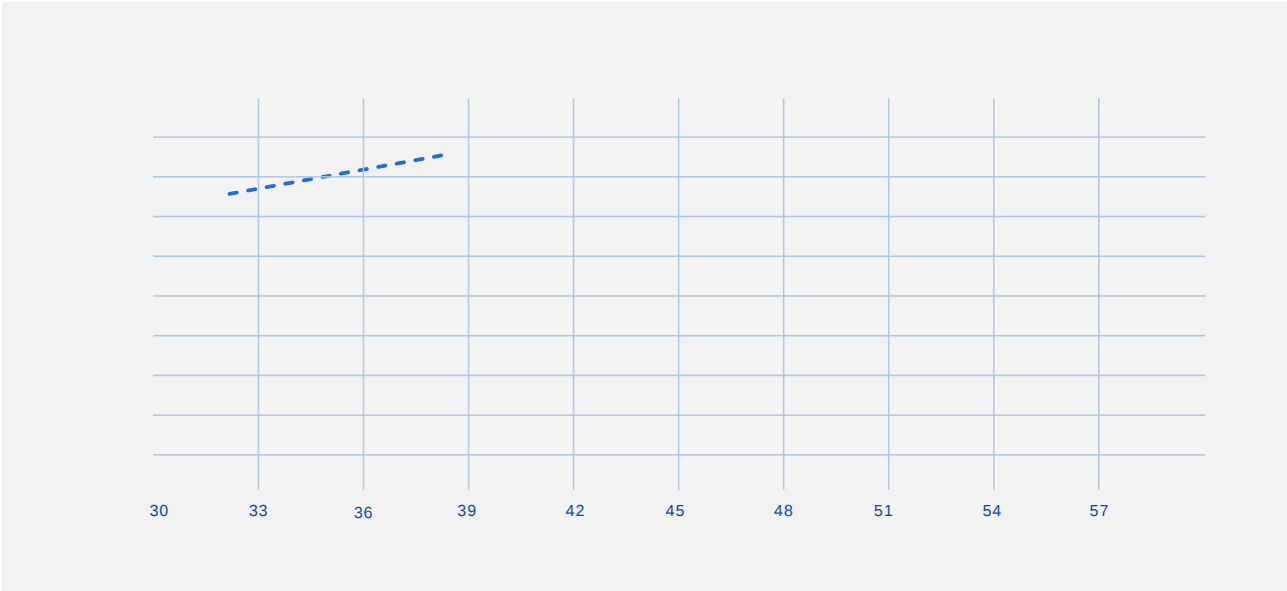

- . - .

Vs. (Vin=277Vac)

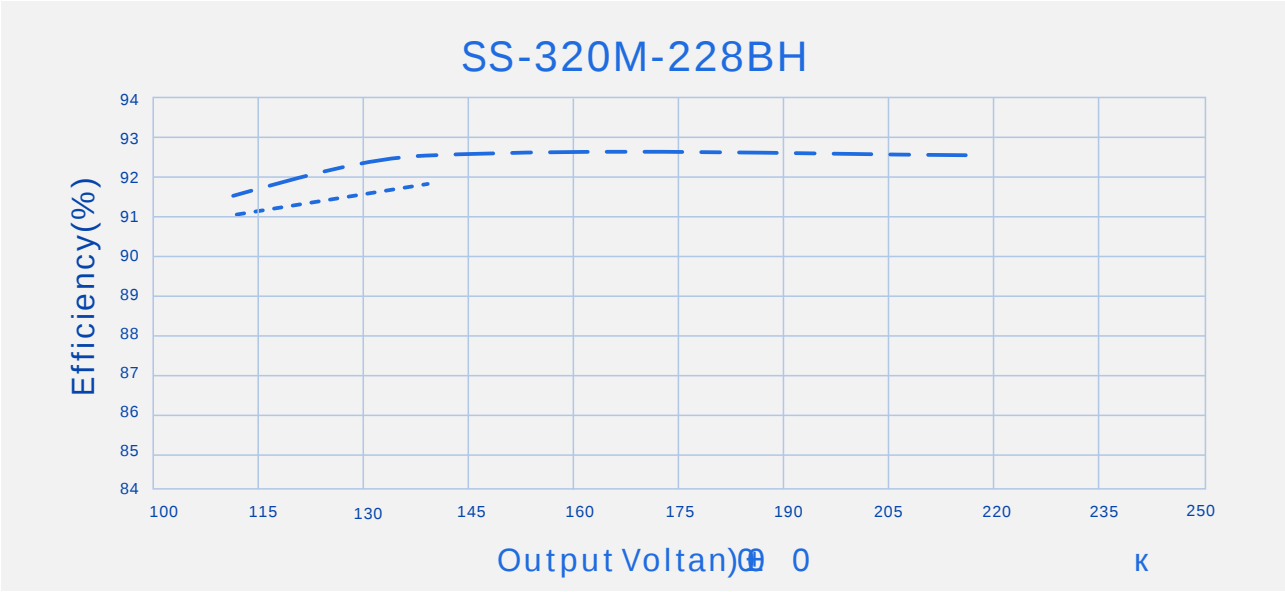

----- Io=2100mA

- . - Io=1400mA

Vs. (Vin=347Vac)



Vs. (Vi



Vs.

(V


V

.


(V



Vs.




Vs.




Vs.

Vs.

LED

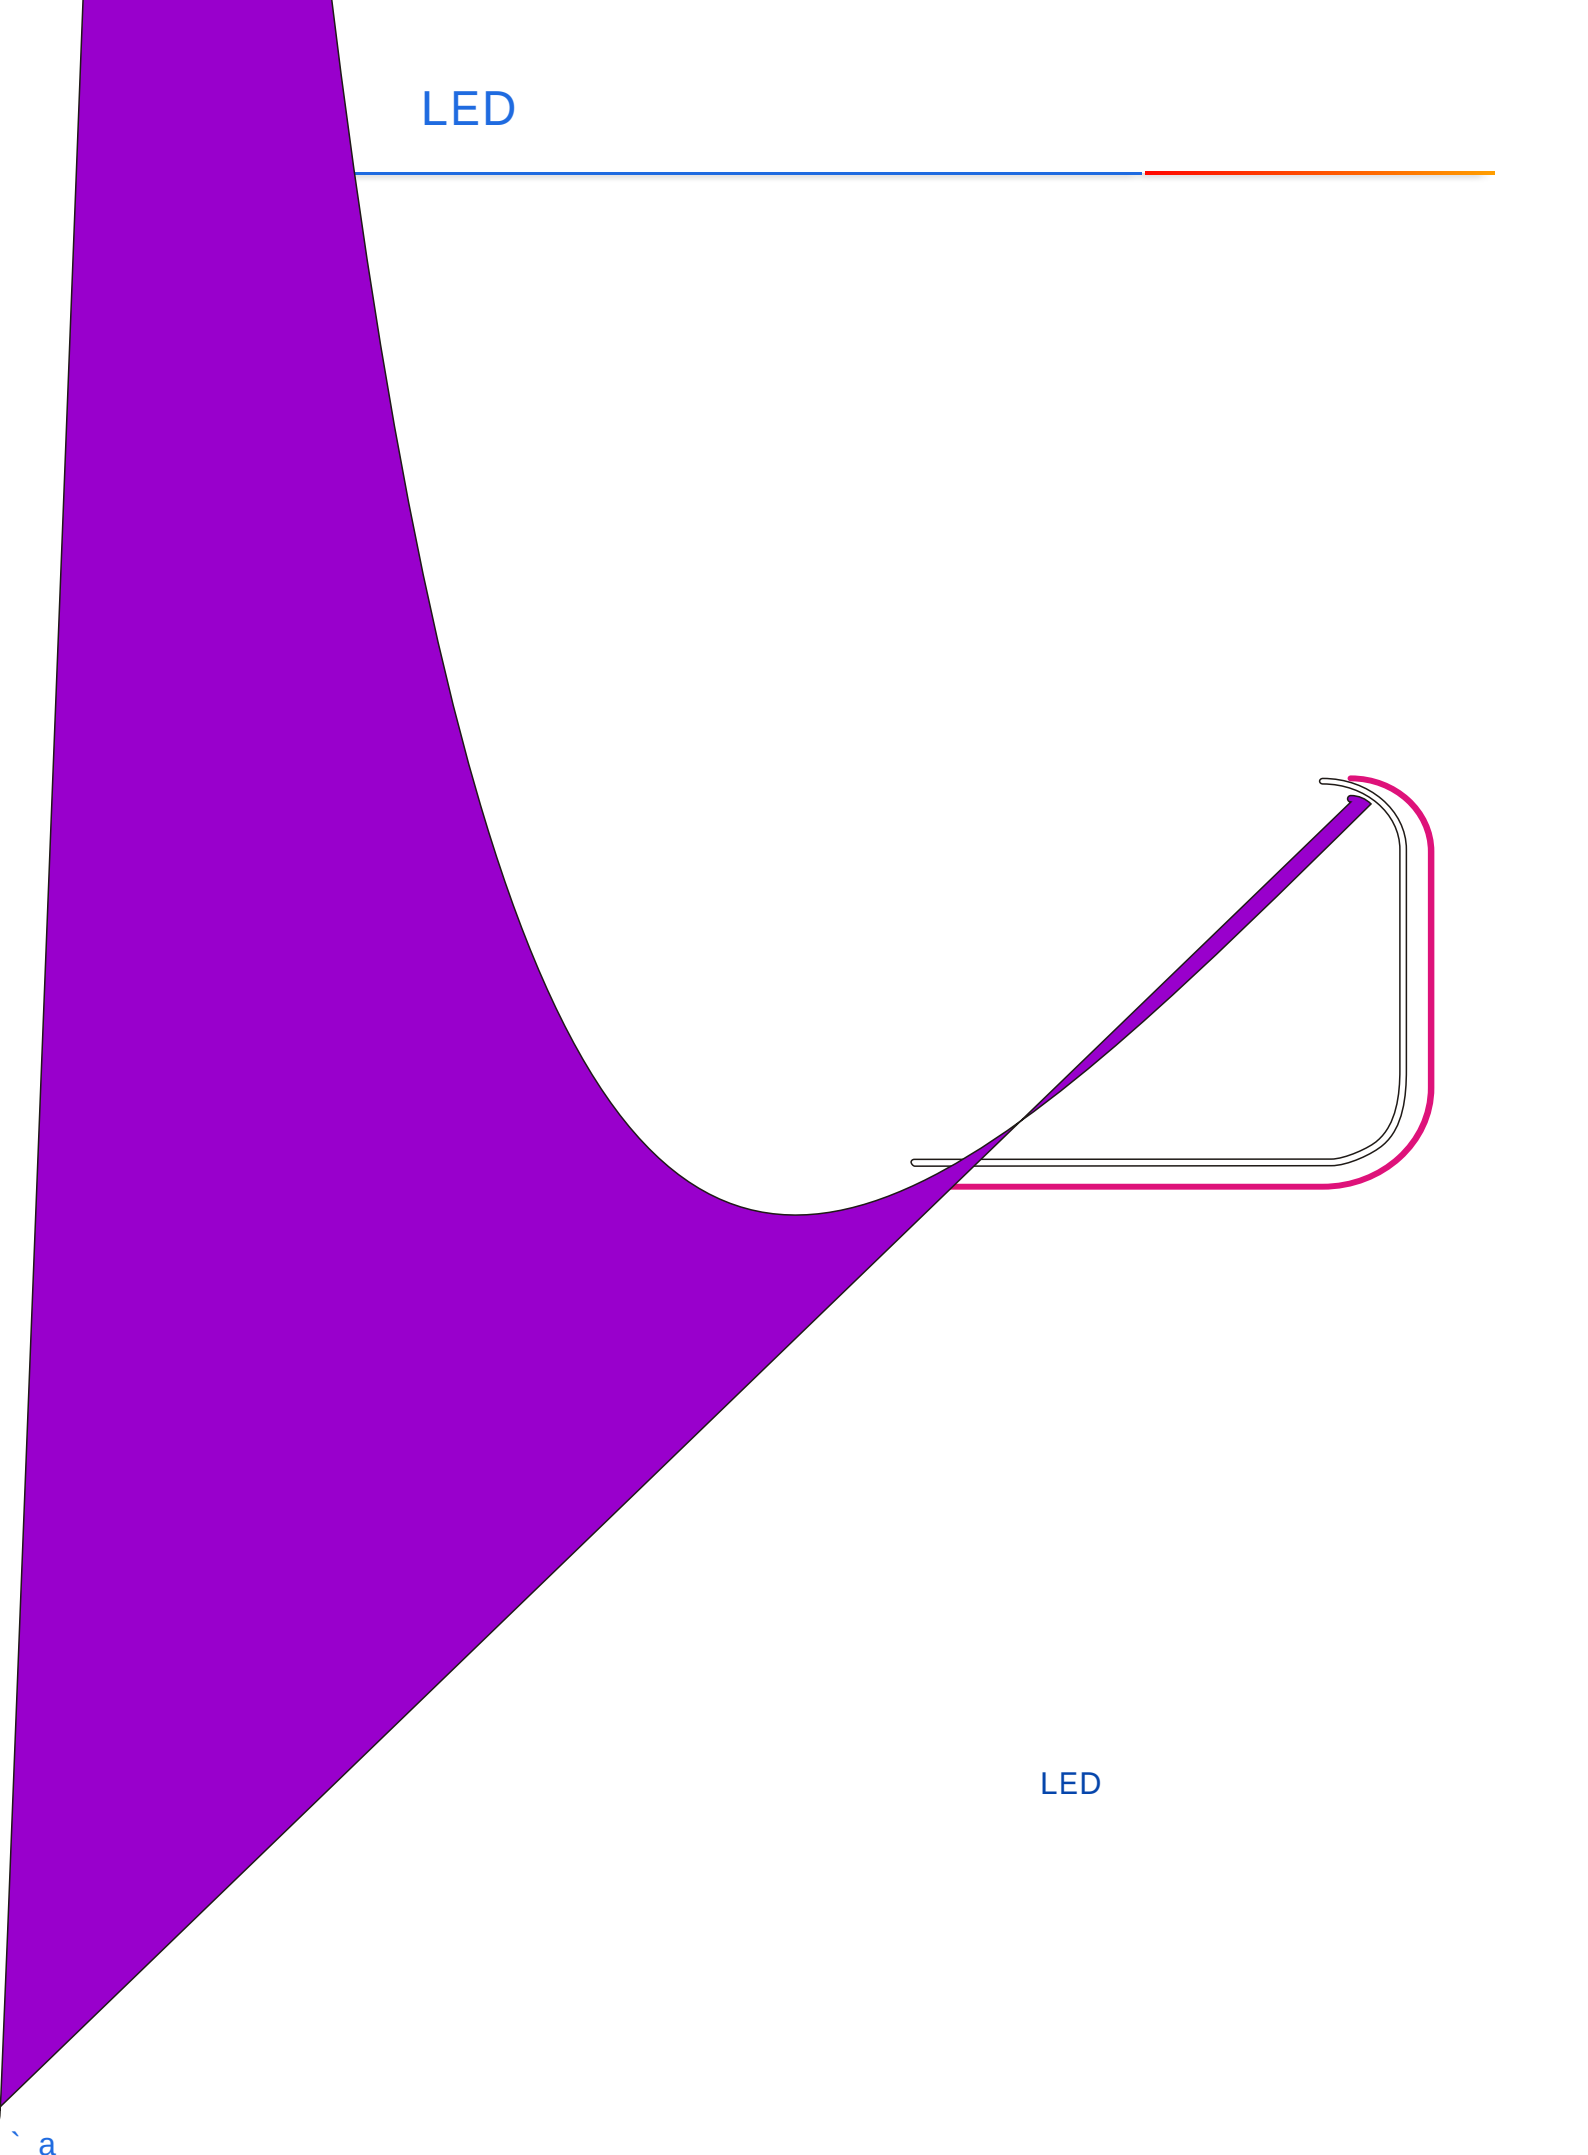

LED





1

- mm × × =493 × 385 × 116;
- 7
- 2kg 15kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

SS-3

LED

2025/12/01

