



崧盛电源  
LED DRIVER

# SOSEN LED Driver, Your Smart Choice

## 规格书

### SS-400VP系列 LED驱动电源

: SS-400VP-XX

: 400W LED

: V05

: 2023-02-01



|    |  |  |  |  |  |  |  |  |
|----|--|--|--|--|--|--|--|--|
| 型号 |  |  |  |  |  |  |  |  |
|----|--|--|--|--|--|--|--|--|





## 输入性能

•

[illegible]

输出性能(SS-400VP-56\*) :

| 参数    | 最小值   | 典型值   | 最大值   | 备注                  |
|-------|-------|-------|-------|---------------------|
|       | 28V   |       | 56V   | 28-48V              |
|       | 48V   |       | 56V   | Po=Vo*Io=400W       |
|       | 7.15A |       | 8.35A | 8.35A 48V,7.15A 56V |
| AOC   | 1.05A |       | 8.35A |                     |
|       |       |       |       |                     |
|       |       |       |       |                     |
|       |       | 91.5% |       | 50V/8A              |
|       |       | 93.5% |       |                     |
|       |       | 94.0% |       |                     |
|       |       |       | 5%    |                     |
| PK-AV |       | 5%    | 10%   |                     |
|       |       |       | 10%   |                     |
|       |       |       | 0.5S  | 120Vac              |
|       |       |       | 0.5S  | 220Vac              |
|       |       |       |       |                     |
| 载     | -2%   |       |       |                     |
|       | 0.12% |       |       |                     |
|       |       |       |       |                     |
|       |       |       |       |                     |
|       |       |       |       |                     |
|       |       |       |       |                     |

SS-400VP      LED

输出性能(SS-400V


| 参数    |         |
|-------|---------|
|       |         |
|       |         |
|       |         |
|       | AO      |
|       |         |
|       | &120Vac |
|       | &220Vac |
|       | &277Va  |
| 500ac | Đ       |
|       |         |
|       |         |

š 0ŵ 0ŵ Δ

其他性能：



|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |




| 参数 | 最小值 | 典型值 | 最大值 | 备注 |
|----|-----|-----|-----|----|
|    |     |     |     |    |
|    |     |     |     |    |
|    |     |     |     |    |
|    |     |     |     |    |

安规测试:


| 安规测试项目 | 技术指标    |          |         | 备注       |
|--------|---------|----------|---------|----------|
|        | UL 绝缘要求 | ENEC绝缘要求 | CCC绝缘要求 |          |
|        | 1600Vac | 3000Vac  | 3750Vac |          |
|        | 1600Vac | 1500Vac  | 1875Vac |          |
|        | 1600Vac | 3000Vac  | 3750Vac |          |
|        | 1600Vac | 1000Vac  | 1000Vac |          |
|        | 1600Vac | 1000Vac  | 1000Vac |          |
|        | 500Vac  | 500Vac   | 500Vac  |          |
|        | ≥10MΩ   |          |         | 500V     |
|        | ≤0.1Ω   |          |         | 25A/1min |
|        | ≤0.75mA |          |         | 277Vac   |

1. EMC
2. LN NTC
- 3.CCC IEC 60598-1:2014 10.2
- EMC

特性曲线(SS-400VP-56\*) :


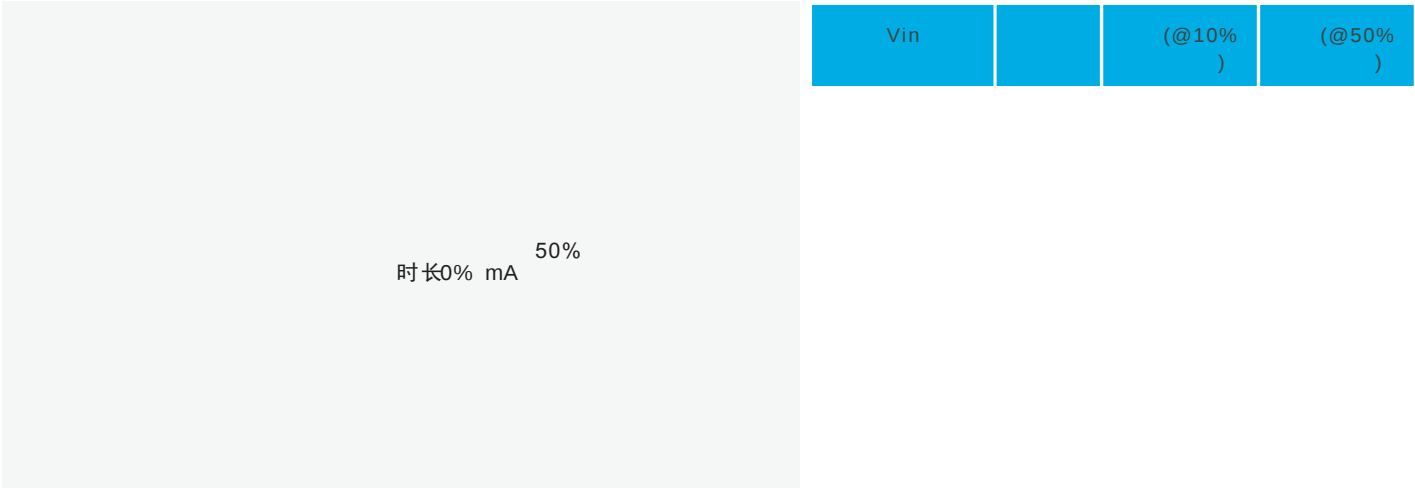


特性曲线：

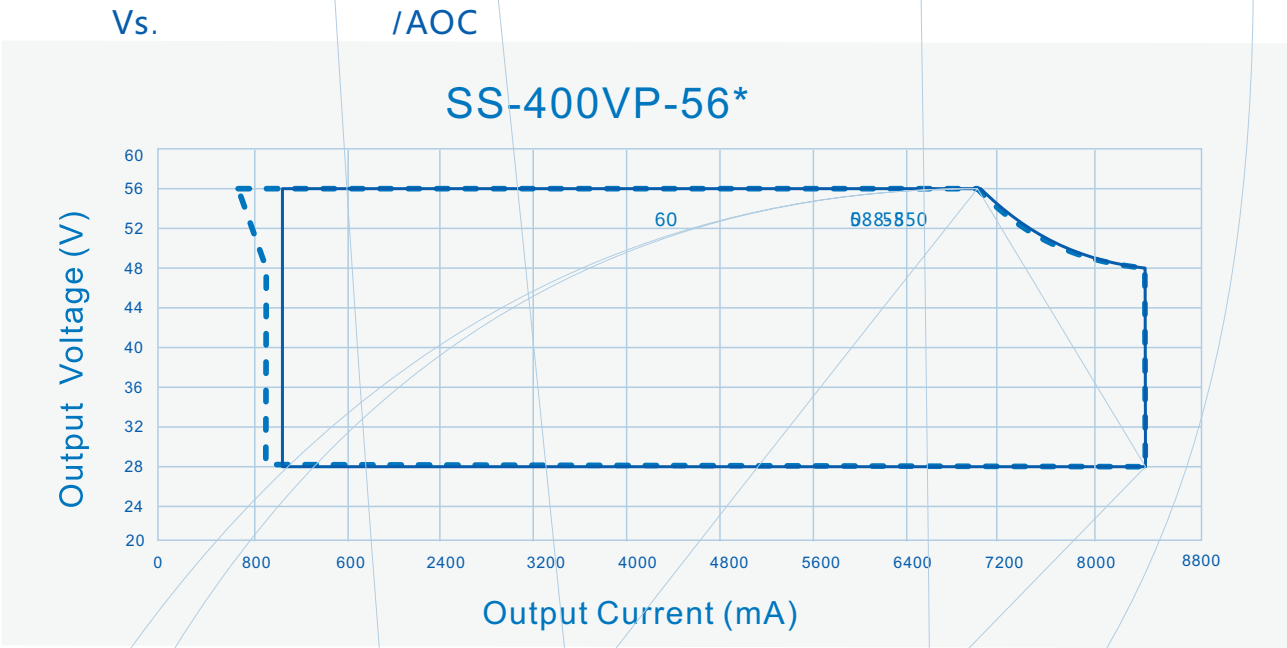

Vs.                      /AOC

特性曲线：

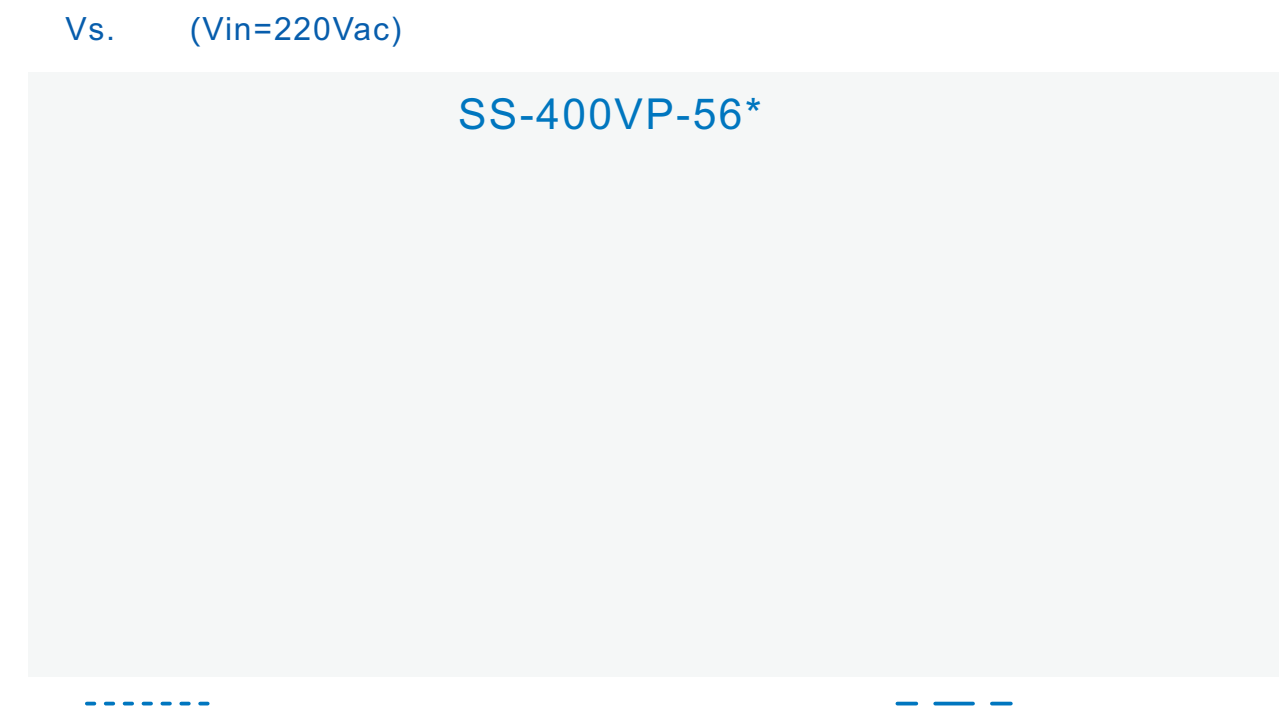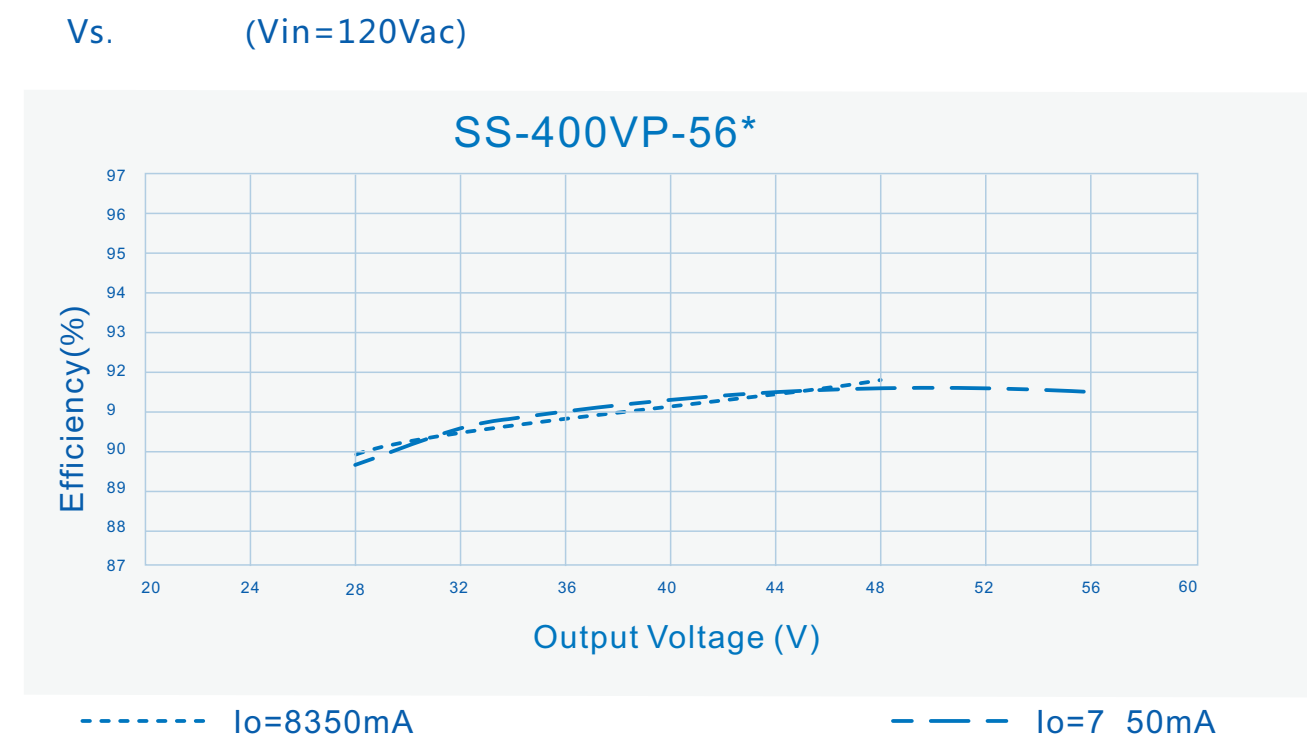

---

特性曲线：

特性曲线：



---

特性曲线：

Vs.

特性曲线：

Vs.



编程连线图：

0

0







注意事项

1

包 装

- mm ) : × × =493×385×116;
- 7
- 1.98kg 14.86kg
- 
- 

运 输

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

贮 存

产品贮存应符合GB 3873 - 83的规定。  
贮存期限超过1年的产品要重新检验，合格后方可使用。



SS-400VP

LED

变更履历表



变更履历表

