

n l

: SS-1000VP-EXX

: 1000W LED

: V00

: 2025-03-20



SS-1000VP-E LED

“ * ”

5 V 5 3


“ * ”	DALI (:D)	AUX 12V (:H)	NTC (:N)
BH		✓	

0 # X	
✓	

--	--	--	--	--

	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			12A	120Vac
			1200W	120Vac
			60A	冷机启动
			80A V	Q· ac/RS+TR“Dd` rf† d` ua VGBDs.

230Vac/50Hz
120-277Vac/50Hz 70%-100%
230Vac/50Hz
120-277Vac/50Hz 70%-100%

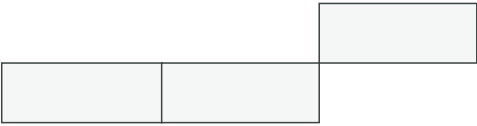

			Io	
--	--	--	----	--

0V		0V		12V	
		10%Io set		100%Io set	
		0V		10V	
		9.8V		10.2V	
		0V		0.3V	
		1KHz		2KHz	
		0%			

		0.7V			
		0.8V			



--	--	--	--	--


Tcase				

:

--	--

	UL	ENEC	
	2U+1000Vac	4U+2000Vac	
	2U+1000Vac	2U+1000Vac	
	2U+1000Vac	4U+2000Vac	
	500Vac	500Vac	
	500Vac	500Vac	
	500Vac	500Vac	
	≥ 10MΩ		500Vdc
	≤ 0.1Ω		25A/1min
	≤ 0.75mA		277Vac

1. EMC
2. LN
- EMC

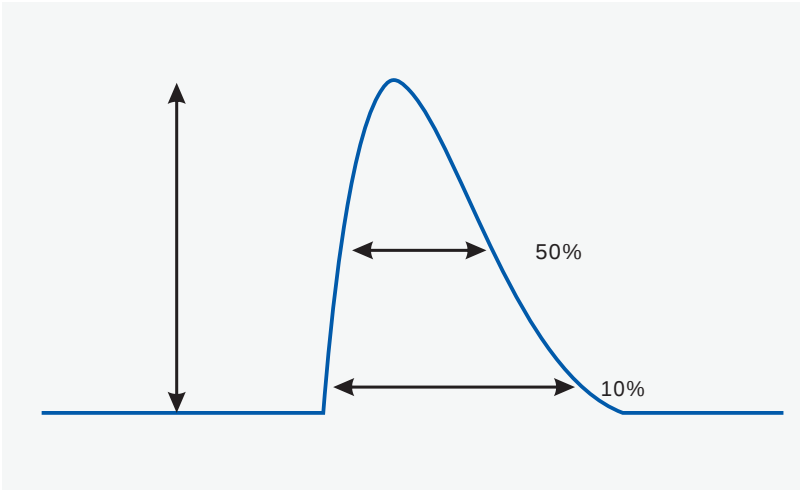

Vin		(@10%)	(@50%)
120Vac	60A	3500uS	
230Vac	80A		1500uS
277Vac	110A	3300uS	

SS-1000VP-E56*

Vs.

/AOC

--

—


Vs.



SS-LED

SS-1000VP-E56*

Vs.

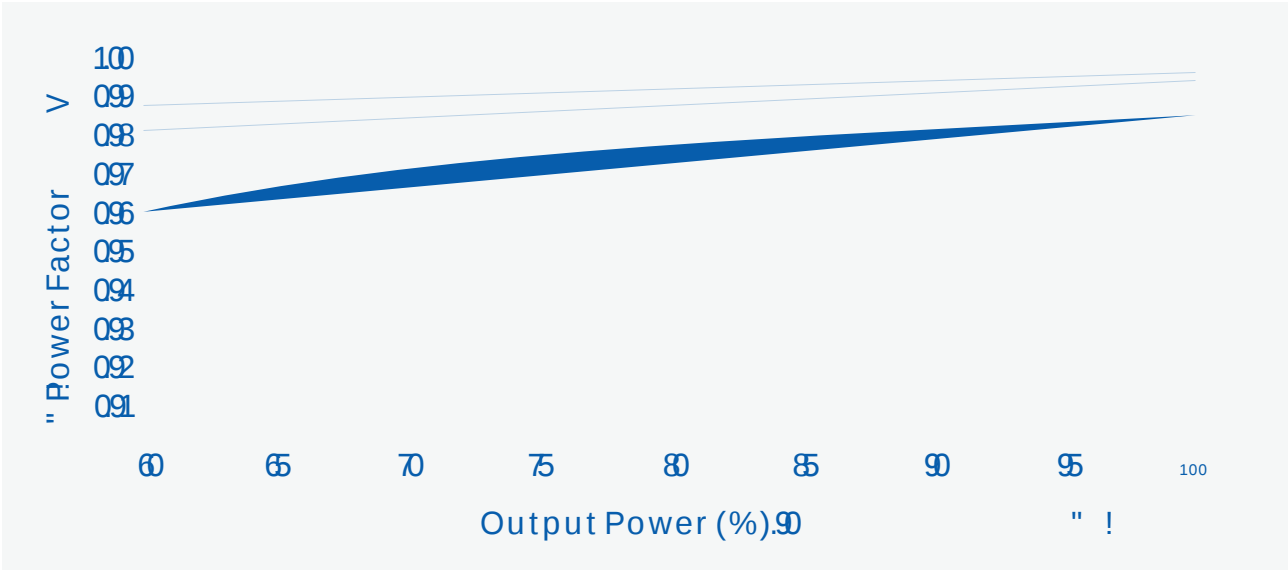

Vin=120Vac

Vin=230Vac

(%)0

Vs.




Vin=120Vac

Vin=230Vac


SS-1000VP-E56*

输入

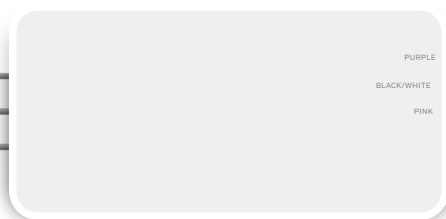

PURPLE
BLACK/WHITE
PINK


输出

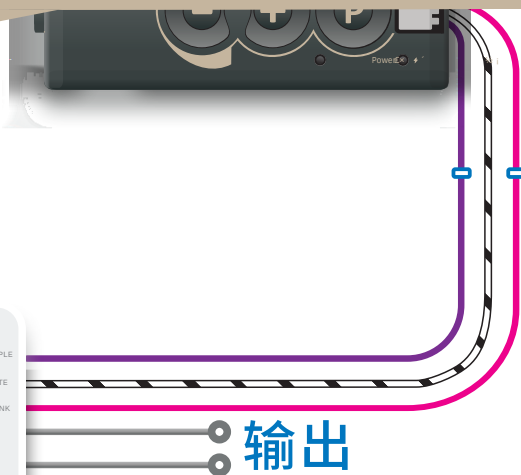

--	--	--	--

	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	(
			(

“ 10V() ” / “ 0V ”

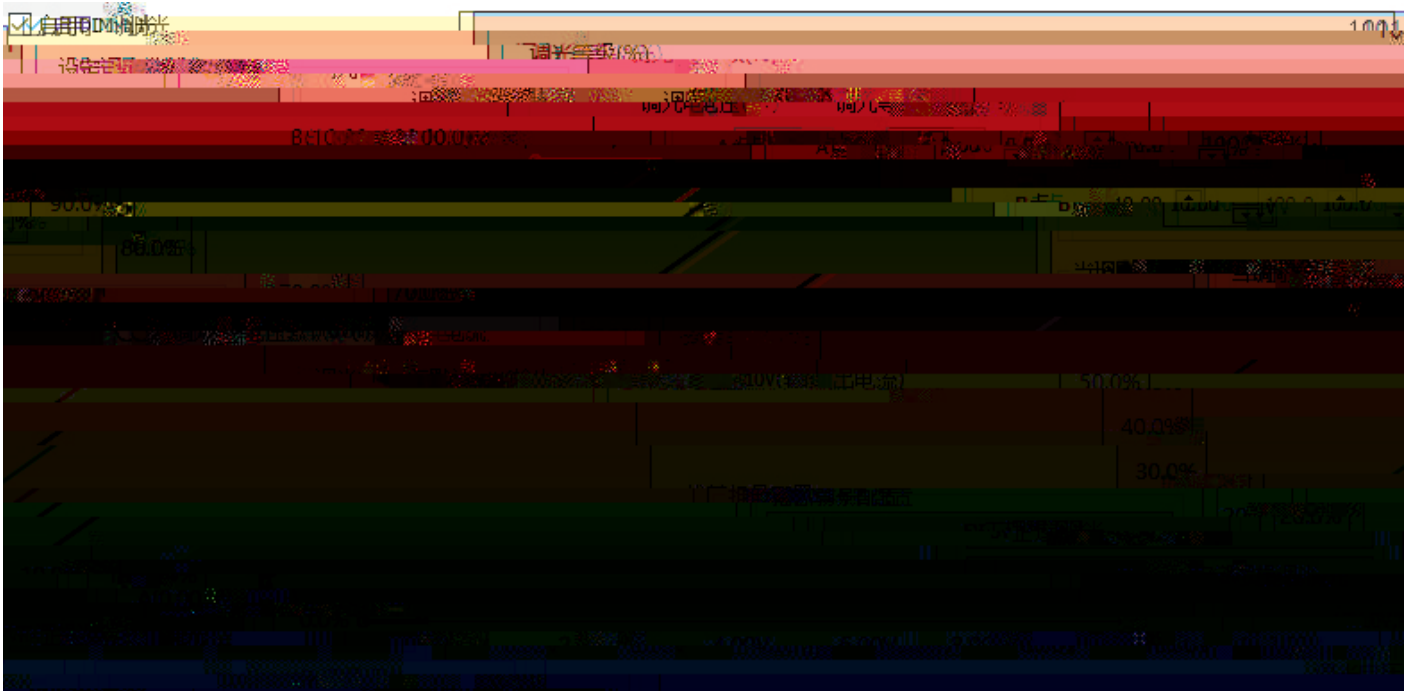

AC (450±10mm)
8.0mm



- mm × × =577 × 385 × 162;
- 5
- 3.70kg 20kg
-

GB 3873 83



V00	2025/03/20