



EP-M54BH LED

	120Vac		347Vac	
	108Vac		380Vac	
	47Hz	50	63Hz	
			1.1A	120Vac
			110W	120Vac
(120Vac)			80A	
(277Vac)			140A	
(347Vac)			160A	
			3W	347Vac/60
	0.92	0		347Vac/60
	0.90			120-347V
			10%	347Vac/60
			20%	120-347V



SS-100EP-M54BH LED


--	--	--	--	--

Tcase	-40	25	+90	
CIE	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


EMI/EMS	/
---------	---

9A	FCC Part15: Subpart A ANSI 63.4:2014	
	FCC Part15: Subpart A ANSI 63.4:2014	
	IEC/EN 61000-3-2	


SS-100EP-M54BH LED

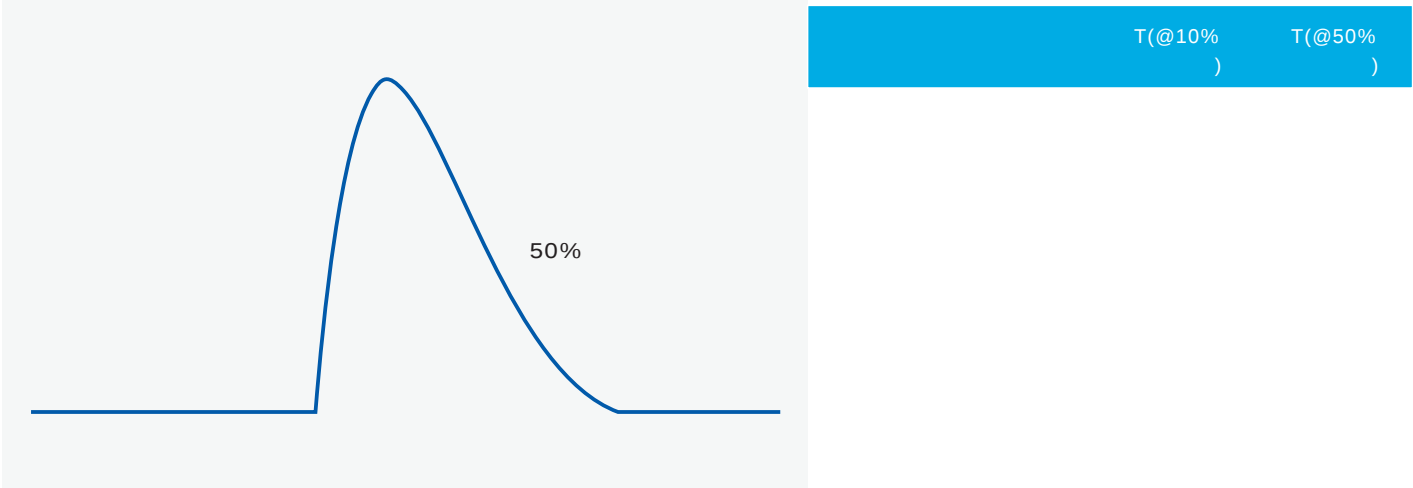

SS-100EP-M54BH LED

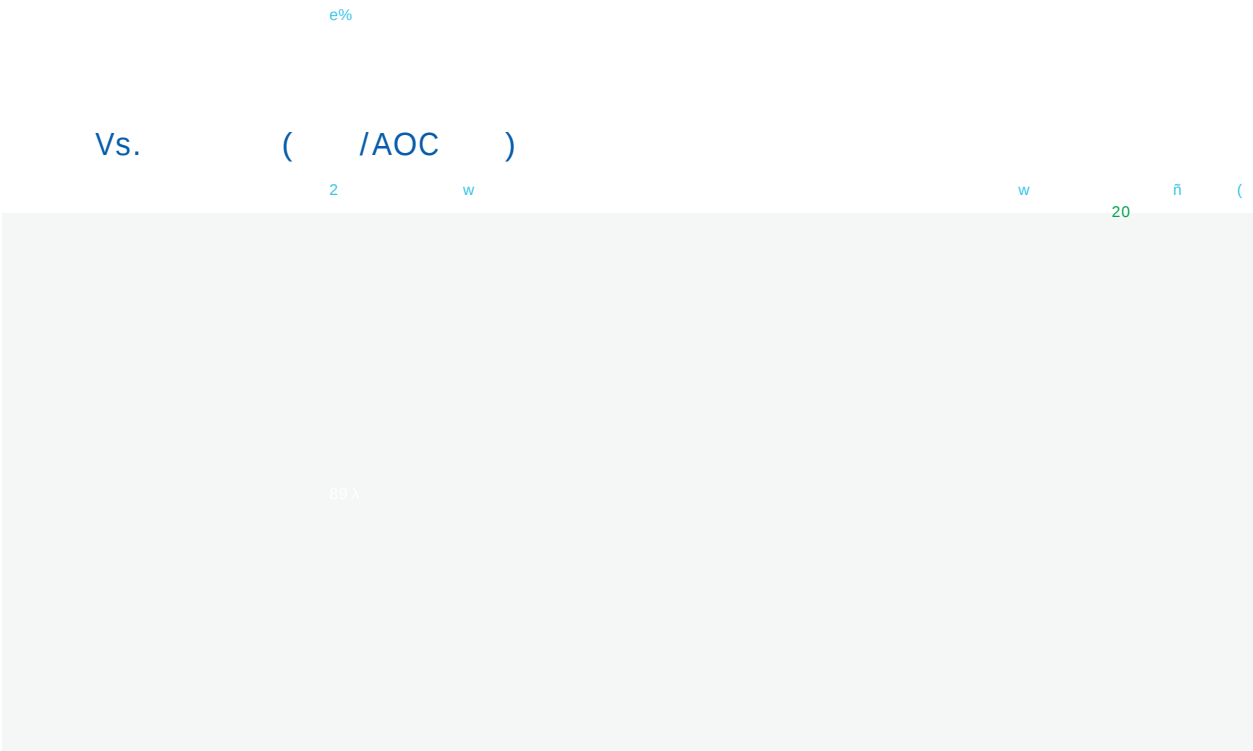


----- Dimming Window ——— AOC Window

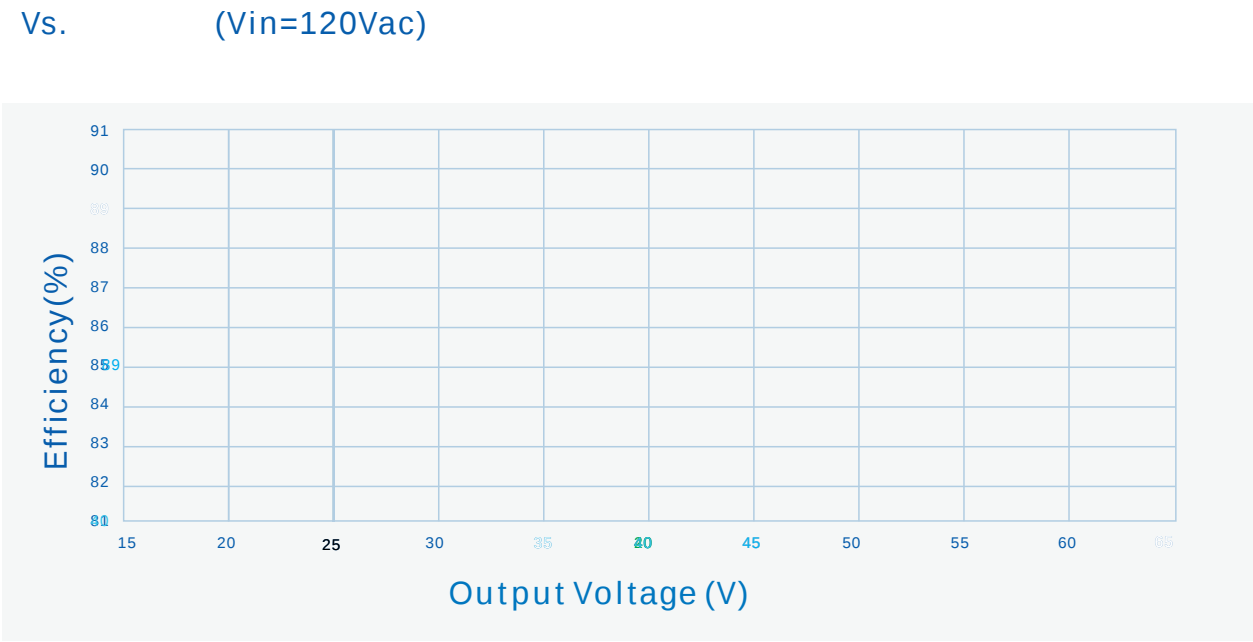

SS-100EP-M54BH LED

Vs. (Vin=277Vac)

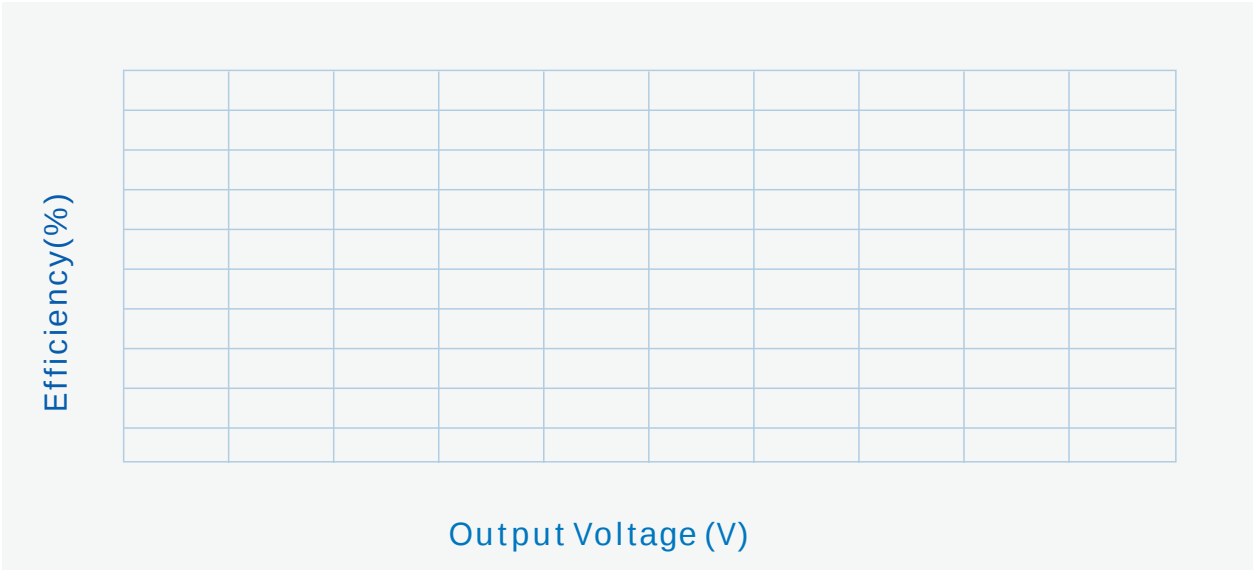


----- Io=2750mA

- . - . Io=1770mA

Vs. (Vin=347Vac)

SS-100EP-M54BH LED

Vs.

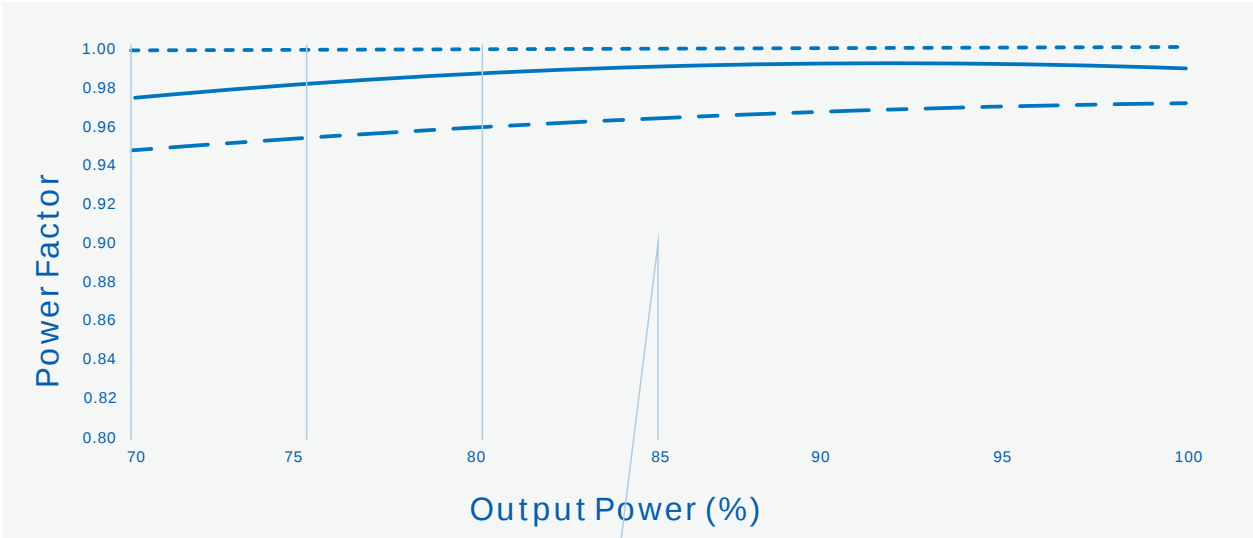

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac


Vs.

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac

SS-100EP-M54BH LED


Vs.

Vs.

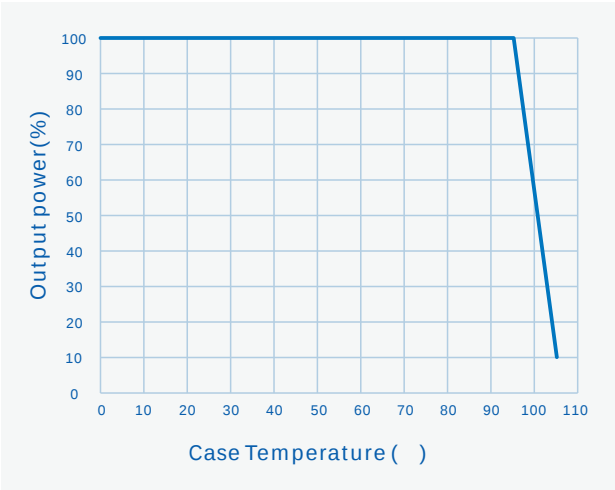

Vs.

Vs.

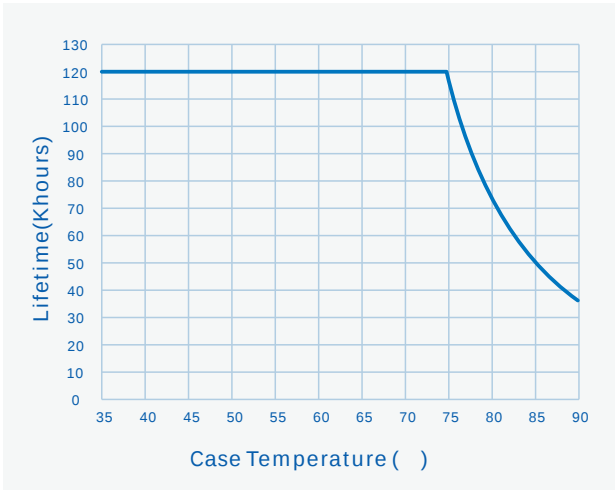

SS-100EP-M54BH LED

1 LED ;
2 AC DC DIM / / :

- mm × × =495 × 385 × 162;
- 24
- 0.56kg15kg
-

GB 3873 83

SS-100EP-M54BH LED



V00		2024/07/17	