



	28V			
	48V			
	2			

--	--	--	--	--

0-10V		11.4V	12V	13.8V	
		0mA	200mA		
		0V		12V	DIM+/DIM- DIM+ 110uA
		10%loset		100%loset	
		0V		10V	
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 110uA
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	
		10%		100%	DIM+ 110uA

MTBF	202,300 hours	230Vac, , 25 (MIL-HDBK-217F)
	IP67	
	90	

x x

	3750g	

1,
 25
 LED
 N,


2,
 0-100%
 ,
 :91KΩ/N.

--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

EMI/EMS	/	
---------	---	--

	IEC/EN 61000-3-2	Class C
	IEC/EN 61000-4-12	B 6kV 6kV

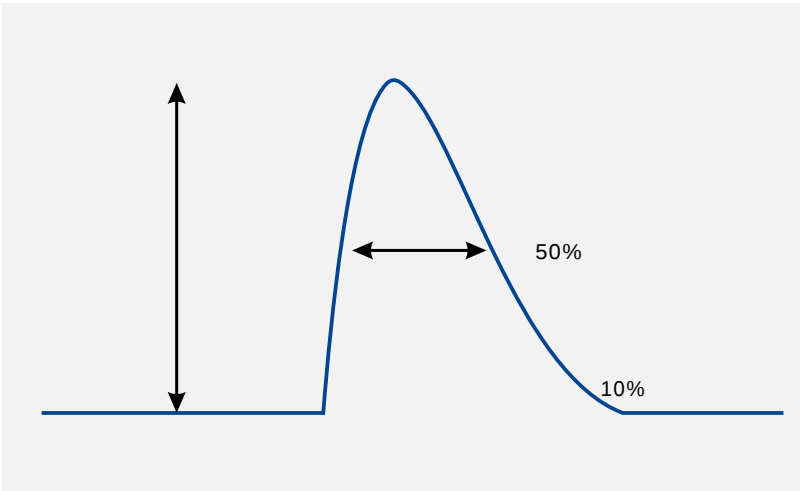

V _{in}		(@10%)	(@50%)
-----------------	--	------------	------------

Vs.

/AOC


£

ğ

c


-

Vs. (Vin=230Vac)

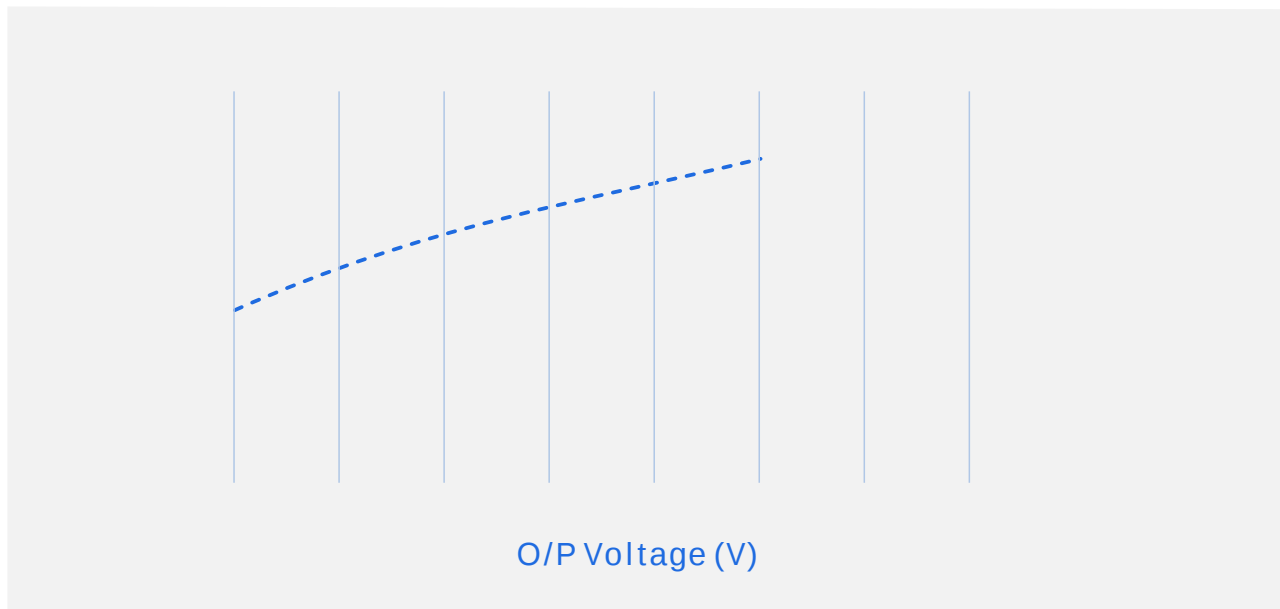


(SS-1200VP-GL56*)

Vs.

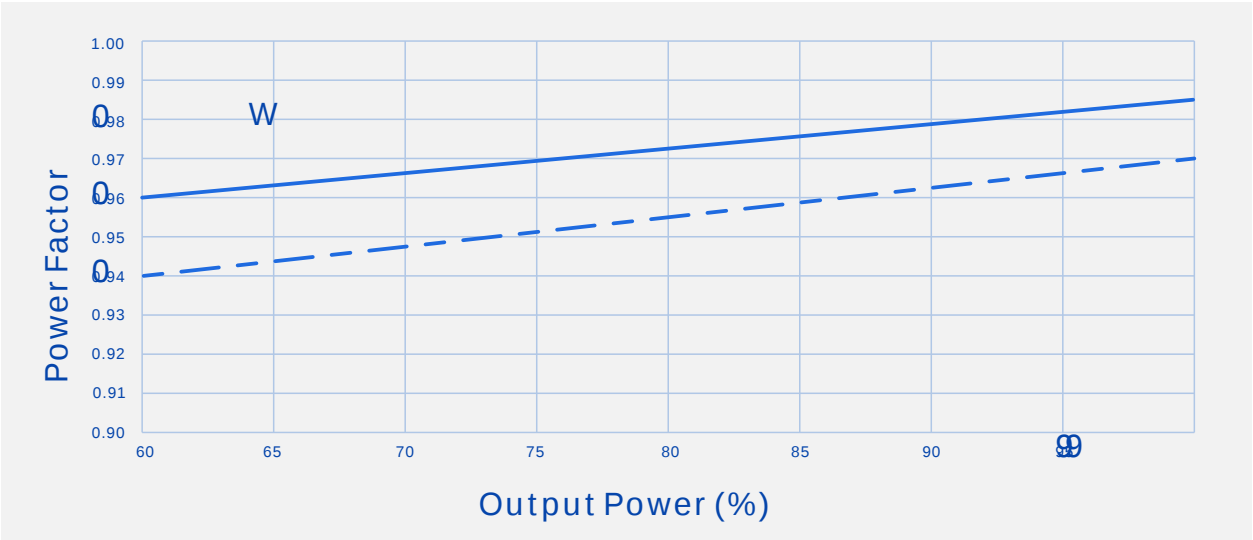

Vs.

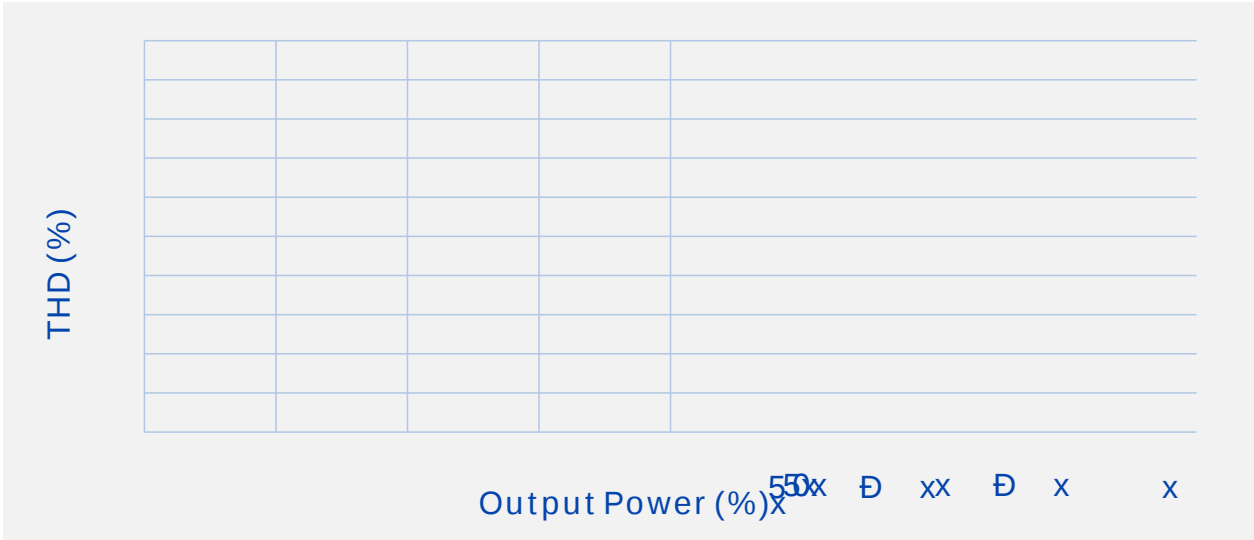

(SS-1200VP-GL56*)

Vs. ()

Vs.

Vs.

Vs.



1
2
3 PC




LED


LED

--	--	--	--

	(0-10V)	10V()	
	(0-10V)	0V()	DIMOFF ()

- 1, “ 10V() ” / “ 0V ”
- 2, ()

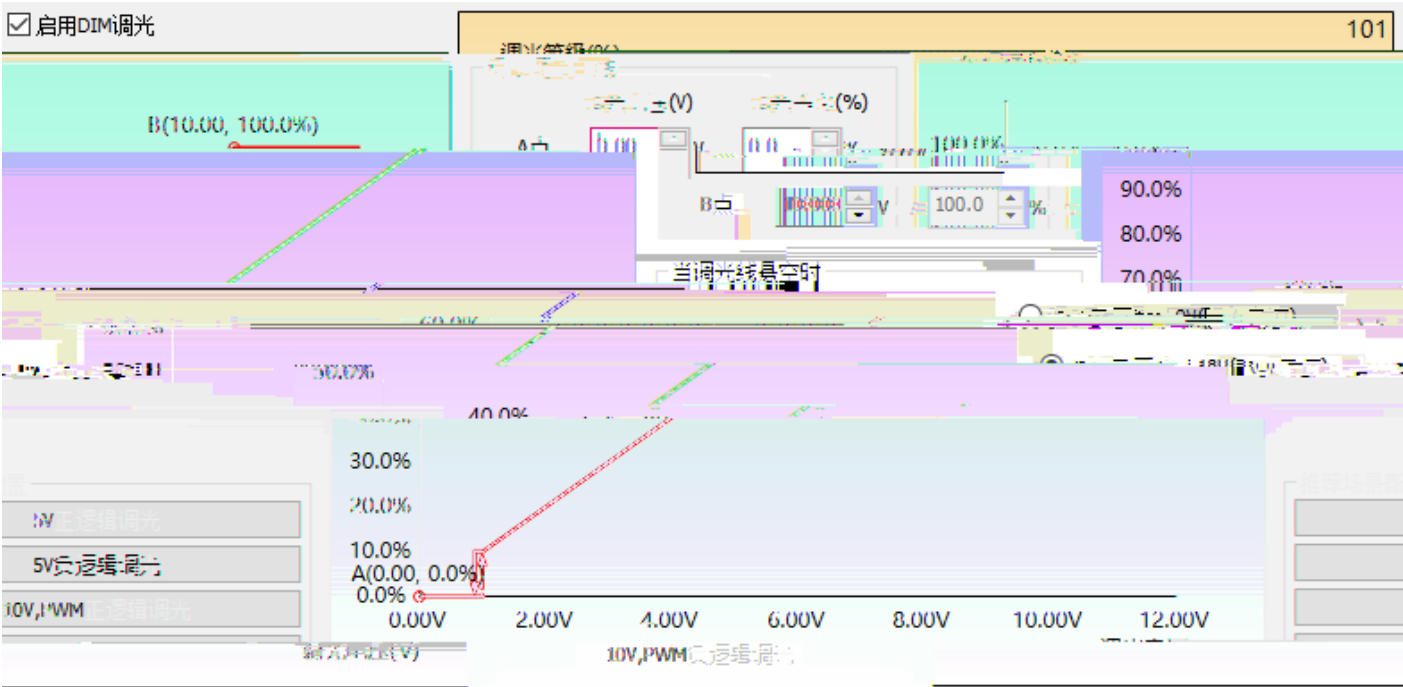

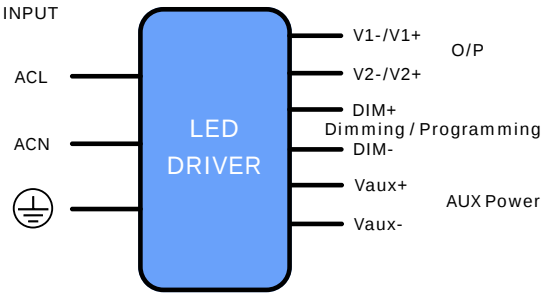

AC	(	450 ± 10mm)					
SJOW	3*17AWG,	8.0mm	L	N			⊕
SJTW	3*16AWG	8.5mm	L	N			⊕
DC	(	250 ± 10mm)					
SJOW	4*14AWG	8.8mm	V+	V-			
SJTW	4*14AWG	9.0mm	V+	V-			
BH							
DIM	/	/	(	* M ?			H



1

- mm × × =577 × 385 × 162;
- 5
- 3.75kg 20kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU



