

0-10V

0V

10V

DIM+/DIM-
DIM+ 110uA

DIM+ 40uA
DIM+/DIM -
5-0V

DIM+ 110uA

DIM+/DIM-

DIM+ 110uA

80%

230Vac, , 25 (MIL-HDBK-217F)

75


X X

1	2	3	4	5
---	---	---	---	---

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

EMI/EMS	/	
---------	---	--

	IEC/EN 61000-3-2	Class C
	IEC/EN 61000-4-5	
1 & 2	NS-IEC8177-24-7	B 6kV 6kV
	C 6kV	B 6kV 6kV



Vin		(@10%)	(@50%)
-----	--	------------	------------

Vs.

/AOC

Vs. (Vin=230Vac)


----- Io=25000mA

- - - Io=21400mA

Vs. (Vin=

(SS-1200VP-GL56BH*)

Vs.

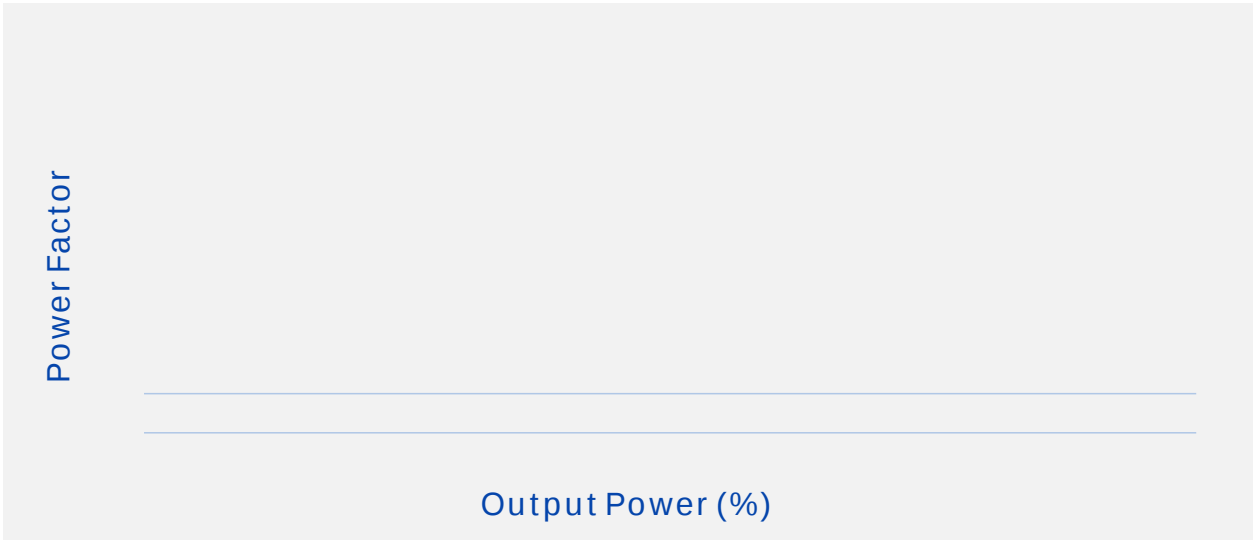


Vs.

(SS-1200VP-GL56BH*)

Vs. ()

Vs.

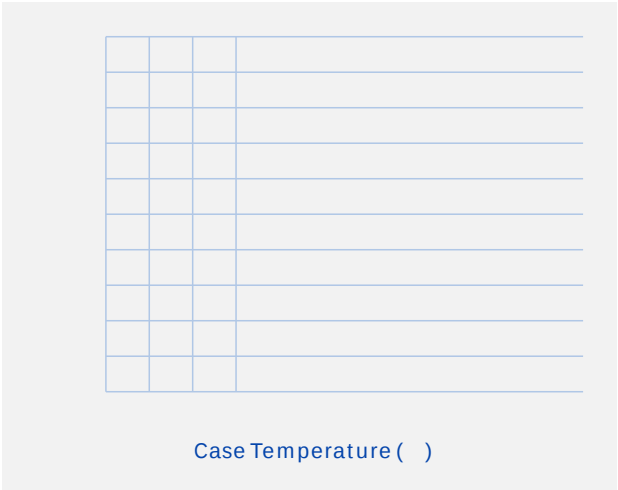


Vs.

Vs.

1
2
3 PC


LED


LED

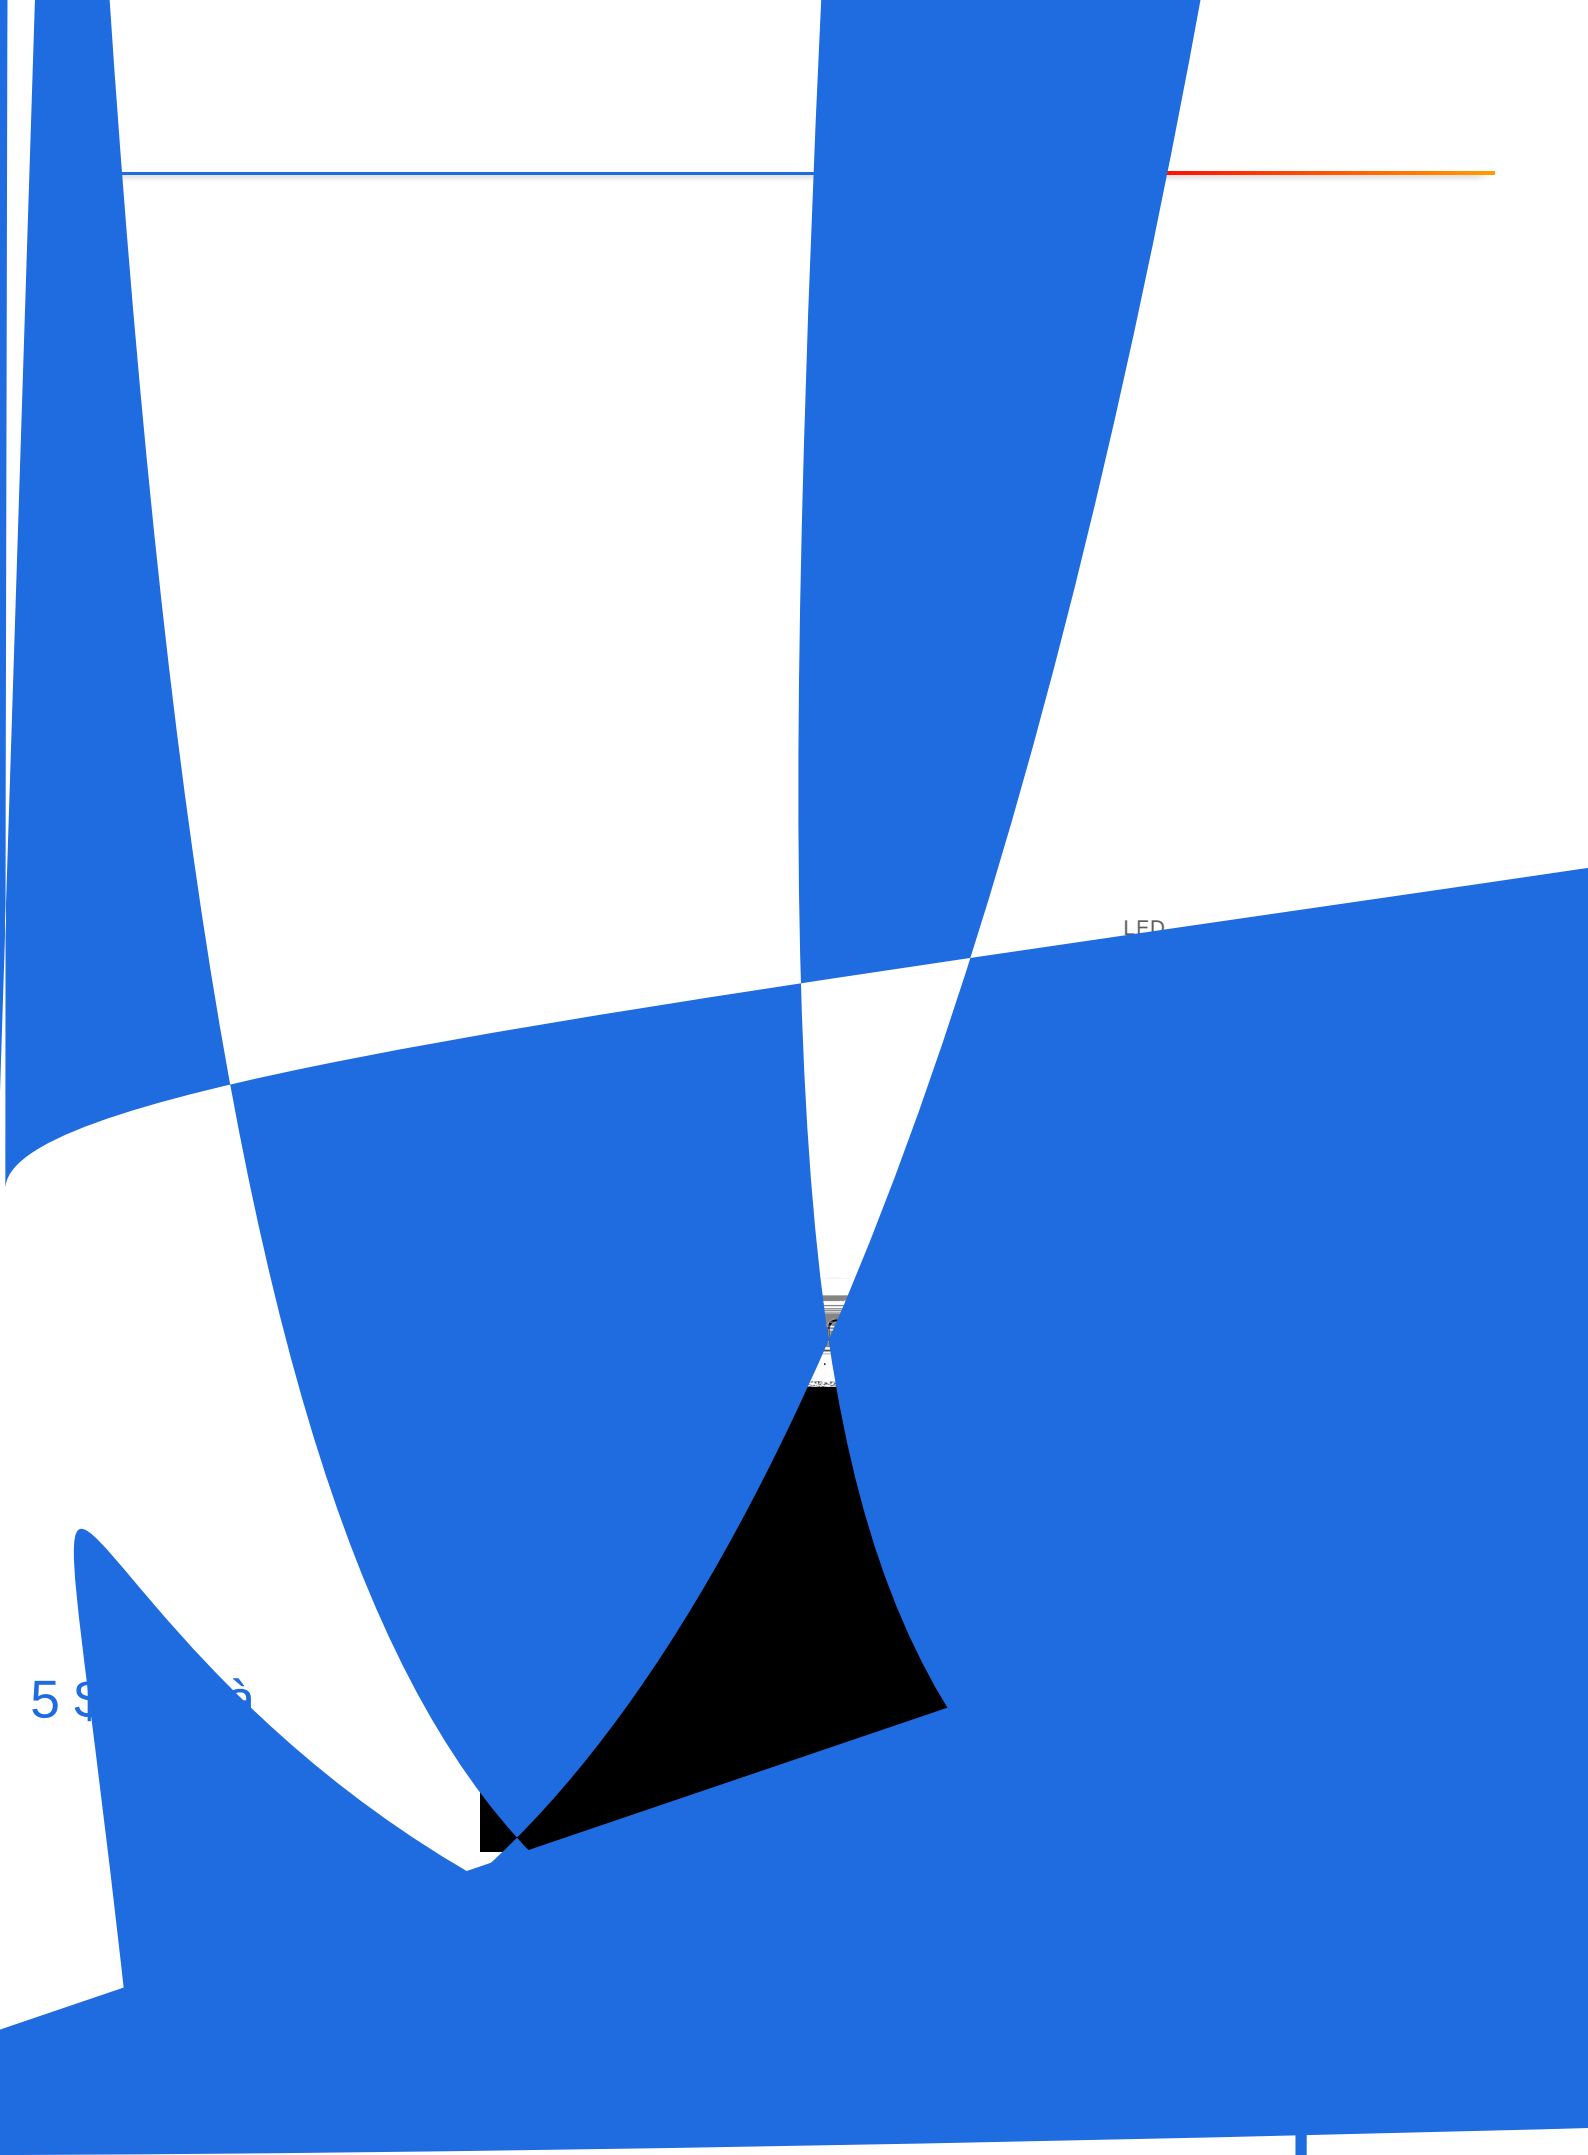

LED

59 5







1

- mm × × =577 × 385 × 162;
- 5

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

