



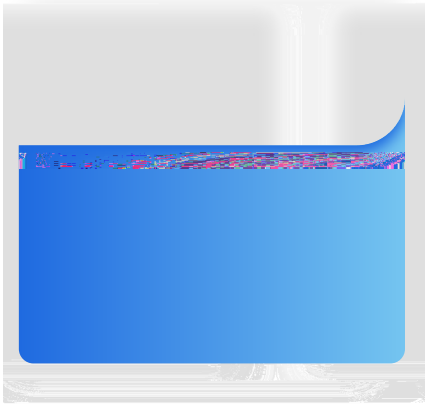

- 95%
- 0-10V PWM
- 12V/0.2A
-
- / /
- IP65
- 6kV/ 6kV



				120Vac


--

220Vac/50Hz
220Vac/50Hz
120-277Vac/50Hz 70-100%
0 F 0-27 -/ 0
120-277Vac/50Hz 70-100%

BHD +

120W(A)-100W(B)-80W(C)
100W(A)-80W(B)-60W(C)()
CW NW WW

BHB

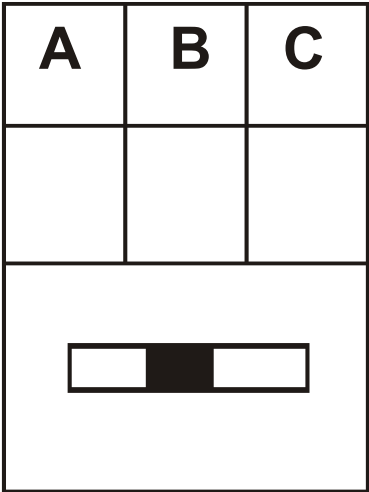

120W(A)-100W(B)-80W(C)
100W(A)-80W(B)-60W(C)()
CW NW WW

SS-120CNL-E260*(62)



LED

	180V		260V	
	200V		260V	Po=Vo*Io=120W
	0.46A		0.6A	0.6A 200V,0.46A 260V

			310V	

SS-120CNL-E260*(62)

LED

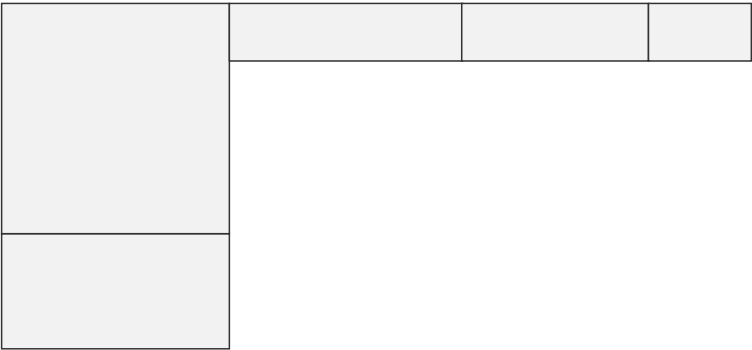

	≤ 85	≥ 50,000 hours	80% ,220Vac
MTBF		200,000 hours	220Vac, , 25 (MIL-HDBK-217F)
		IP65	
		90	
		5	
		760g	
		Φ128mm*62.5mm	x

Tcase	-40		+90	
	-40			
	10%RH			
	5%RH			
	-65m			




T(@10%)	T(@50%)
-------------	-------------



Vs. (Vin=220Vac)

Vs. (Vin=277Vac)

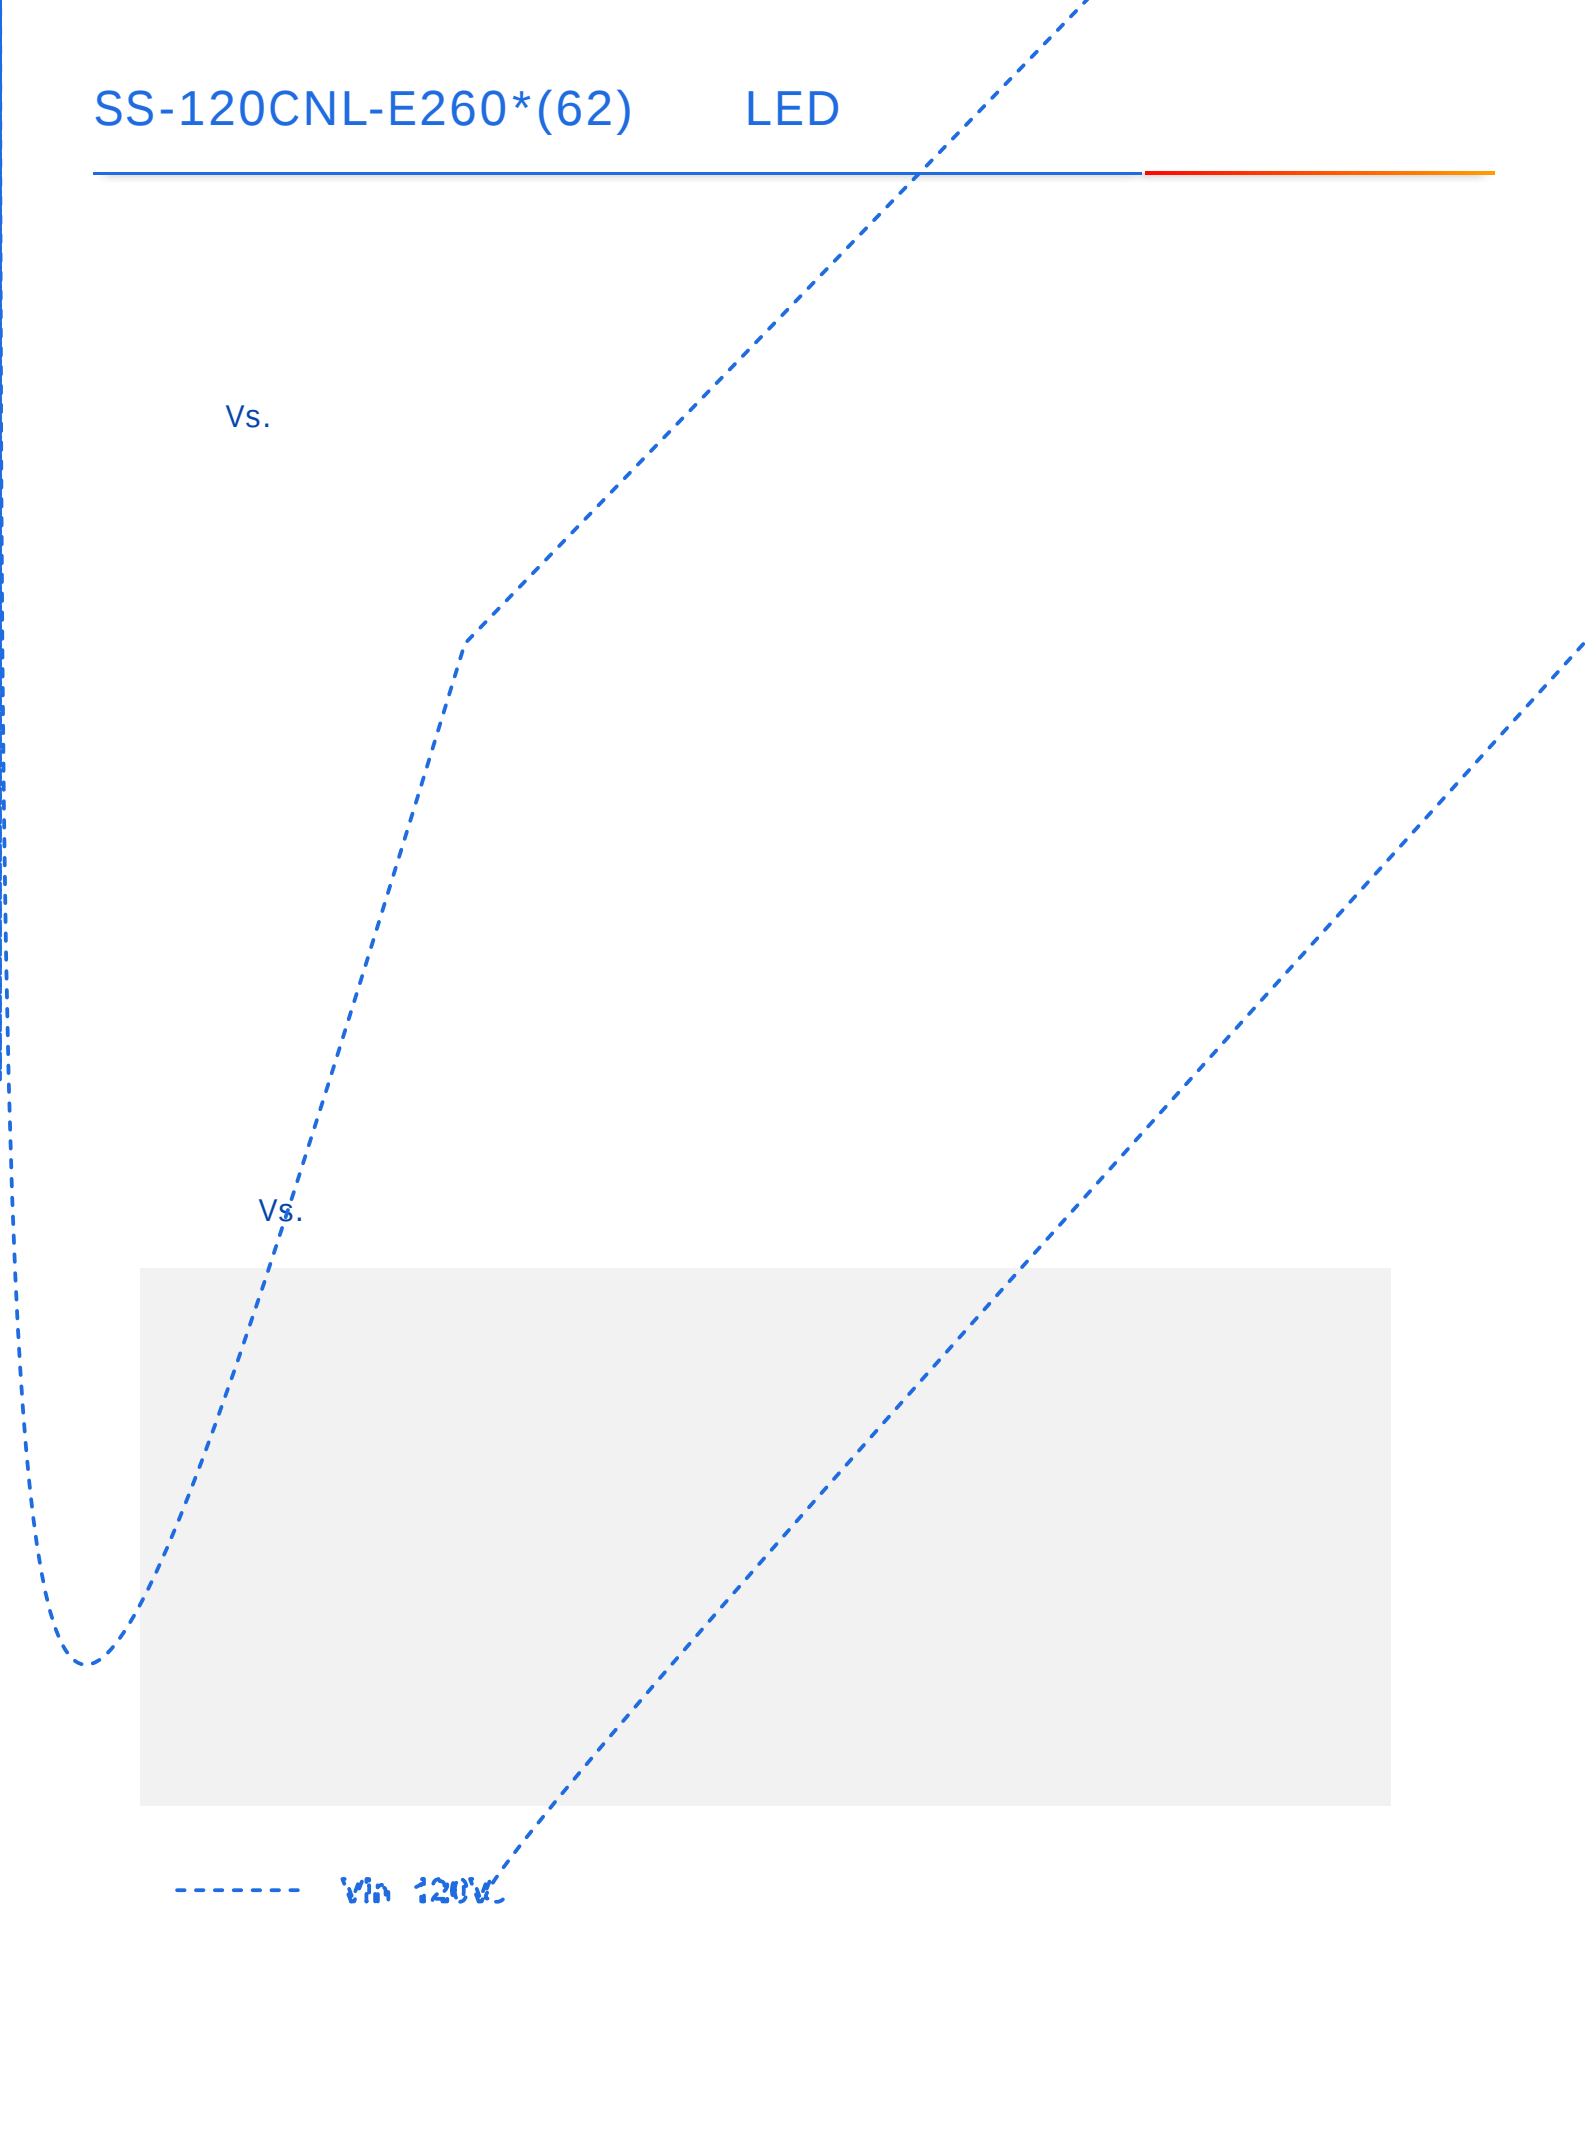


Vs.

Vs.

Vs.

Vs.

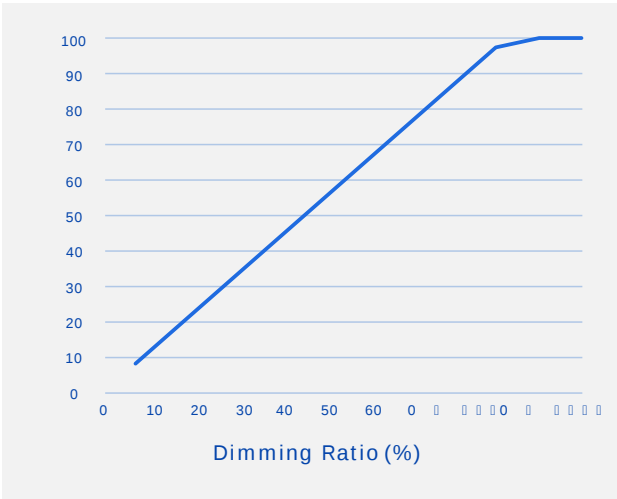

SS-120CNL-E260*(62)

LED

		mm(In.)
	4-B	Φ7.0(0.28)
	D	Φ128(5.04)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	Y	32(1.26)

1

2

AC

DC

43±5mm

LED


DIM

/

/

:

10±2mm;



CNL

3
4
5
6
7
8

LED
LED

- × 385 × 162;
- 5
- kg
-

GB 3833

1


RoHS

(U)

2015/863/EC

/14

235



V00

2023/06/15

le