


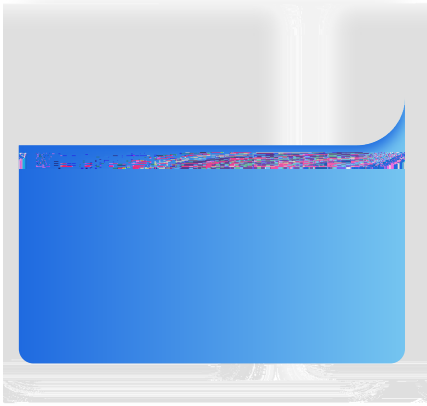

SS-150CNL-E260*(62)

LED

“ * ”

" "	DALI (:D)	AUX 12V (:H)	Q12 /PW 0-10V/PWM/Resistor	M& sis	t
BHB					

--	--	--	--	--

	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			1.5A	120Vac
			180W	120Vac
(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			120-277Vac/50Hz 70-100%
		8%	12%	220Vac/50Hz
			20%	120-277Vac/50Hz 70-100%

BHD

+

BHB

150W(A)-120W(B)-80W(C)

150W(A)-100W(B)-80W(C)()

CW NW WW


150W(A)-120W(B)-80W(C)

150W(A)-100W(B)-80W(C)()

CW NW WW

SS-150CNL-E260*(62)

LED



	180V		260V	
	200V		260V	Po=Vo*Io=150W
	0.57A		0.75A	0.75A 200V,0.57A 260V

			310V	





--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	/	
---------	---	--


	FCC Part 15 Subpart B; ANSI C63.4:2014	120Vac: Class B, 277Vac: Class A
	FCC Part 15 Subpart B; ANSI C63.4:2014	120Vac: Class B, 277Vac: Class A
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B (6kV/12Ω, 6kV/2Ω)
	IEC/EN 61000-4-12	B(4kV, 4kV)

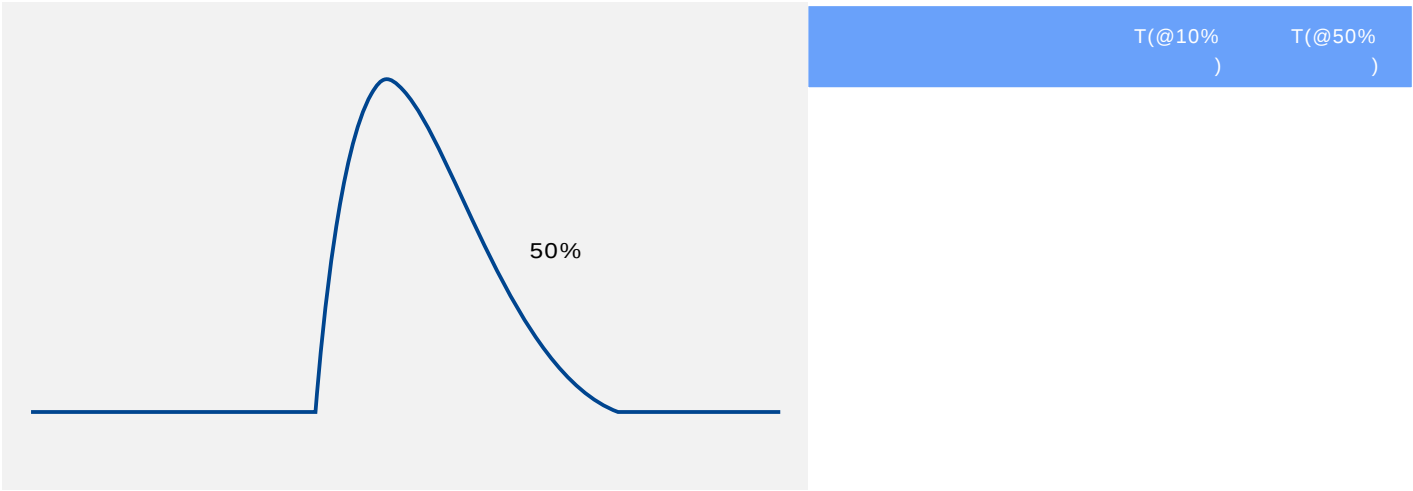

~~Vs. (Vin=120Vac)~~




Vs. (Vin=220Vac)

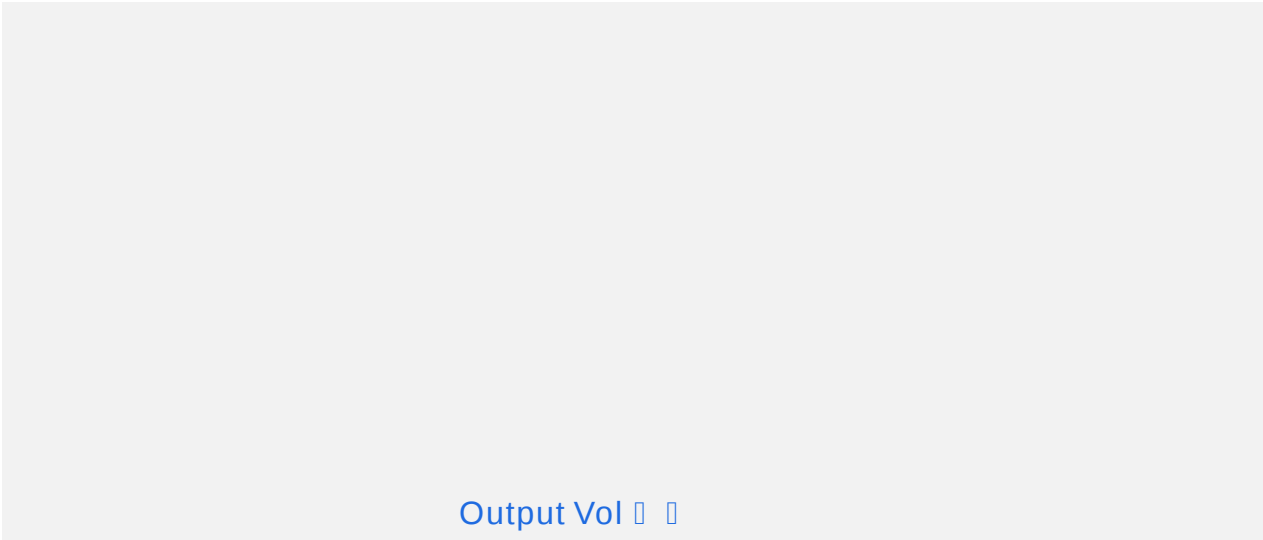


Vs. (Vin=277Vac)

Vs.

Vs.



Vs.

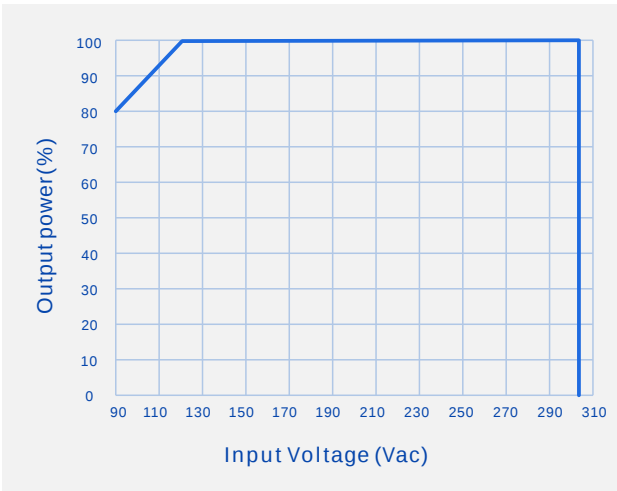


Vs.

Vs.



Vs.

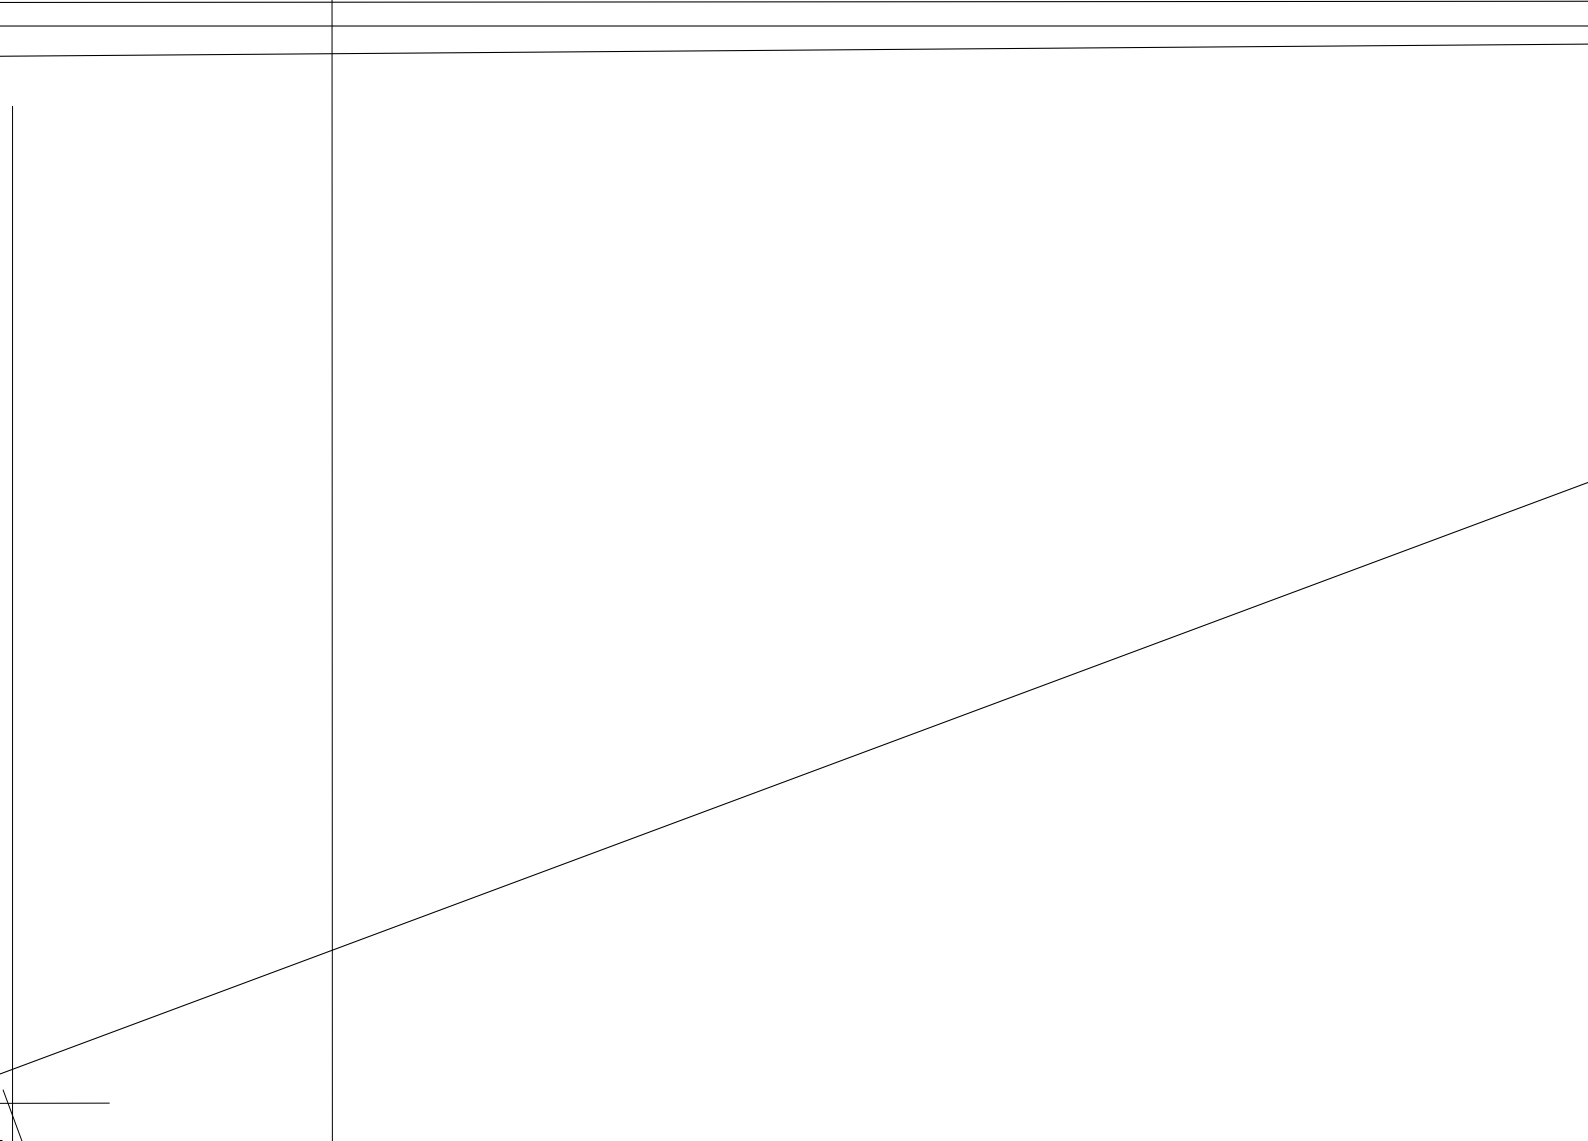

m

- mm × × =577 × 385 × 162;
- 15
- 0.76kg 13kg
-

GB 3873 83

