


: SS-200CNL-E260*

: 200W LED

: V01

: 2025-08-07



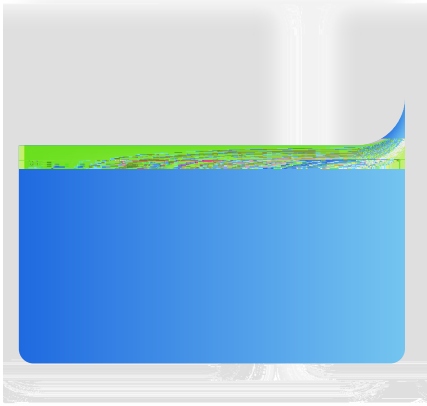

SS-200CNL-E(62)

LED

“ * ”


“ * ”	DALI (:D)	AUX 12V (:H)	0-10V/PWM/Resistor	1-10V/PWM /Resistor (:B)	
B					

--	--	--	--	--

	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			2.0A	
			240V	
(120Vac)				
(220Vac)				
(277Vac)				
	0.95			
	0.9			

Ť ě

SS-200CN



V

F

SS-200CNL-E(62)

LED

--	--	--	--	--

0-10V		0V	12V	
		10%I _F	100%I _o set	
		0V	10V	
PWM	PWM	9.8	10.2V	
	PWM	0	0.3V	
	PWM		Hz	
	PWM			

	≤ 85	80%
	M	220Vac, , 25 (MIL-HDBK-217F)
		: 85
	128mm*62.5mm	x

FD


Tcase	-40			
	-40			
	1			

SS-200CNL-E(62)

--	--

	UL
	1600Vac
	1600Vac
	1600Vac
	500Vac

1. EMC
2. L/N

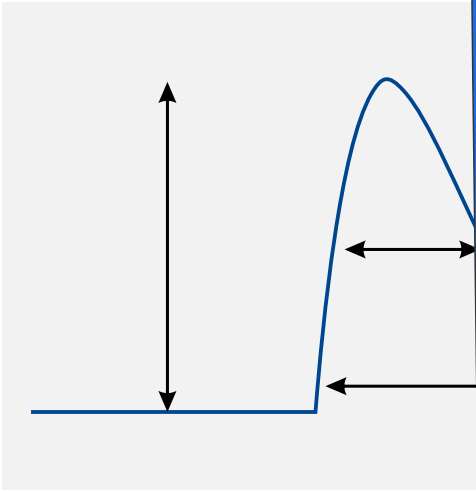


--

500Vdc
25A/1min
277Vac

EMC

		T(@10%)	T(@50%)
	60A	620uS	
	100A		300uS
	130A	630uS	


Vs. (Vin=220Vac)

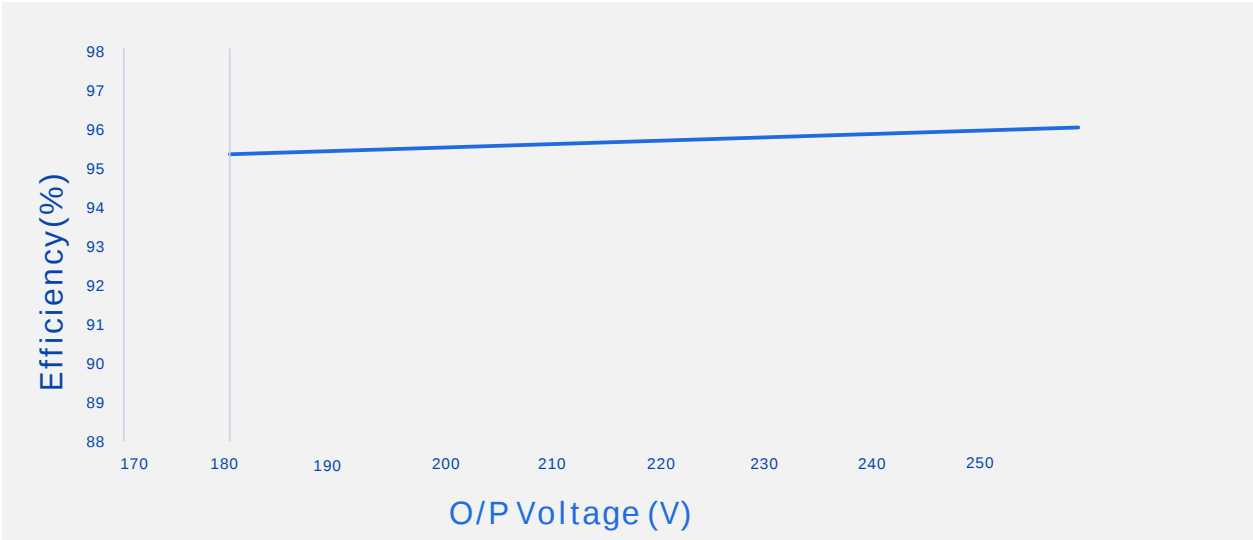

Vs. (Vin=277Vac)


Vs.

Vs.



Vs.







V00		2023/06/15	
V01		2025/08/07	