


S

: SS-200CNL-E260*

: 200W LED

: V06


: 2025-08-07

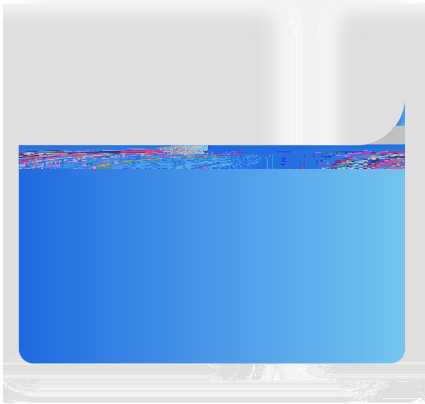

SS-200CNL-E(64)

“ * ”


“ * ”	DAL
B	




(120Vac)
(220Vac)
(277Vac)

SS-200CNL-E(64) LED


	180V		260V	180-200V
	200V		260V	$P_o = V_o \cdot I_o = 200W$
	0.77A		1.0A	1.0A 200V, 0.77A 260V
AOC	0.7A		1.0A	
			310V	
@120Vac	90.0%	92.0%		260V/0.77A
@220Vac	93.5%	95.5%		260V/0.77A
@277Vac	94.0%	96.0%		260V/0.77A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			1.0S	120Vac
			0.5S	220Vac
			0.75S	220Vac, DALI-2
	-2%		+2%	
	-3%		+3%	
	-0.03%/		+0.03%/	0 90
	90	100	110	
				DALI-2



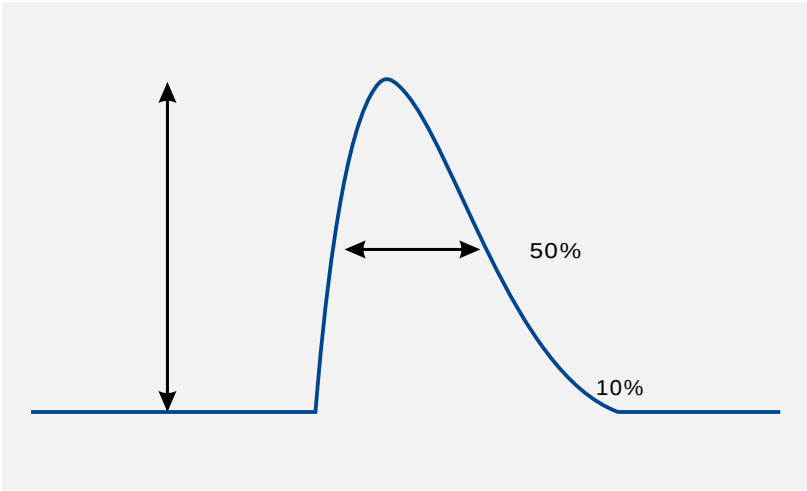


		T(@10%)	T(@50%)
120Vac	60A	620uS	
220Vac	100A		300uS
277Vac	130A	630uS	

Vs. (Vin=220Vac)

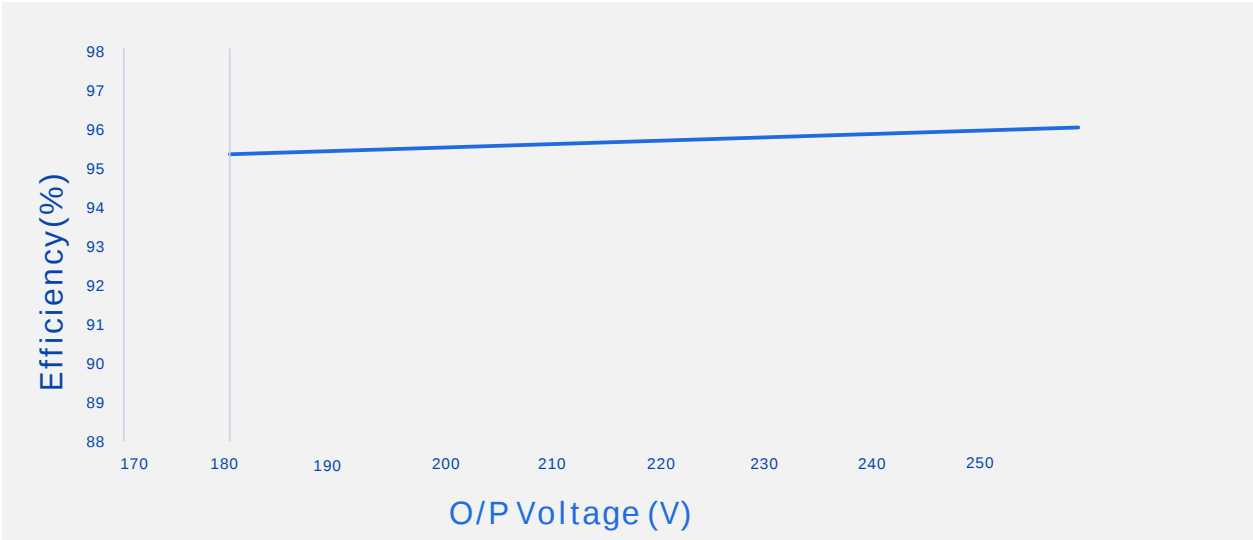


Vs. (Vin=277Vac)

Vs.

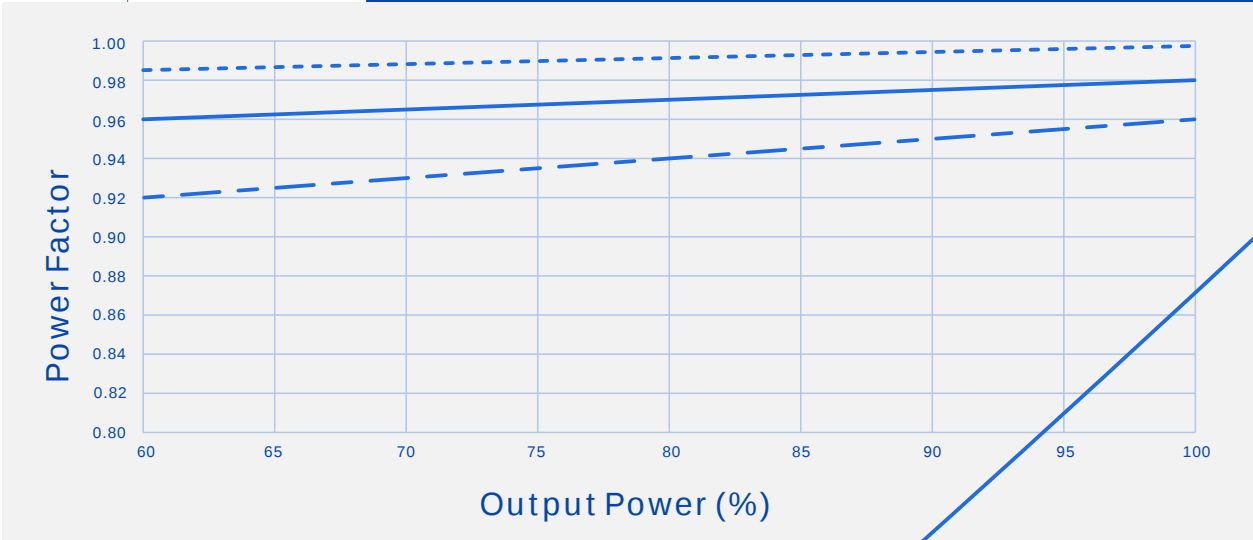

Vs.

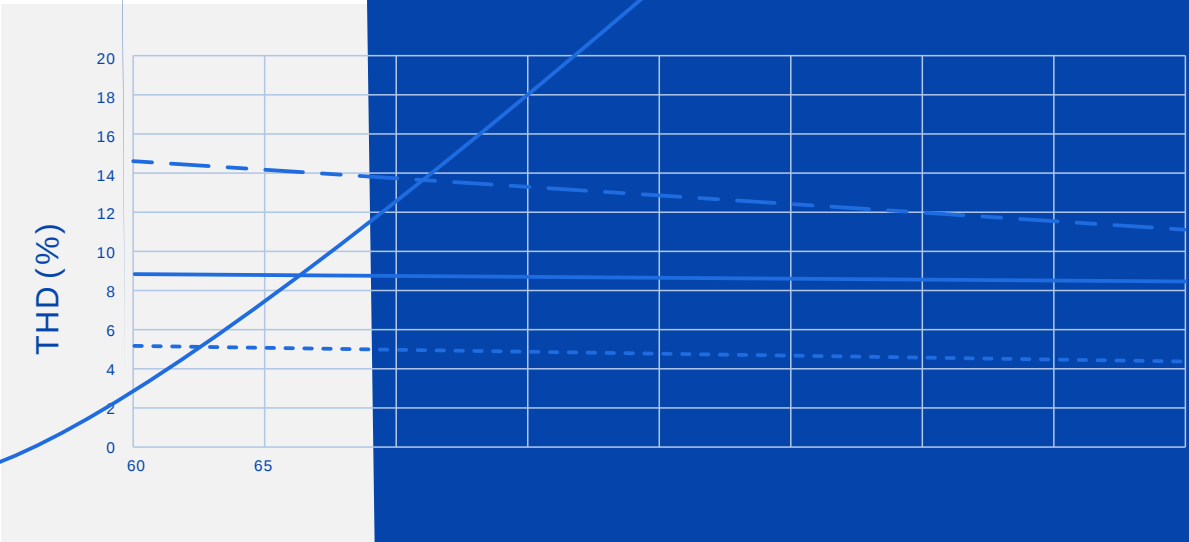







1		,		,	704
2					
3			5mm		
4		LED+	LED-	1.8mm	
5					
6	LED				
7	LED				
8			LED		


-		mm	×	×	=577 × 385 × 162;
-		15			
-	0.735kg			12.6kg	
-					

--	--	--	--	--	--

	GB 3873	83
1		

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------



V00		2022/06/30	
V01		2022/08/24	
V02	DALI	2023/02/01	
V03		2023/04/14	
V04		2023/05/06	
V05		2023/11/15	
V06		2025/08/07	