


: SS-200CNL-G260*

: 200W LED

: V04

: 2025-08-08



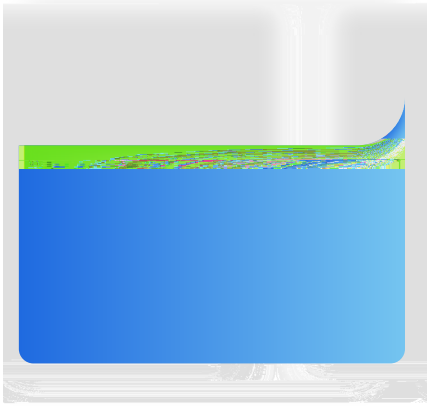

“ * ”



“ * ”		AUX 12V (:H)			
B					

--	--	--	--	--

	220Vac		240Vac	
	180Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			1.17A	198Vac
			228W	198Vac
(220Vac)			100A	
(240Vac)			130A	
	0.95	0.97		220Vac/50Hz
	0.90			220-240Vac/50Hz 70-100%
		7%	12%	220Vac/50Hz
			20%	220-240Vac/50Hz 70-100%

UL-G LED

	180V		260V	180-200V
	200V		260V	Po=Vo*Io=200W
	0.77A		1.0A	1.0A 200V,0.77A 260V
C	0.7A		1.0A	
			310V	
	93.5%	94.0%		260V/0.77A
	94.0%	94.5%		260V/0.77A
	94.5%	95.0%		260V/0.77A
	-5%		+5%	
		5%	10%	
			10%	
			1.0S	198Vac
			0.5S	220Vac
	-2%		+2%	
	-6%		+6%	
	-0.1%/		+0.1%/	0 90
	90	100	110	

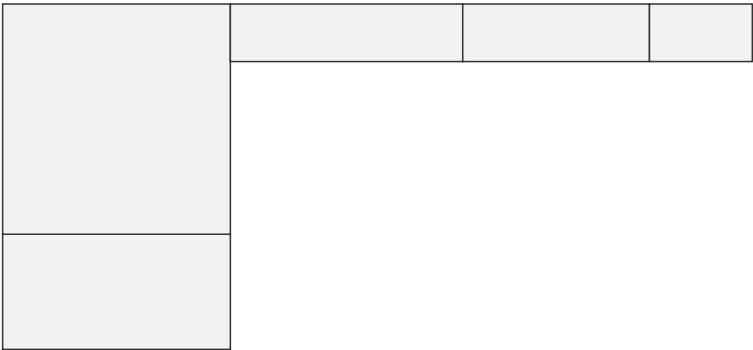

	≤ 85	≥ 50,000 hours	80% ,220Vac
MTBF		200,000 hours	220Vac, , 25 (MIL-HDBK-217F)
		IP65	
		90	
		5	: 85
		760g	
		Φ128mm*62.5mm	x

--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL	UL8750		
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015	✓	
RCM	AS/NZS61347.2.13		
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		


EMI/EMS	/	
---------	---	--

	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B(6kV, 6kV)





Vs. (Vin=220Vac)

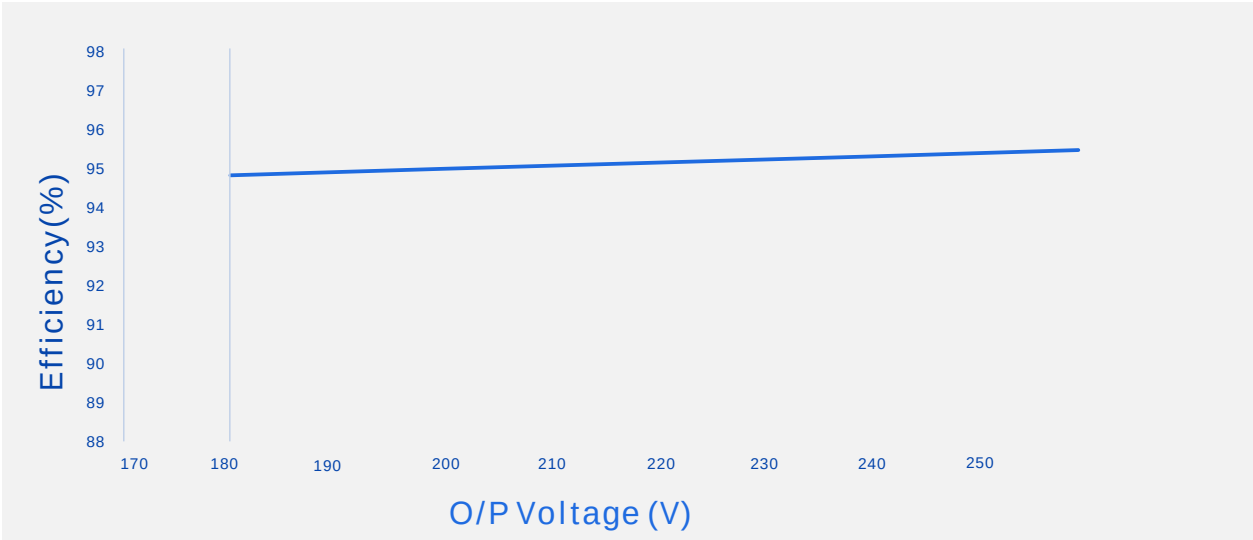


Vs. (Vin=264Vac)

Vs.

————— Vin=220Va ————

- - - -

Vs.







1

,

,

704

2

3

5mm

4

LED+

LED-

1.8mm

5

6

LED

7

LED

8

LED

-

mm

×

×

=577 × 385 × 162;

-

15

-

0.76kg

13kg

-

GB 3873

83


1

RoHS

RoHS

(2011/65/EU)

2015/863/EU



V00	2023/01/10