


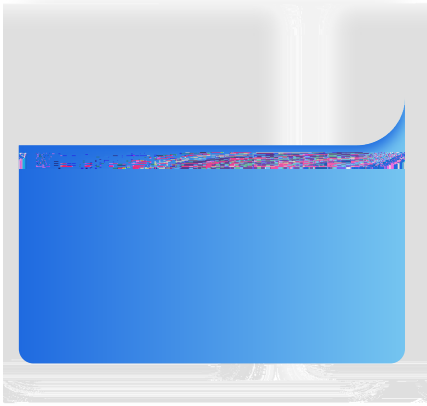

	120Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			2.4A	12 Vac
			60A	
(220Vac)			100^	
(277Vac)			2A	
	0.95			220Vac/50Hz
	0.90			120-277Vac/50Hz
				70-100%

BHD +

240W(A)-200W(B)-150W(C)
CW NW WW

BHB


A	B	C
240 (W)		

240W(A)-200W(B)-150W(C)
CW NW WW

LED

	180V		260V	
	200V		260V	$P_o = V_o \cdot I_o = 240W$
	0.92A		1.2A	1.2A 200V, 0.92A 260V

			310V	



SS-240CN


Tcase	25	+90	mT	
	25	+90		
10%RH		90%RH		
5%RH				
-65m		4000m		
UL/cUL				
TUV				
-u				
RCM	AS/NZS61347.2.13			
CCC	GB 19510.14-2009			
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013			

EMI/EMS	/	
—	FCC Part 15 Subpart B; ANSI C63.4:2014	
	FCC Part 15 Subpart B; ANSI C63.4:2014	
	IEC/EN 61000-3-2:2019+A1:2021	Class C


Vs. (/AOC)

Vs. (Vin=120Vac)

Vs. (Vin=220Vac)

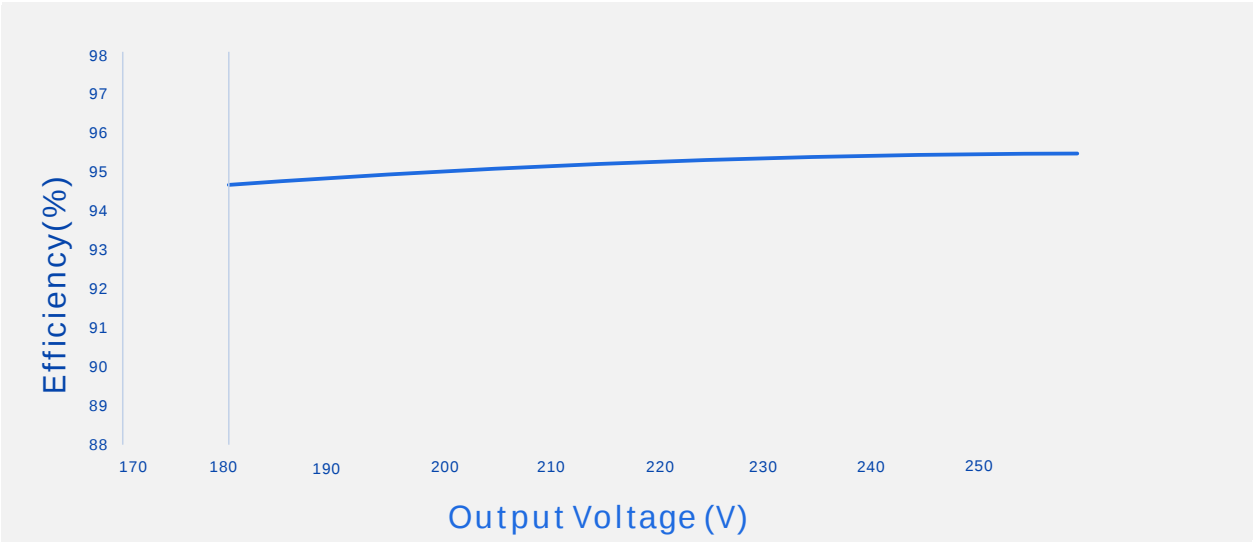

Vs. (Vin=277Vac)






1	1	704
	exEu5CE	

-	mm	×	×	=577 × 385 × 162;
-	15			
-	0.85kg		14.5kg	
-				

--

GB 3873 83
1

RoHS			
	RoHS	(2011/65/EU)	2015/863/EU



V00		2023/06/15	
V01		2025/08/07	