


: SS-240CNL-G260\*

: 240W LED

: V04

: 2025-08-08



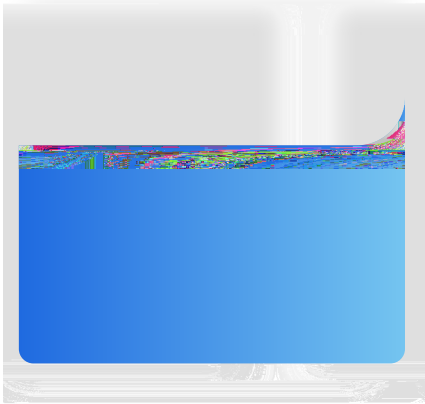




|  |  |  |  |        |
|--|--|--|--|--------|
|  |  |  |  |        |
|  |  |  |  |        |
|  |  |  |  |        |
|  |  |  |  | 198Vac |

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |

|       |        |       |      |                      |
|-------|--------|-------|------|----------------------|
|       |        |       |      |                      |
|       | 180V   |       | 260V |                      |
|       | 200V   |       | 260V | Po=Vo*Io=240W        |
|       | 0.92A  |       | 1.2A | 1.2A 200V,0.92A 260V |
| AOC   | 0.84A  |       | 1.2A |                      |
|       |        |       | 310V |                      |
|       | 93.0%  | 93.5% |      | 260V/0.92A           |
|       | 93.0%  | 94.5% |      | 260V/0.92A           |
|       | 94.0%  | 95.0% |      | 260V/0.92A           |
|       |        |       | +5%  |                      |
| PK-AV |        | 5%    | 10%  |                      |
|       |        |       | 10%  |                      |
|       |        |       | 0.5S | 220Vac               |
|       |        |       |      |                      |
|       | -6%    |       |      |                      |
|       | -0.1%/ |       |      |                      |
|       | 90     |       |      |                      |
|       |        |       |      |                      |




|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |

|      |      |                |                              |
|------|------|----------------|------------------------------|
|      | ≤ 85 | ≥ 50,000 hours | 80% ,220Vac                  |
| MTBF |      | 200,000 hours  | 220Vac, , 25 (MIL-HDBK-217F) |
|      |      | IP65           |                              |
|      |      | 90             |                              |
|      |      | 5              | : 85                         |
|      |      | 760g           |                              |
|      |      | Φ128mm*62.5mm  | x                            |

|       |       |    |       |  |
|-------|-------|----|-------|--|
|       |       |    |       |  |
| Tcase | -40   | 25 | +90   |  |
|       | -40   | 25 | +90   |  |
|       | 10%RH | u  | 90%RH |  |
| * j   | 5%RH  |    | 95%RH |  |
|       | -65m  |    | 4000m |  |

|  |  |  |   |
|--|--|--|---|
|  |  |  | v |
|  |  |  |   |
|  |  |  |   |
|  |  |  |   |


|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |








Vs.

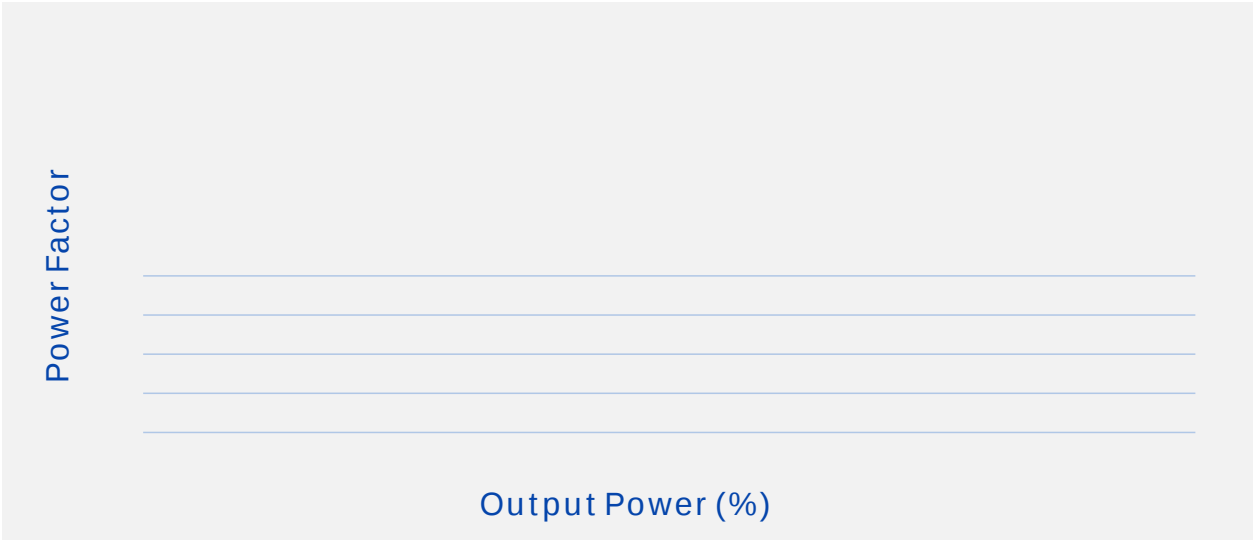

Vs.



SS-240CNL-G

LED

Vs.







1, 2, 3, 704, 2, 3, 3, 3, 0, \*

- mm × × =577 × 385 × 162;  
- 15  
- 0.76kg 13kg  
-

GB 3873 83

1

## RoHS

|      |              |             |
|------|--------------|-------------|
| RoHS | (2011/65/EU) | 2015/863/EU |
|------|--------------|-------------|

