


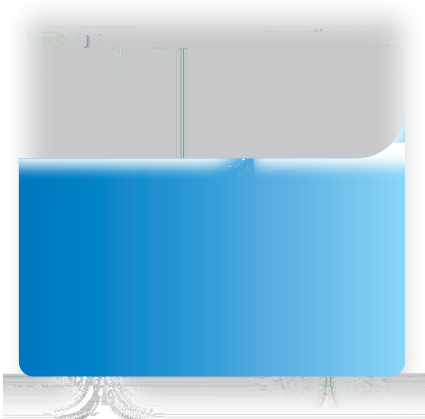

VVc

	277Vac		480Vac
	249Vac		528Vac
	47Hz		63Hz
			1.2A


Va

4 VVac

--	--	--	--	--


--







Vs.


/AOC








Vs.



* ú





- mm) : × × =580×433×210;
- 8
- 1.8kg 15.5kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

V00		2019/08/20	