

SS-55EP-M54BH LED

	120Vac		347Vac	
	108Vac		380Vac	
	47Hz	50/60Hz	63Hz	
			0.7A	120Vac
			70W	120Vac
(120Vac)			80A	
(277Vac)			140A	
(347Vac)			160A	
			3W	347Vac/60Hz
	0.90	0.95		347Vac/ 60Hz
	0.90			120-347Vac/60Hz 70-100%
		10%	15%	347Vac/60Hz
			20%	120-347Vac/60Hz 70-100%

≤ 85	≥ 50,000 hours	
MTBF	205,000 hours	20Vac, 25°C
	90	
	5	85
	420g	
	164mm*45.5mm*31mm	




M5



SS-55EP-M54BH LED

Vs. (/AOC)




Vs. (Vin=120Vac)

SS-55EP-M54BH LED

Vs. (Vin=277Vac)


ηD

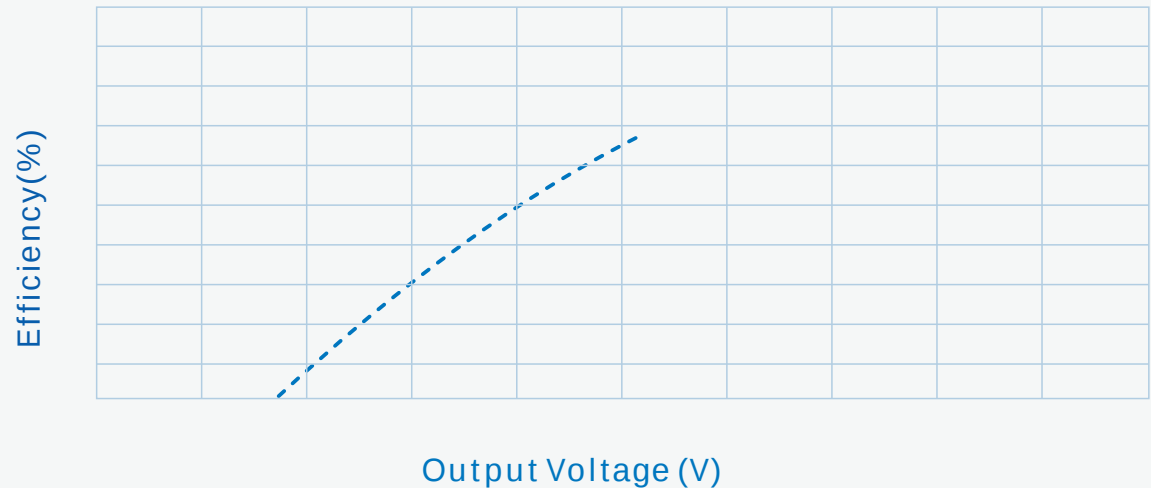

----- Io=1520mA

- . - . Io=1020mA

Vs. (Vin=347Vac)

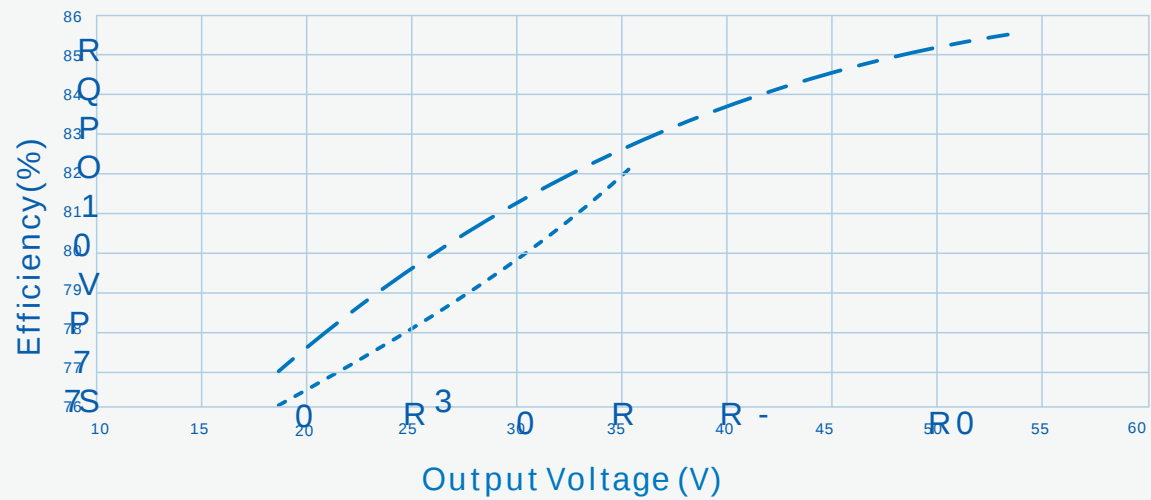


----- Io=1520mA

- . - . Io=1020mA


SS-55EP-M54BH LED

Vs.

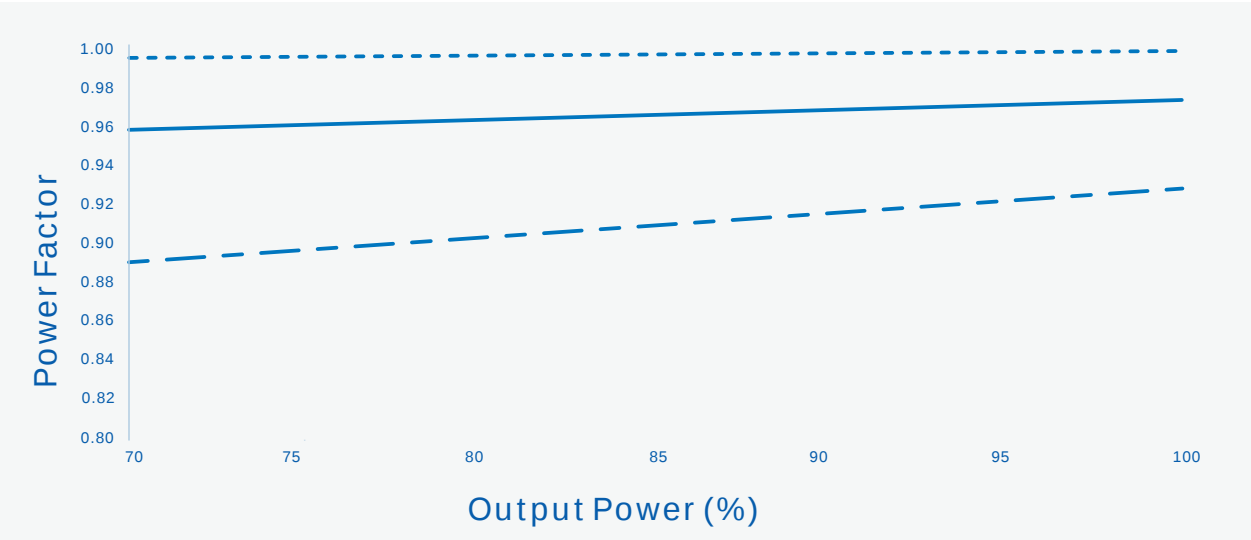

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac

Vs.

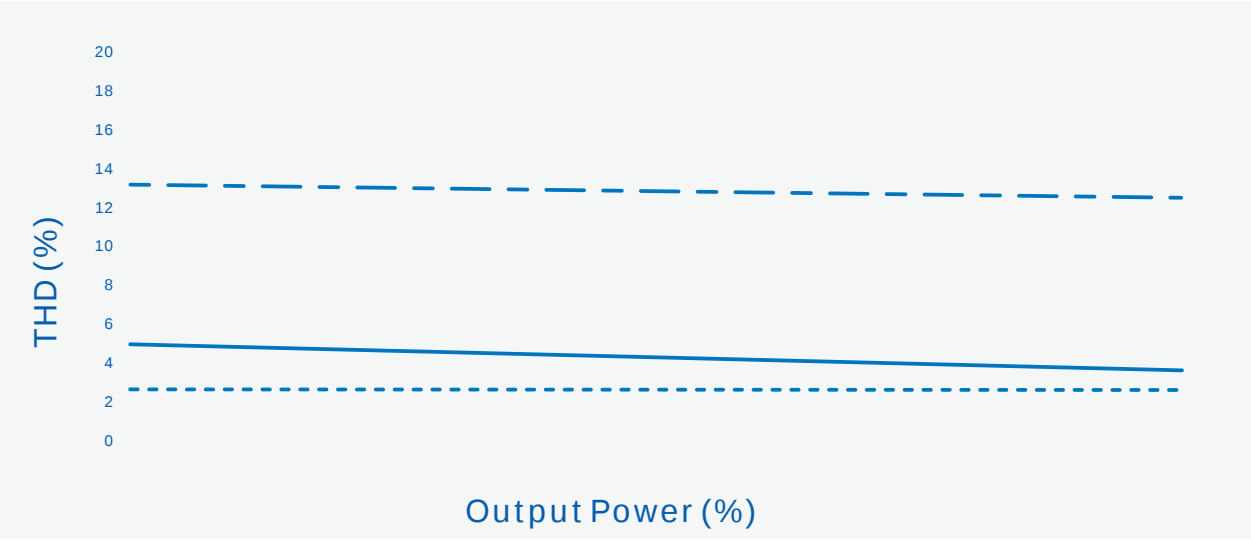

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac



Vs §

Vs.

- mm × × =495 × 385 × 162;
- 20
- 0.42kg 10kg
-

GB 3873 83

e /

≡

" W

1

SS-55EP-M54BH LED



V00		2024/07/17	

