



: SS-600VP-EXX
: 600W LED
: V02
: 2025-10-13

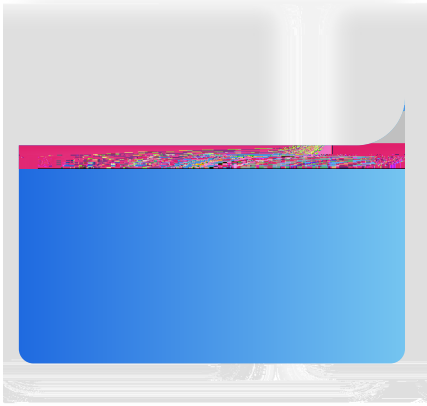

SS-600VP-E

LED



	90 Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			7A	120Vac
			680W	120Vac
(120Vac)			30A	冷机启动
(220Vac)			56A	
(277Vac)			70A	
			0.5W	220Vaℓ
				220Vac/50Hz
				120-277Vac 70%-100%
				220Vac/50Hz
				120-277Vac 70%-100%

Top

--	--	--	--	--

	28V		56V	28-48V
	48V		56V	$P_o = V_o \cdot I_o = 600W$
	10.7A		12.5A	12.5A 48V, 10.7A 56V



SS-600VP-E

LED

--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


EMI/EMS	/	
---------	---	--

:

--	--

	$\geq 10\text{M}\Omega$
	$\leq 0.1\Omega$
	$\leq 0.75\text{mA}$


1. EMC
2. LNěè
- EMC

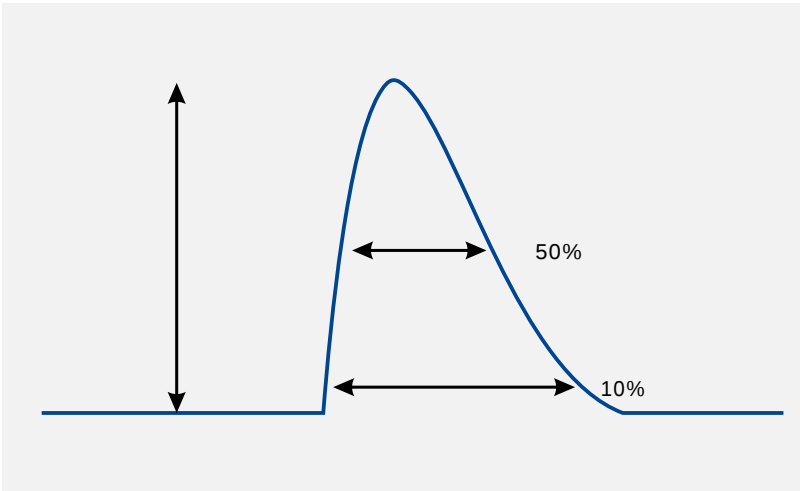

Vin		(@10%)	(@50%)
120Vac	30A	8mS	3mS
220Vac	56A	9mS	4mS
277Vac	70A	10mS	5mS

Vs.

/AOC



LED

=220Vac)

ge (V)

Efficiency(%)

94
92
90
88
86
84
82
80
24

48


52

56


233

86-755-29358800

Vs.

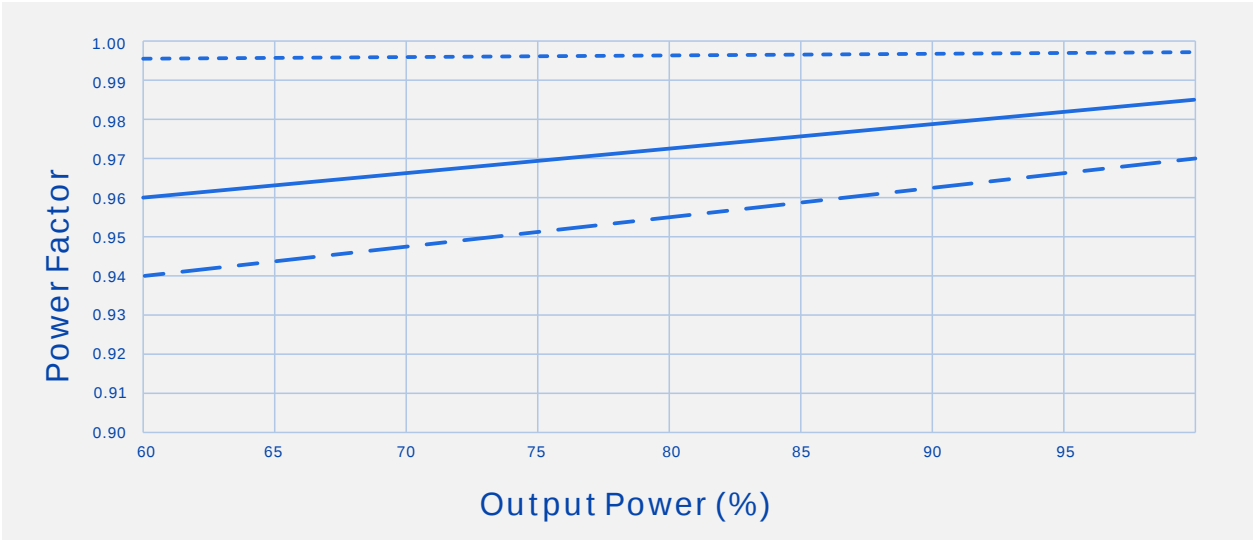

Vs.

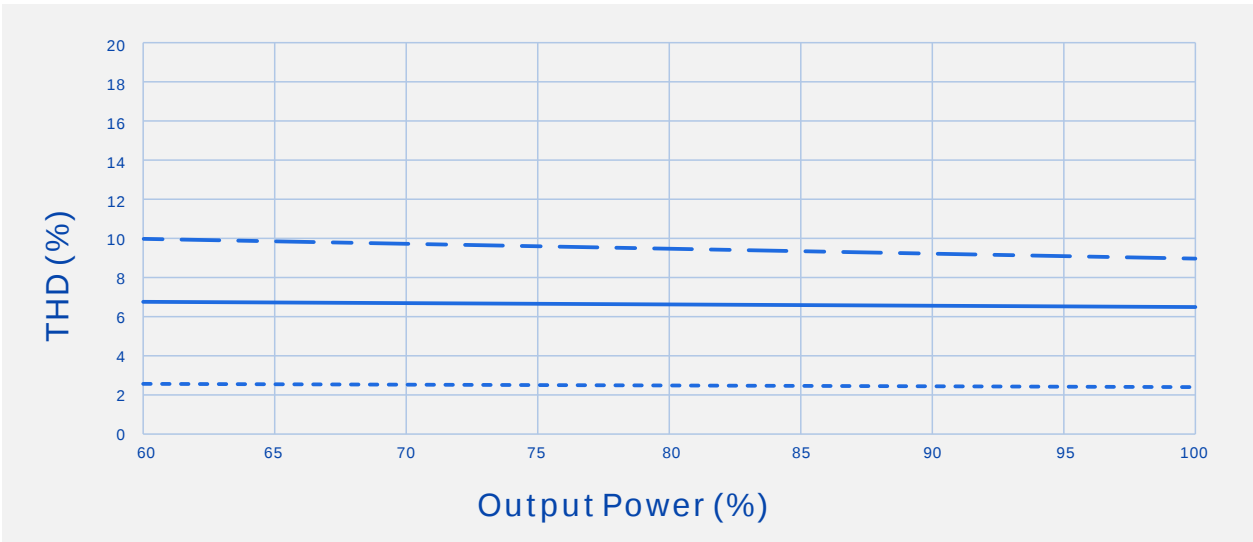


Vs.

SS-600VP-E LED

	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	Dim off状态(
			(


“ 10V() ” / “ 0V ”

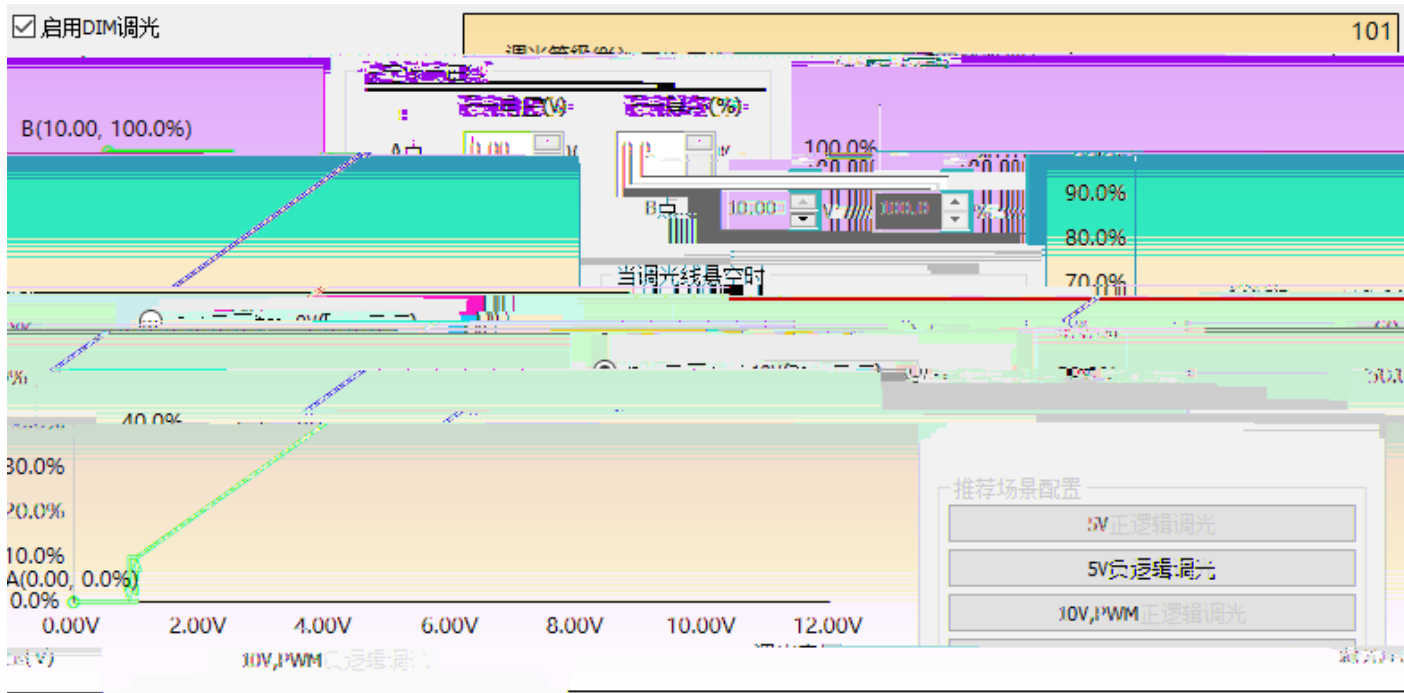

AC	(	450 ± 10 mm)		
SJOW	3*17AWG,	8.0mm	L	N
SJTW	3*16AWG	8.5mm	L	N
SJTW	3*18AWG	7.8mm	L	N



-
- è - ã m m × × =495 × 385 × 162;



V00			2024/11/09	