

: SS-75EP-M54BH

: 75W LED

: V01

: 2025-02-27



SS-75EP-M54BH LED

	120Vac		347Vac	
	108Vac		380Vac	
	47Hz	50/60Hz	63Hz	
			0.85A	120Vac
			96W	120Vac
(120Vac)			80A	
(277Vac)			150A	100%
(347Vac)			160A	
				347Vac/60Hz
	0.92			347Vac/60Hz
	0.90			120-347Vac/60Hz 70-100%
				347Vac/60Hz
				120-347Vac/60Hz 70-100%


.V

SS-75EP-M54BH LED

		10.8V	12V	13.2V	
				200mA	
0-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+/DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
()		0Kohm		100Kohm	
		10%Iomax		100%Ioset	DIM+ 110uA
		7%	8%	9%	PWM,
		9%	10%	11%	PWM,
	≤ 85	≥ 50,000 hours			80%
MTBF		205,000 hours			220Vac, , 25 (MIL-HDBK-217F)
		90			
		5			85
		560g			
		220mm*45.5mm*31mm			x x

25 LED




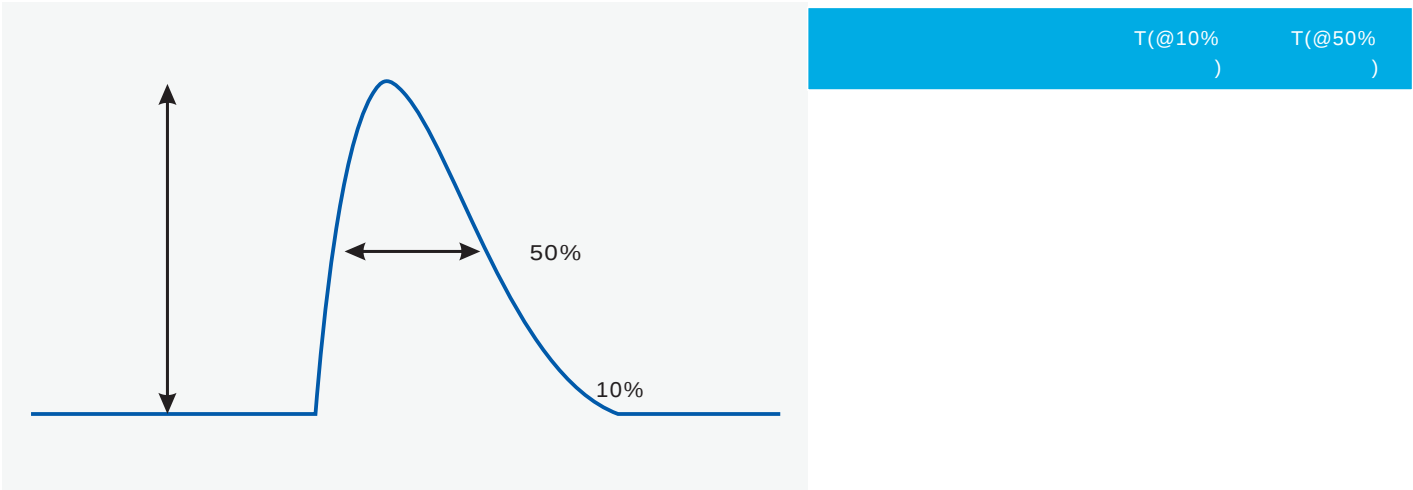

SS-75EP-M54BH LED

Vs. (/AOC)


Vs. (VS

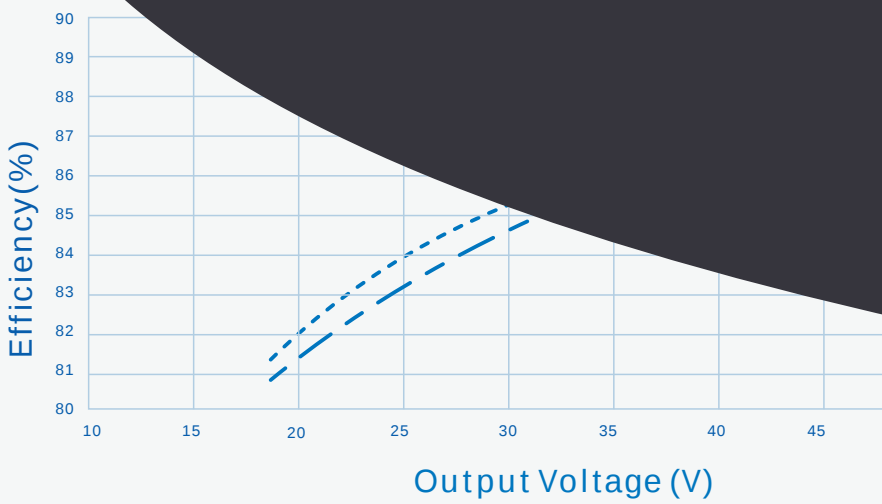

----- $I_o=2100\text{mA}$

SS-75EP-M54BH LED

Vs.

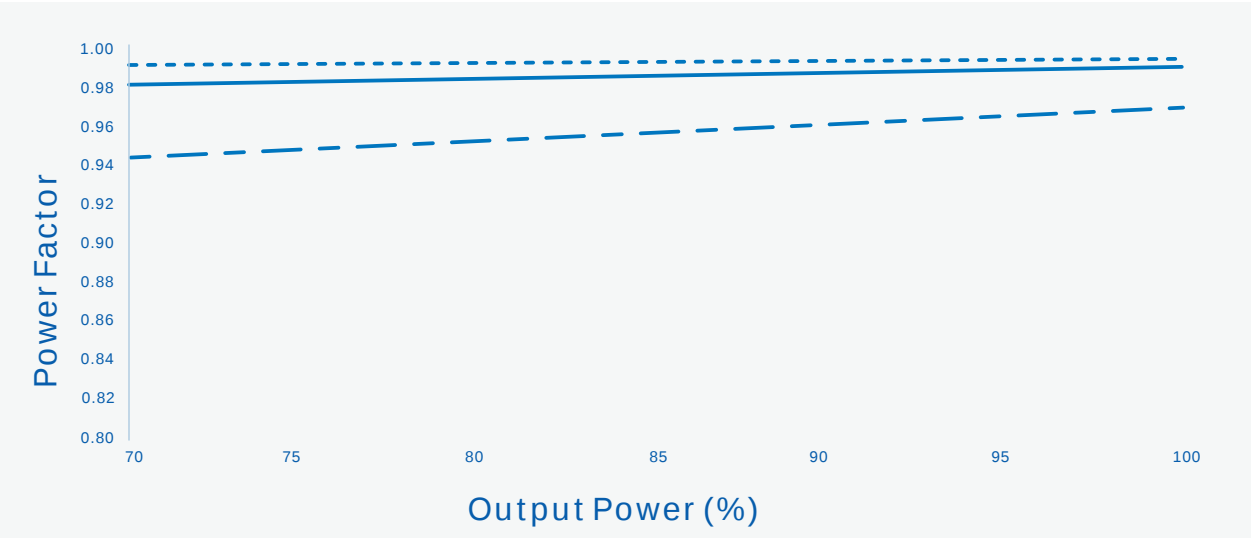

----- Vin=120Vac ————— Vin=277Vac - . - . Vin=347Vac

Vs.

Vs.

GB 3873 83

1

SS-75EP-M54BH LED

