

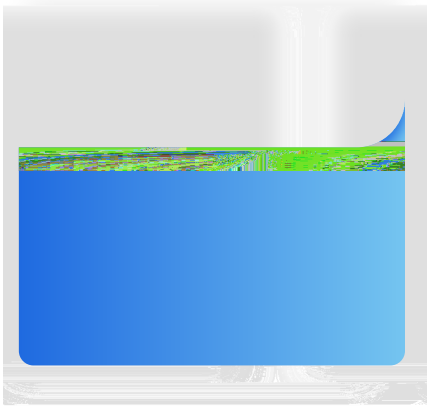


--	--	--	--	--	--	--	--	--





	36V		56V	Po=Vo*Io=150W
	2.6A		4.2A	4.2A 36V,2.6A 56V
AOC	2.1A		4.2A	
			60V	
@220Vac	91.0%	92.0%		46V/3.3A
@277Vac	91.5%	92.5%		46V/3.3A
	-5%		+5%	
PK-AV		5%	1Đ	
			1Đ	

	-2%		+2	
	-0.03%/		+0.03%/	
	90	1Đ	1 : 4	

		0V			
		1000mV	1	1	1
		1V			
		9.8V			
		0V			
		1KHz			
		10%			


	≤ 76	≥ 62,000 hours	80%
MTBF		200,000 hours	220Vac, , 25 (MIL-HDBK-217F)
		IP67	
		90	
		5	75
		850g	
		200mm*66mm*39.5mm	x x

Tcase	-40			
	-40			
	1			




		T(@10%)	T(@50%)
220Vac	110A		200uS
277Vac	120A	500uS	

Vs. (/AOC)



----- Dimming Window ————— AOC Window


Vs. (Vin=220Vac)

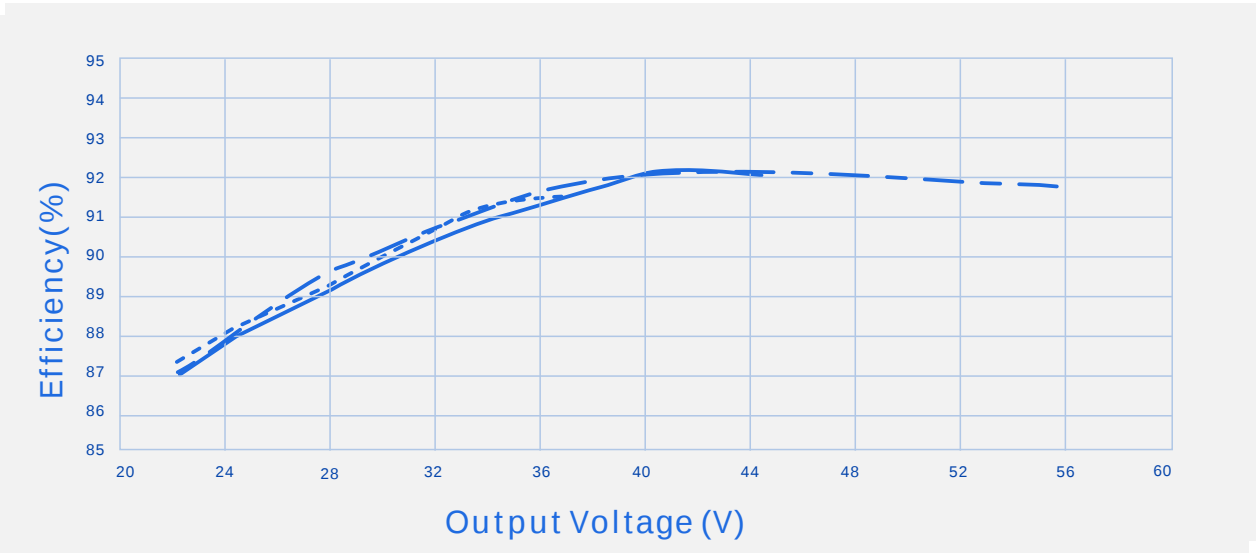


----- Io=4160mA ————— Io=3400mA - . - . - Io=2670mA

Vs.


Vs.



Vs. (60)




Vs.

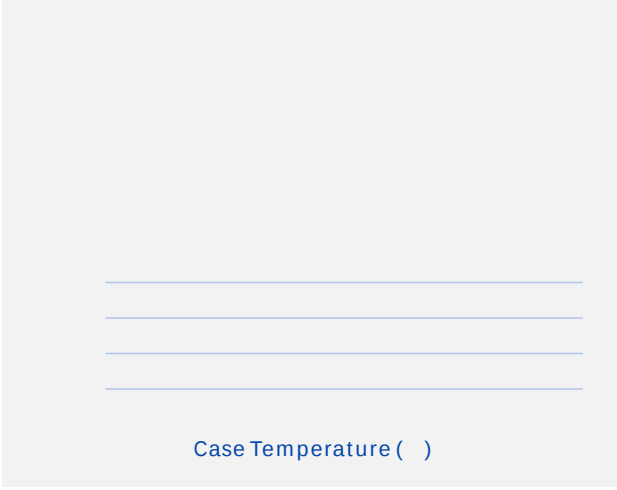

Vs.

Vs.

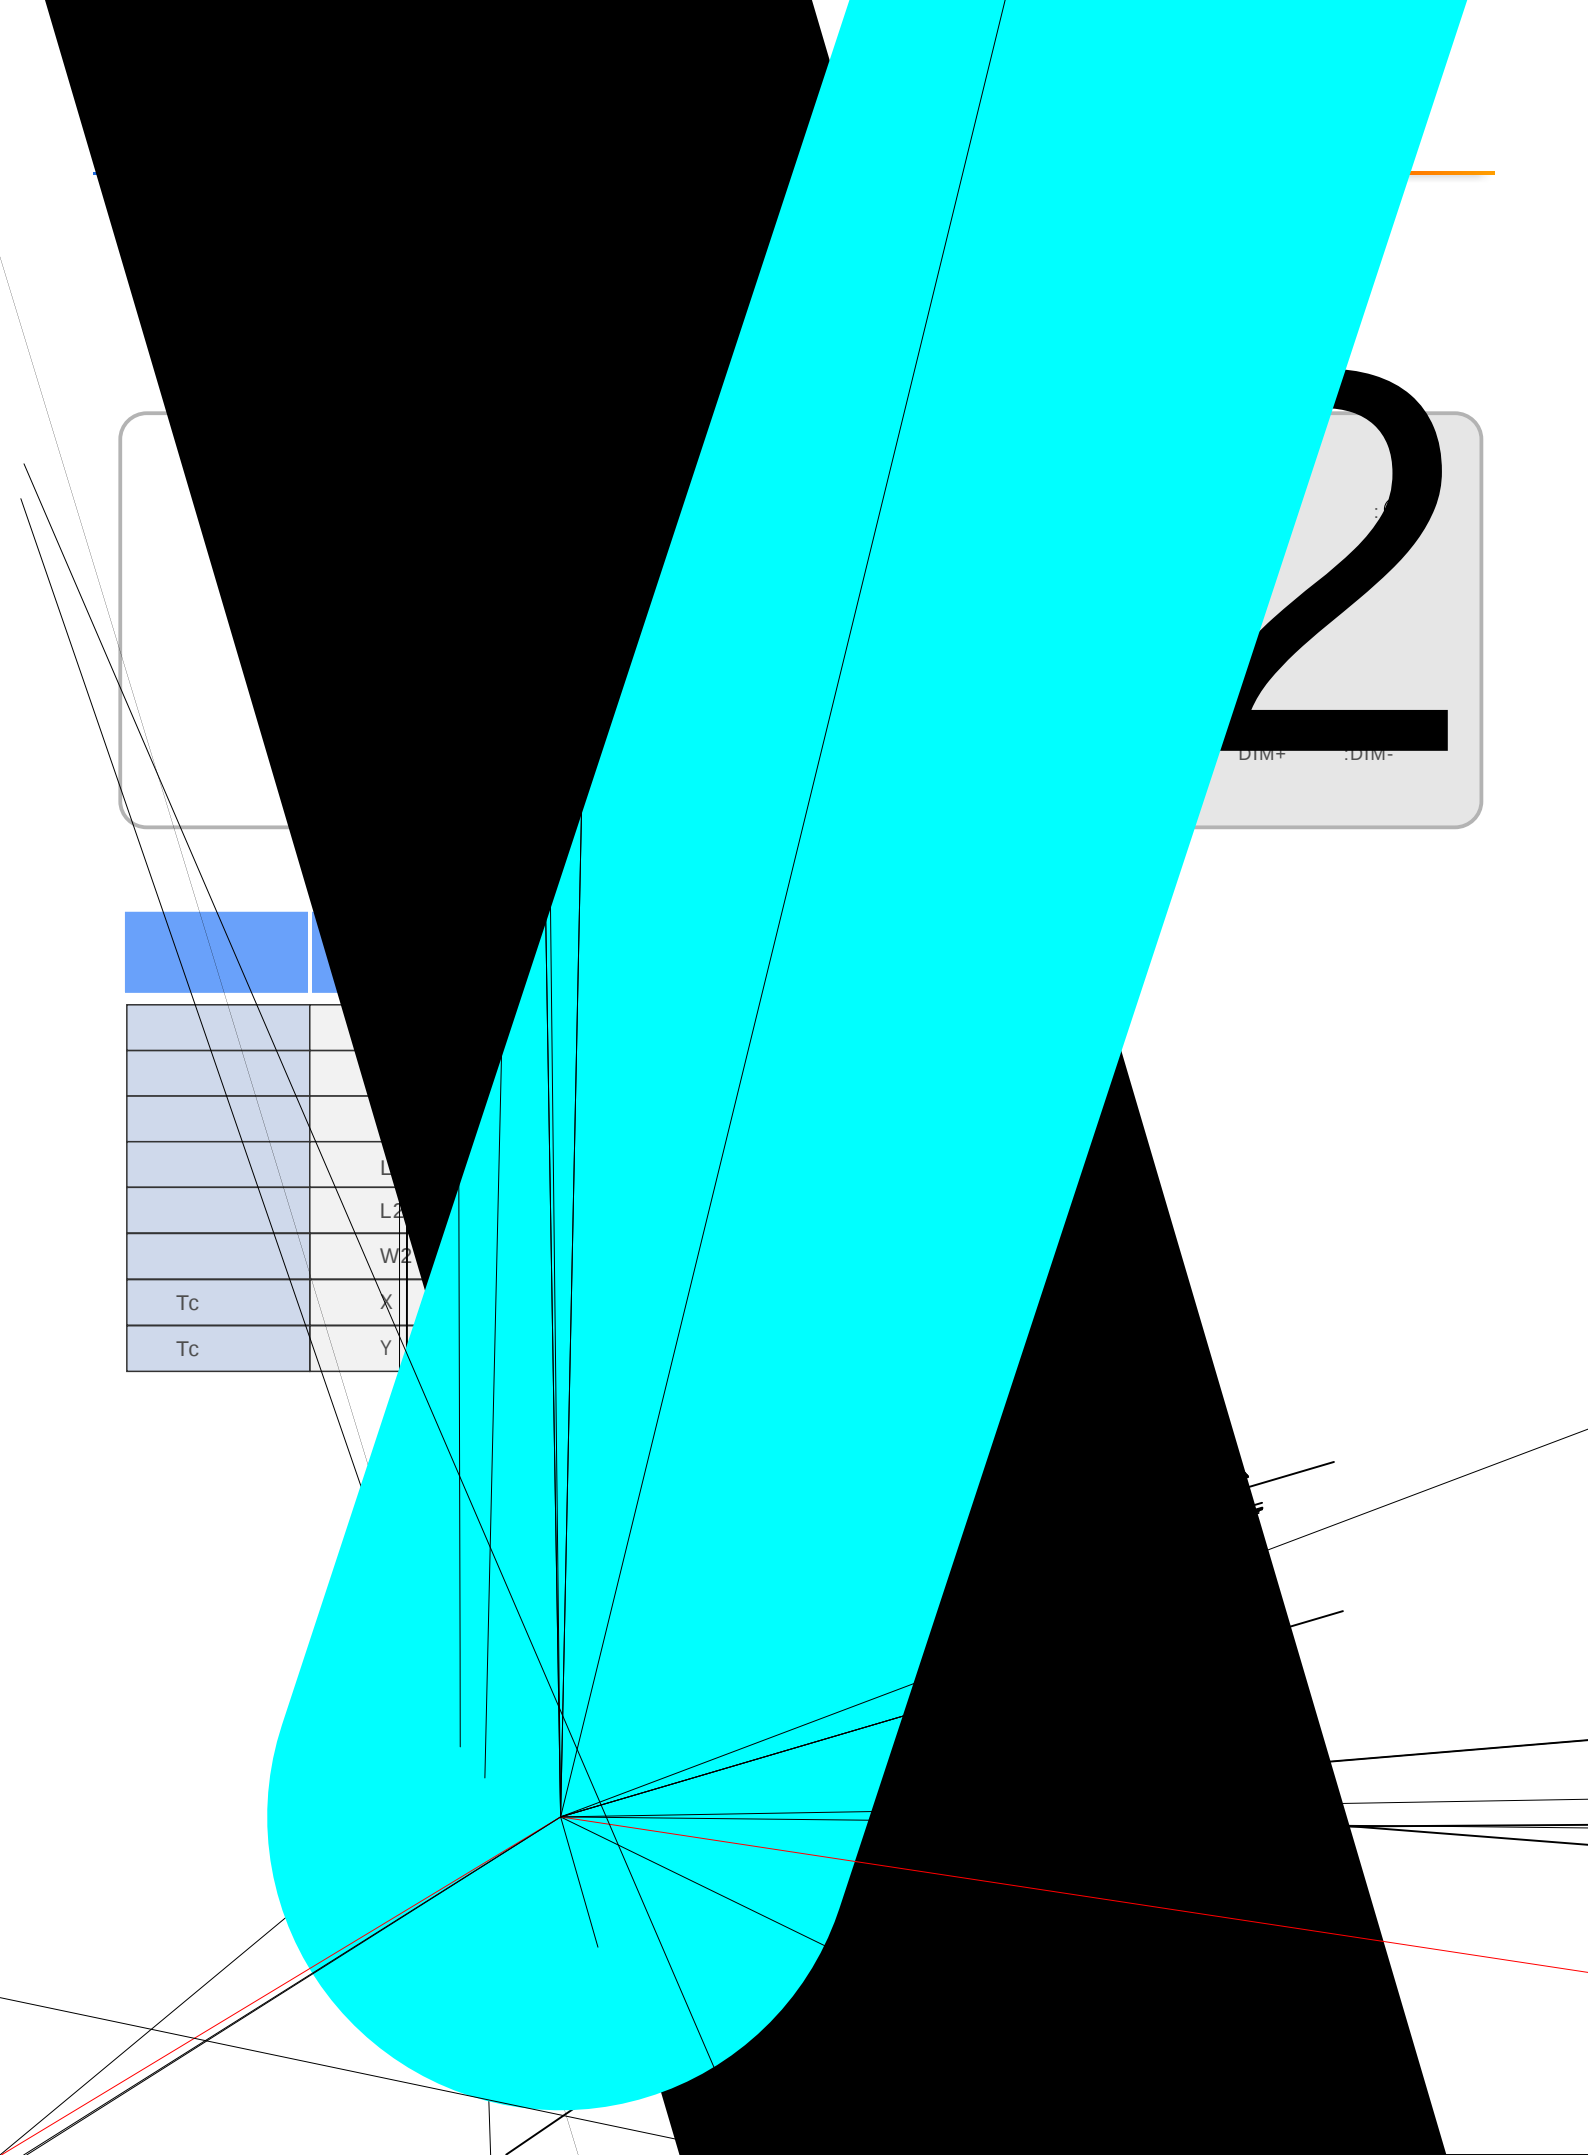

1

,

,

7

