

--	--	--	--



--

--	--	--	--	--

		0V			
		10%Iomax			
		1V			
		9.8V			
		0V			
		1			


	≤ 76	≥ 62,000 hours	80%
MTBF		280,000 hours	220Vac, , 25 (MIL-HDBK-217F)
		IP67	
		90	
		5	76
		550g	
		151.5mm*66mm*35.5mm	x x

LED

	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017		✓
	AS/NZS61347.2.13		
	K61347-1,K61347-2-13		
	GB 19510.14-2009		
	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

IS	/		
	EN55015:2013+A1:2014		
	EN 5015:2013+A1:2014		
	IEC/EN 61010-1:2011	C	
	IEC/EN 61010-2-010:2011		6kV 6kV
	IEC/EN 61010-2-011:2011		6kV

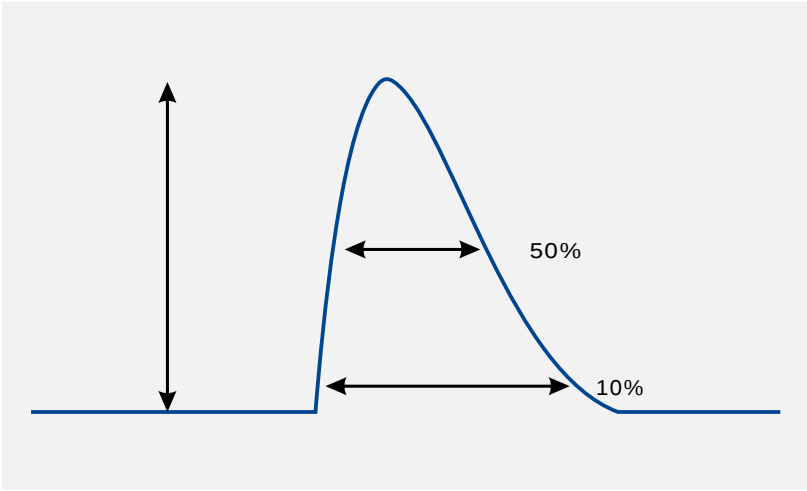


		T(@10%)	T(@50%)
220Vac	45A		200uS
277Vac	60A	500uS	


Vs. (/AOC)



Vs. (Vin=220Vac)




Vs. (Vin=277Vac)

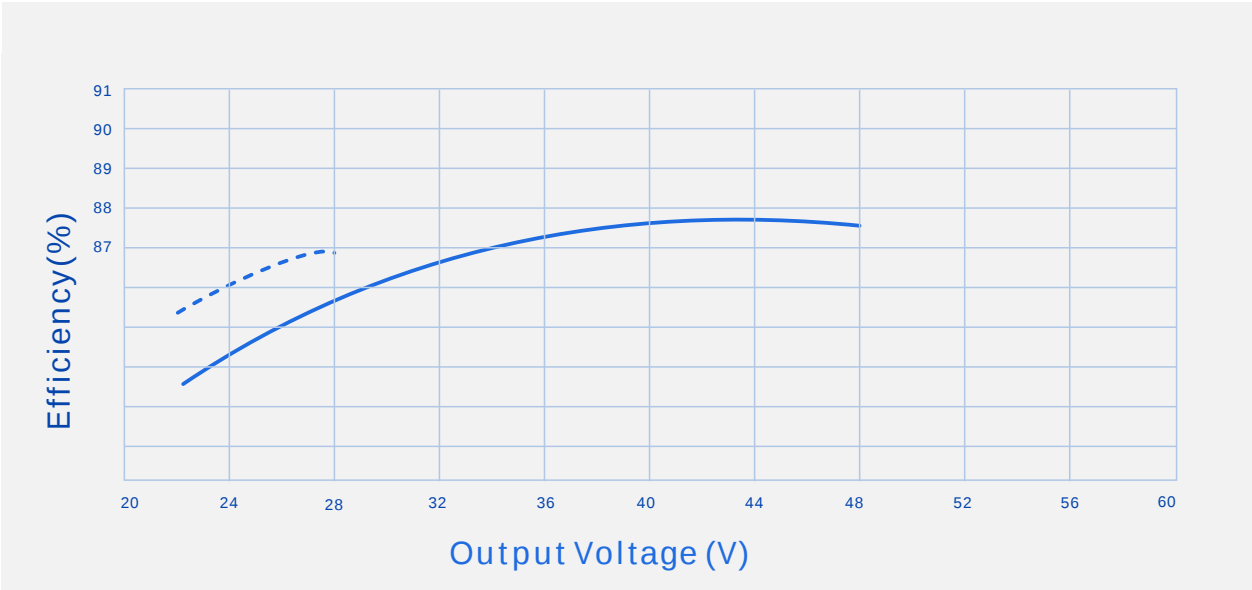


—————

- - - - -


Vs.



Vs.




- - - - -



Vs.

SS-65GA

LED

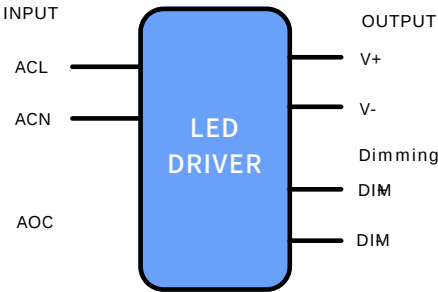

AC	(	450 ± 10mm)			
H05RN-F	3*1.0mm ²	7.3mm	:L	:N	:⏏
DC	(	250 ± 10mm)			
H05RN-F	2*1.0mm ²	:7.0mm	:V+	:V-	
DIM	(	220 ± 10mm)			
H05RN-F	2*0.75mm ²	6.4mm	DIM+	:DIM-	

		mm(In.)
	L3	127.5(5.0)
	W1	66(2.6)
	H	35.5(1.4)
	L1	151.5(5.96)
	L2	137(5.39)
	W2	32(1.26)
Tc	X	54(2.13)
Tc	Y	30(1.18)



1 , , 704

2

- mm × × =495 × 385 × 162;

- - -



V00		2018/10/18	
V01		2019/04/04	
V02		2019/07/20	
V03	CCC	2019/10/29	
V04		2020/06/02	
V05	10-0V	2020/11/10	
V06		2021/07/02	
V07		2025/12/22	