


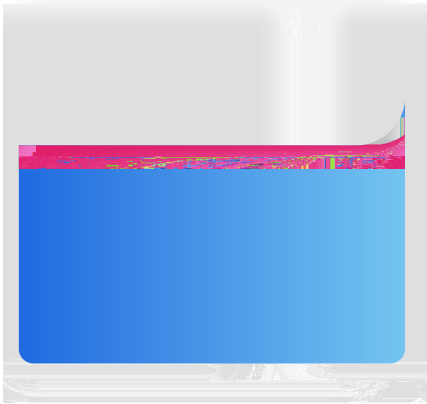

型号								
----	--	--	--	--	--	--	--	--

SS-200CNS-260*LED

e “ * ”	U	I	Đ
" * "	AUX 12V (:H)	0-10V/PWM/Resistor ()	
BHB		✓	
BHD	✓ G		

--	--	--	--	--

	277Vac		480Vac	
	249Vac		528Vac	
	47Hz	50/60Hz	63Hz	
			1.06A	277Vac
			230W	277Vac
(277Vac)			50A	冷机启动
(347Vac)			70A	冷机启动
(480Vac)			90A	冷机启动
			1.5W	347Vac/60Hz ,
	0.93	0.97		277-480Vac/60Hz
	0.90			277-480Vac/60Hz 70-100%
		7%	10%	277-480Vac/60Hz
			20%	277-480Vac/60Hz 70-100%

BHD

+

BHB

200W(A)-150W(B)-120W(C)

CW

NW


WW

200W(A)-150W(B)-120W(C)

CW

NW


WW



		0V			

--	--	--	--	--


Tcase	-40			

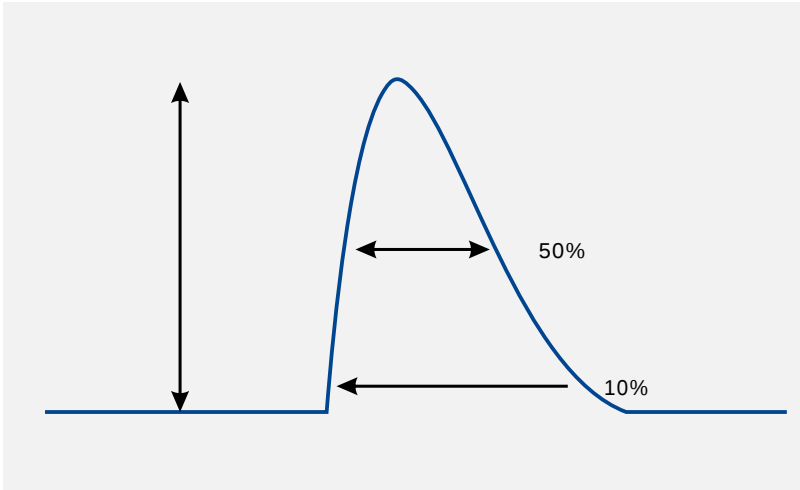

Vs.

/AOC

Vs. (Vin=347Vac)

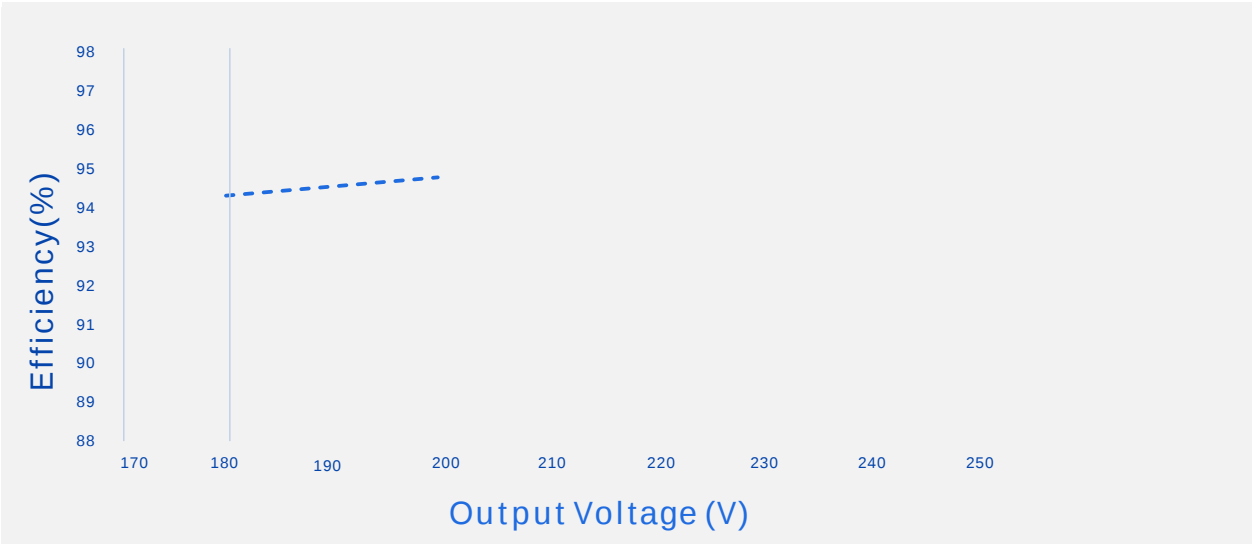

Vs. (Vin=480Vac)


Vs.

———— Vin=347Vac - - - Vin=480Vac

Vs.

- - -

Vs.

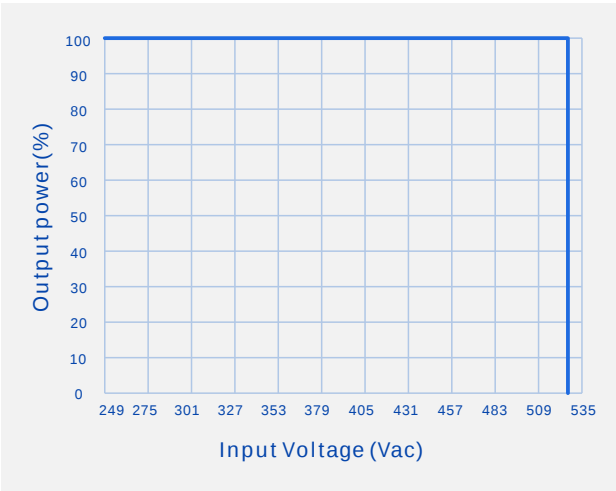


Vs.

377 V7 u W▶W▶

Vs.

Vs.

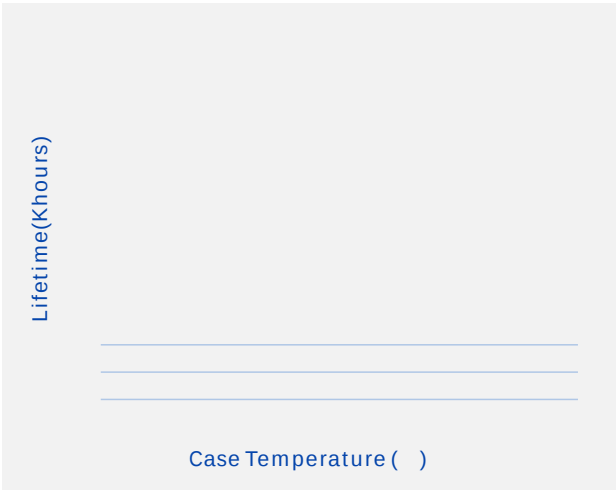

SS-200CNS-260*

LED



		mm(In.)
--	--	---------

1

2 AC DC DIM / / :


43±5mm 10±2mm;

Dim Cab		

SS-

LED





V00

2023/10/17