
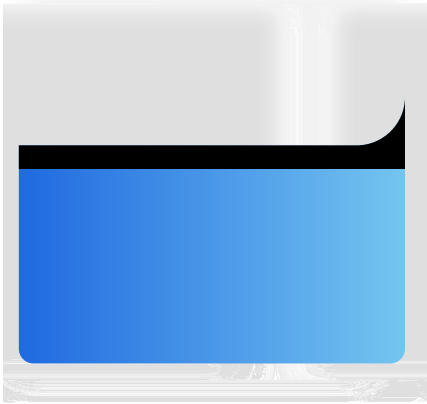



--	--	--

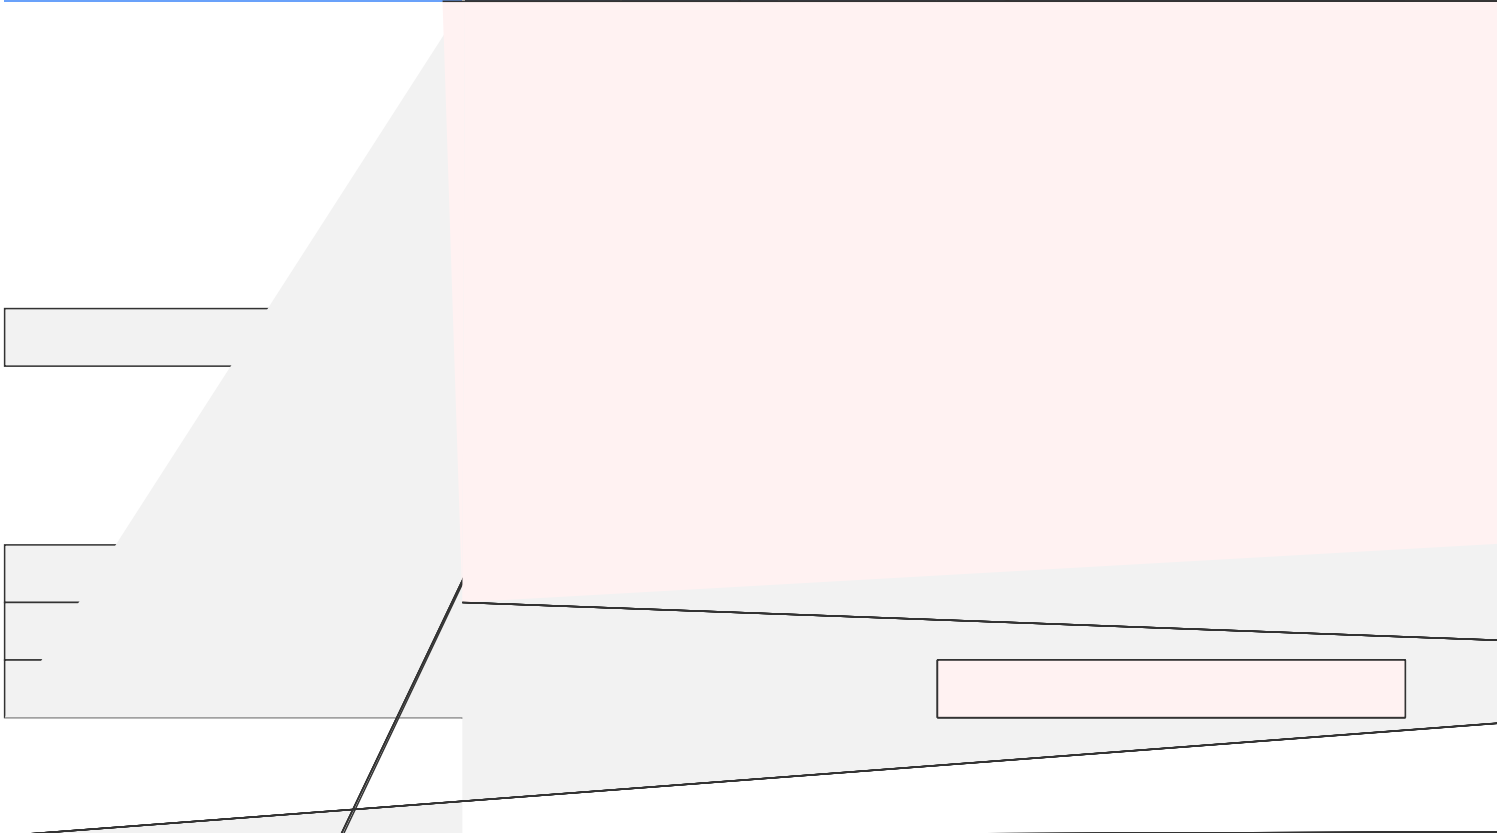

--	--	--	--	--

		10.8V	12V	13.5V	
				200mA	
0-10V		0V		12V	DIM+ 110uA
		10%loset		100%loset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	
		10%loset		100%loset	DIM+ 110uA
		0.7V	0.8V	0.95V	
		0.95V	1.1V	1.2V	
	≤ 85	50,000 hours			80%
MTBF		198,000 hours			347Vac, , 25 (MIL-HDBK-217F)
		90			
		5			85
		650g			
		220mm*52.5mm*34mm			x x

SS-240NS-260*

LED

--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL	UL8750		
TUV			
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:20		




Vs. /AOC




----- Gl p plqj Z lqgr z ———— DRF Z lqgr z

Vs. (Vin=200Vac)

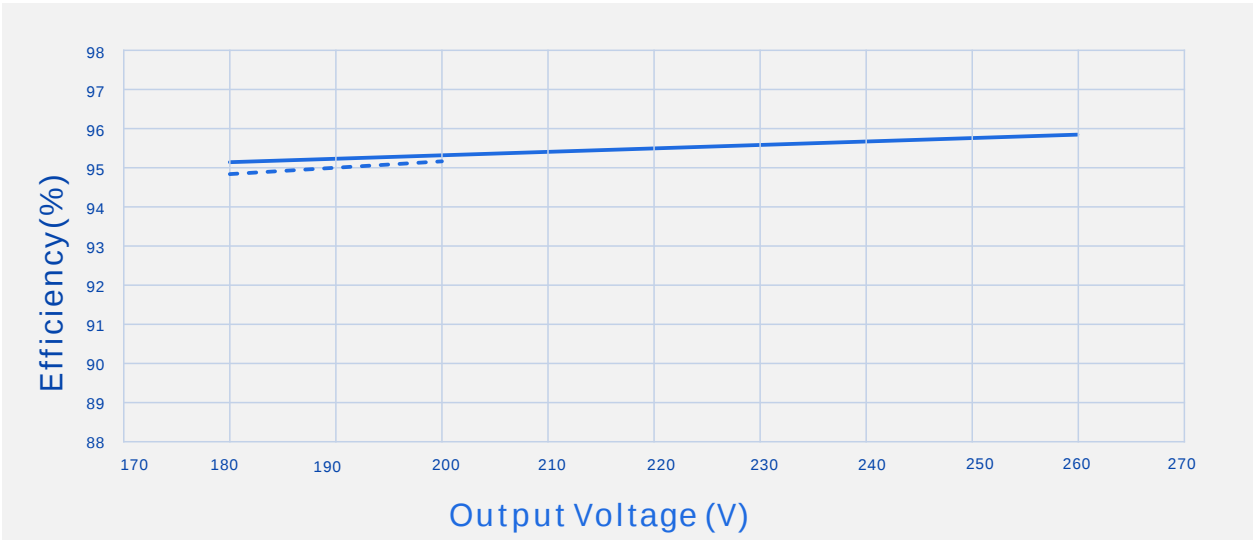

----- Io=1200mA ———— Io=923mA

Vs. (Vin=347Vac)

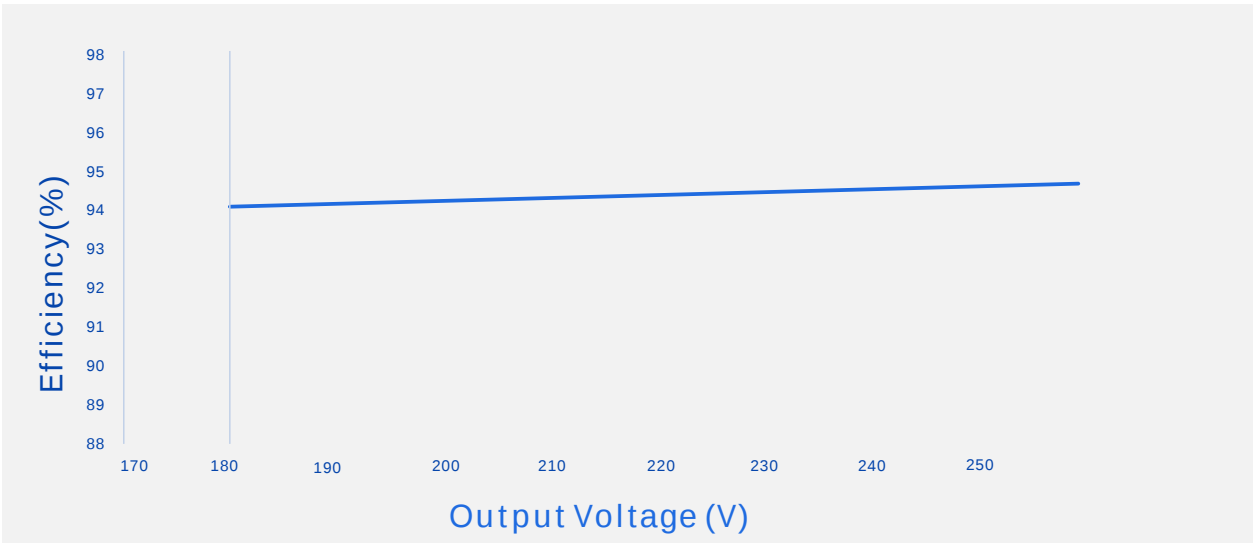

Vs. (Vin=480Vac)


SS-240NS-260*

LED

Đ

Vs.

Vs.

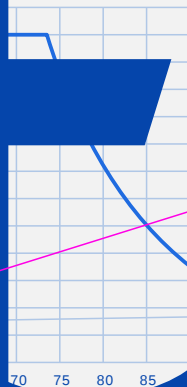







V00		2024/02/29	