

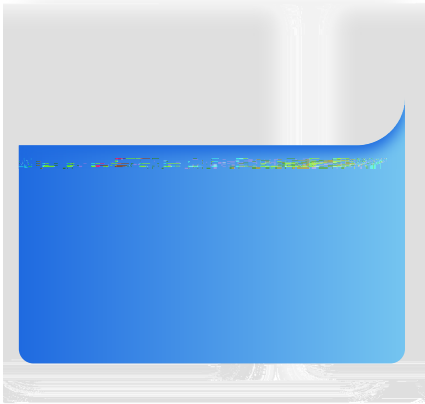






	200Vac		480Vac	
	180Vac		528Vac	
	47Hz	50/60Hz	63Hz	
			1.9A	200Vac
			380W	200Vac
				冷机启动


347Vac/60Hz ,
200-480Vac/60Hz
200-480Vac




Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	/	
	FCC Part15: Subpart B; ANSI 63.4:2014	Class A
	FCC Part15: Subpart B; ANSI 63.4:2014	Class A
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B 6kV 6kV
	IEC/EN 61000-4-12	B 6kV 6kV




1. EMC
2. L/N /

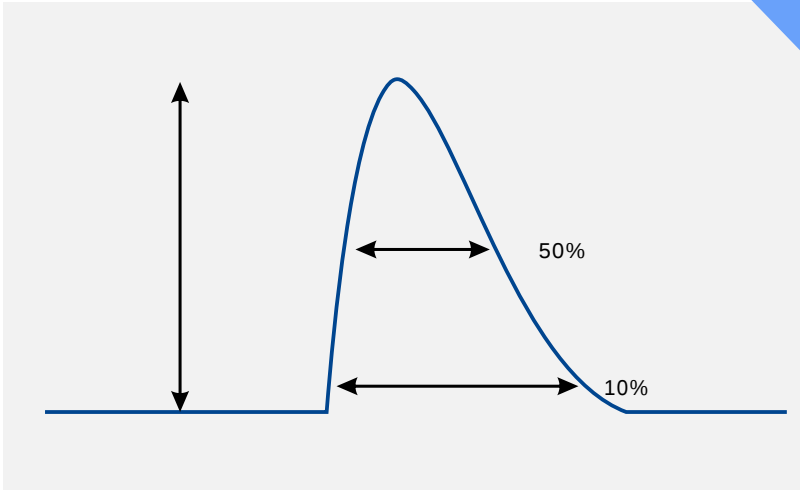


Vin		(@10%)	(@50%)
2	60A	378uS	
347Vac	110A		152uS
480Vac	10A	383uS	

Vs. /AOC




----- Gl p plqj Z lqgr z ———— DRF Z lqgr z

Vs. (Vin=200Vac)

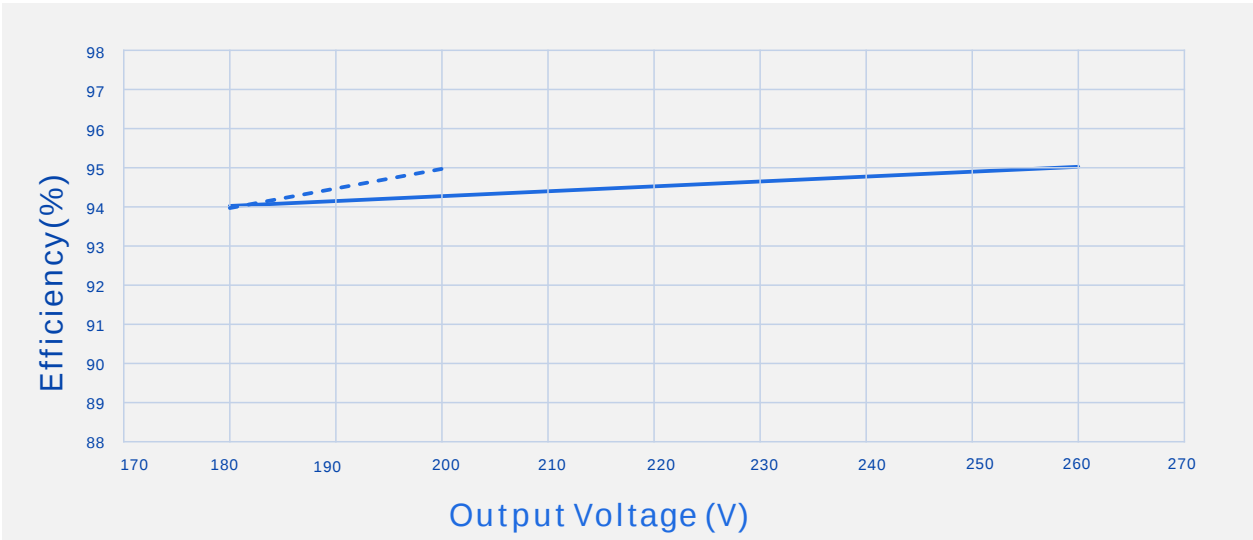


----- Io=1500mA ———— Io=1230mA

Vs. (Vin=347Vac)

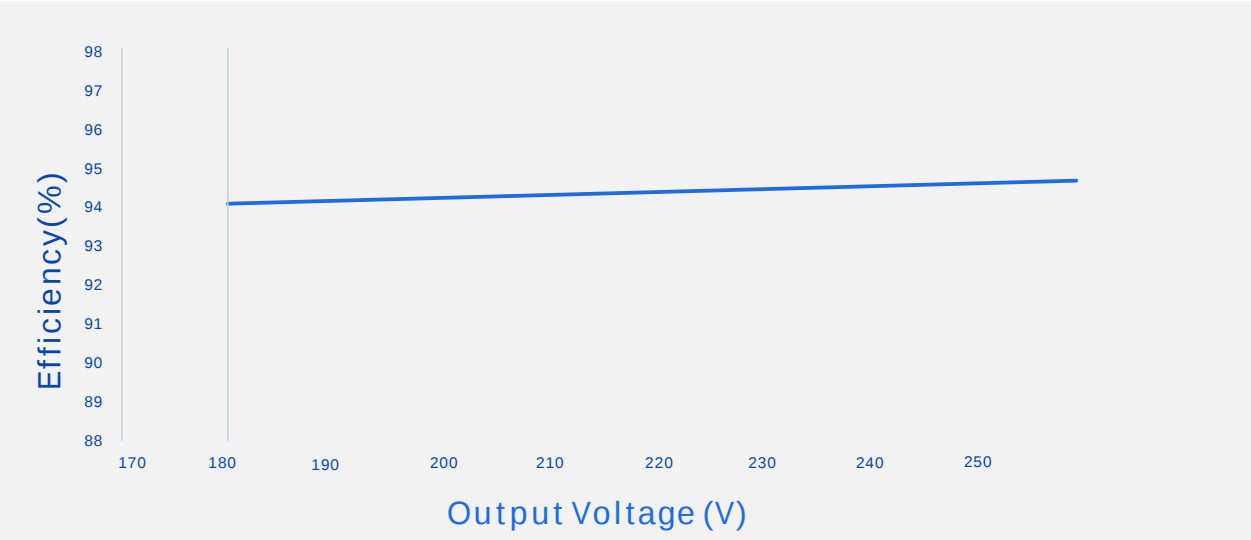

Vs. (Vin=480Vac)

Vs.



----- Vin=200Vac

———— Vin=347Vac

- - - Vin=480Vac

Vs.

----- Vin=200Vac

———— Vin=347Vac

- - - Vin=480Vac



Vs.

Vs.

Vs.





- 1

,

,

704
- 2
- 3

"

"

"

50

"

380cm²
- 115cm³;

LED
- 4
- 5

铝基板上LED+

LED-
- 6
- 7

LED
- 8

LED
- 9

LED

- mm

×

×

=445 × 300 × 153;
- 24
- 0.68kg

17.16kg
-

GB 3873 83

1

RoHS

RoHS

(2011/65/EU)

2015/863/EU



V00		2024/01/23	
V01		2025/09/26	
V02		2026/01/04	