






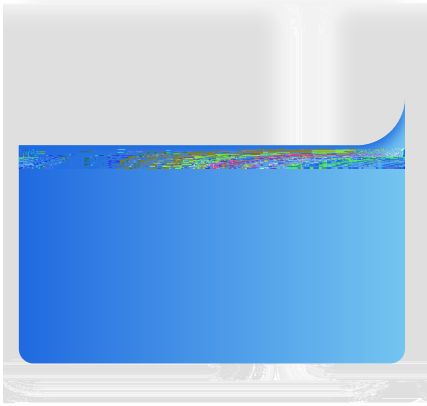

SS-75VH-E LED

0-10V		0V		12V	DIM+ 110uA DIM+/DIM- 0-5V					
		10%Iomax		100%Ioset						
		0V		10V						
10-0V		0V		10V	DIM+ 40uA DIM+/DIM- 5-0V					
PWM	PWM	9.8V		10.2V	DIM+ 110uA DIM+/DIM-					
	PWM	0V		0.3V						
	PWM	1KHz		2KHz						
	PWM	0%		100%						
						0-10V		0.8V	0.9V	1.0V
								9.0V	9.2V	9.4V
						10-0V		8.8V	9.0V	9.2V

	IP67	
	90	

	145mm*66mm*35mm	x x
--	-----------------	-----

) m

25 LED

1
2

^2_e @ ñ V4• Õs

vÜz4mcs[rQ%6L(G) 64S0P8
82.0V02 *M09-gW } v

" È -


Age Group	Percentage
18-24	10%
25-34	20%
35-44	30%
45-54	25%
55-64	15%
65-74	10%
75-84	5%
85+	5%

EMI/EMS

SHENZHEN SOSEN ELECTRONICS CO., LTD.


SS-75VH-E

LED

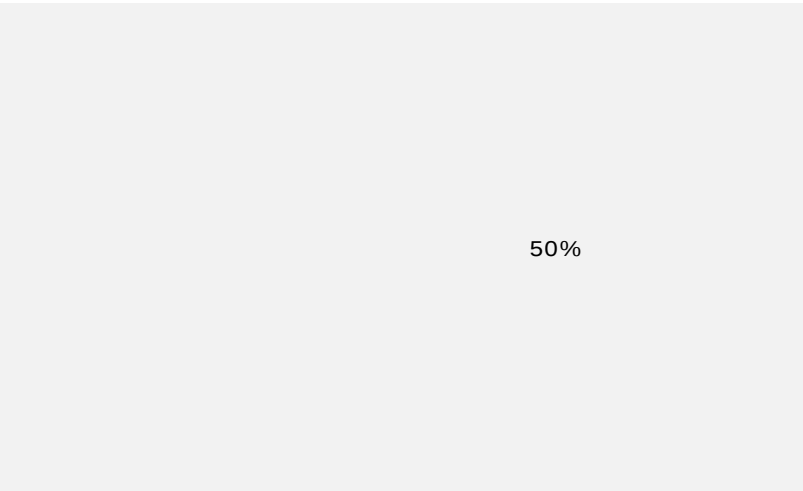


		T(@10%)	T(@50%)
120Vac	75A	210uS	
220Vac	140A		90uS
277Vac	205A	180uS	


Vs. (/AOC)




Vs. (Vin=120Vac)

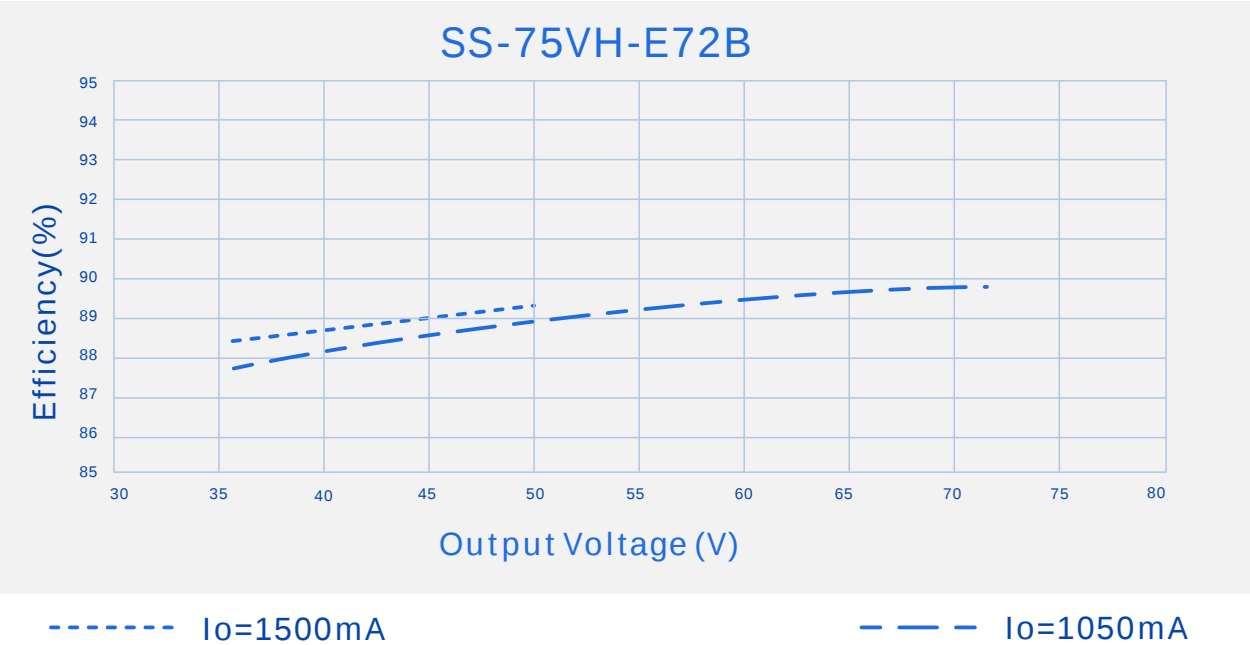

Vs. (Vin=220Vac)

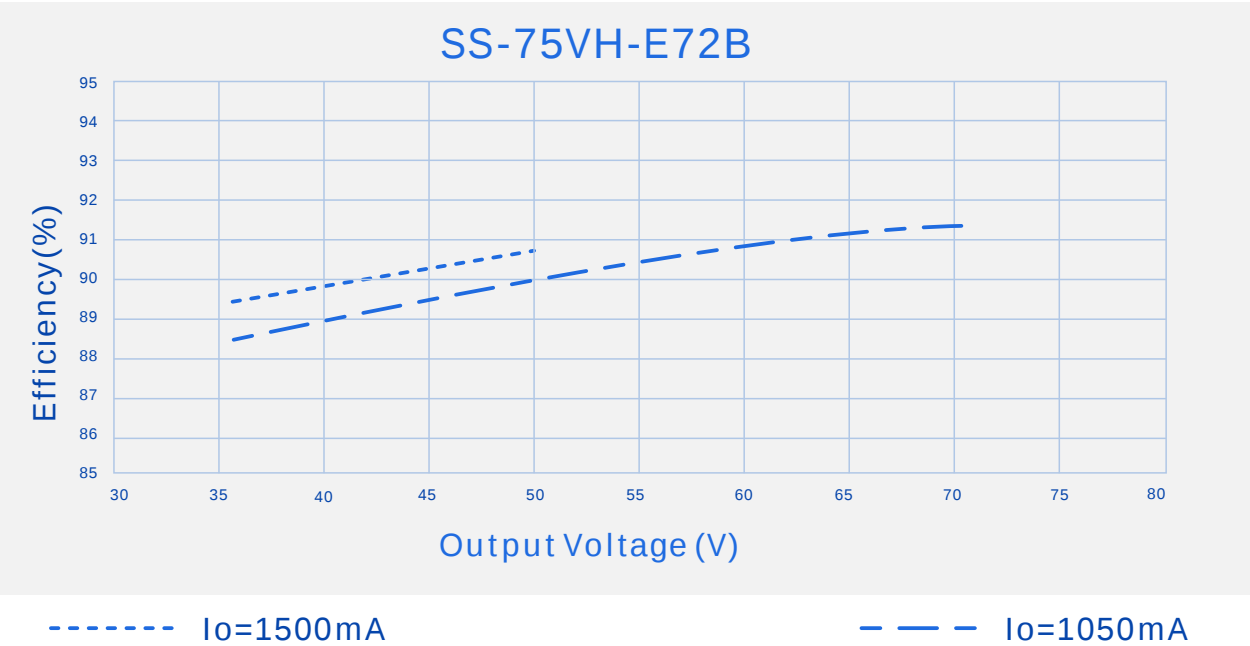


Vs. (Vin=120Vac)



----- Io=15

- - - -

Vs. (Vin=220Vac)




----- Io=1050mA

- - - Io=700mA

Vs. (Vin=277Vac)

(SS-75VH-E72B)



Vs.

'E

Φ

+

75VH-E

(SS-75VH-E)


Vs.



Vin=120Vac

Vin=277Vac

Vs.

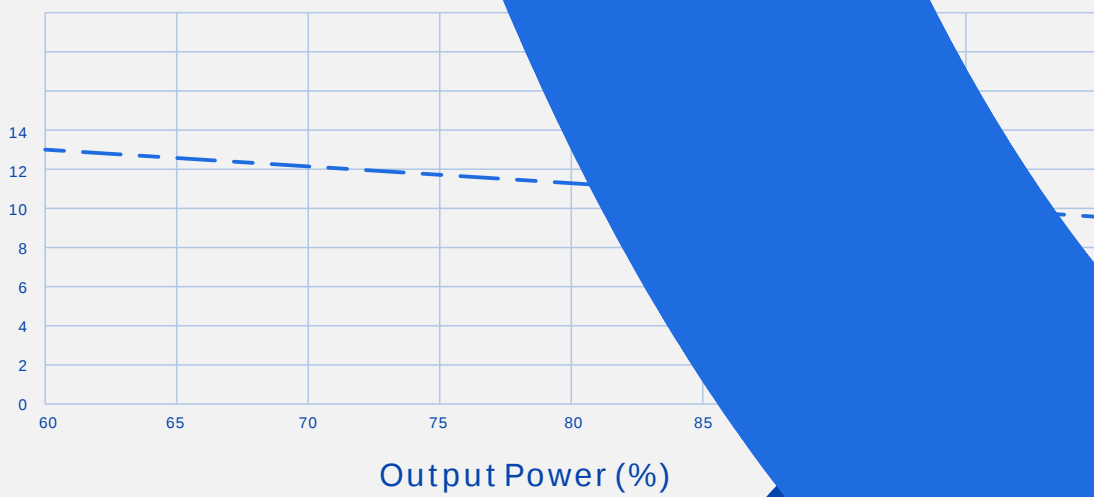


Vin=120Vac

Vin=220Vac

Vs.


Vs.



Vs.

Vs.


- 1
- 2
- 3
- PC

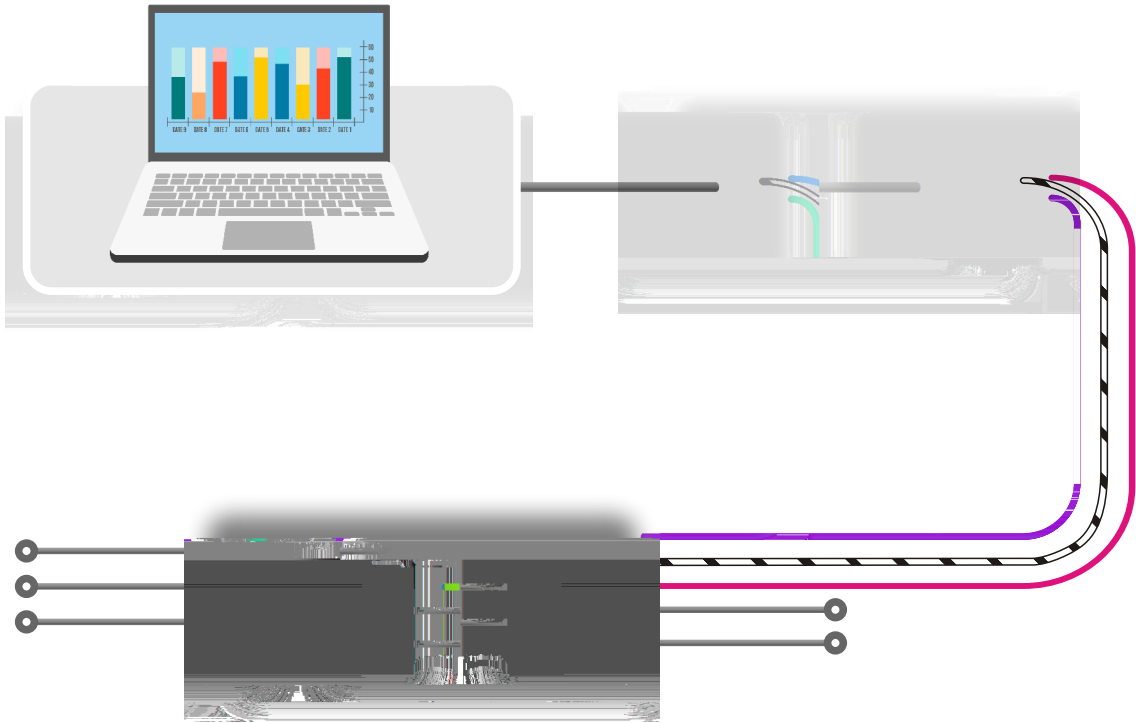

SS-PROG-LINK

SS-75VH-E

LED

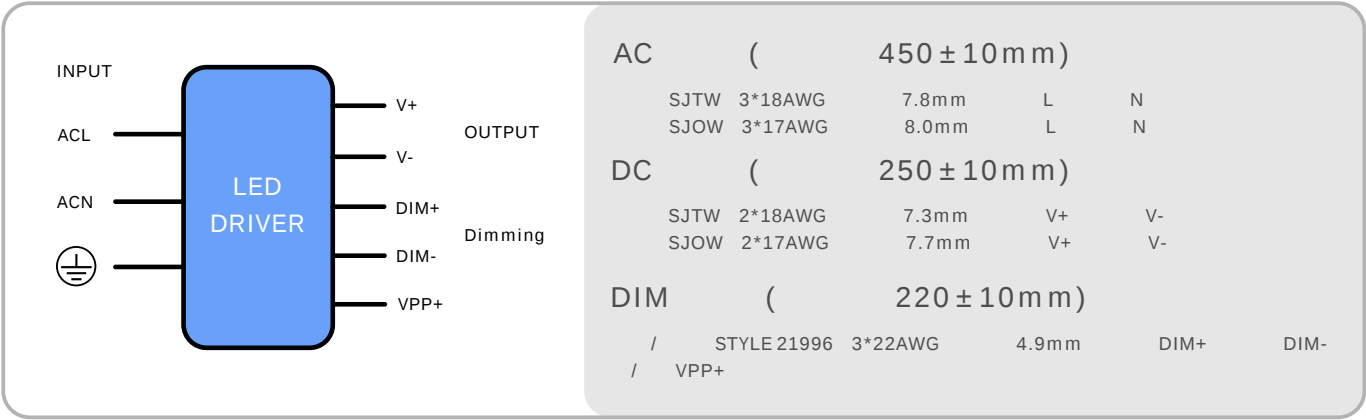

1

2

AC

DC

DIM

LED

/

7

;



1


- mm × × =495 × 385 × 162;
- 16
- 0.62kg 11.44kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU



V00		2022/12/12	
V01	SS-75VH-E72B	2023/08/07	
V02		2025/09/15	
V03		2026/01/07	