


: SS-50VP-XX

: 50W LED

: V08

: 2026-01-08



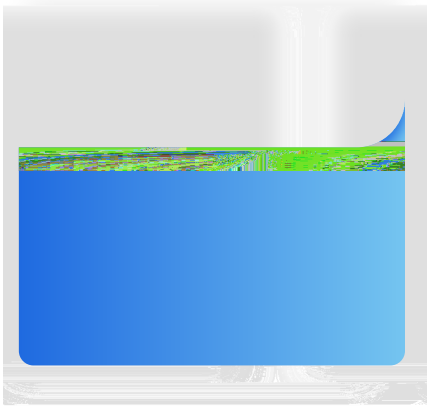

型号						
----	--	--	--	--	--	--

--	--

SS-50VP

LED

“ * ”

* $\dot{W}$

Ø

Đ

*



--	--	--	--	--

	100Vac		277Vac	
	90 Vac		305Vac	
	47Hz		63Hz	
			0.7A	100Vac
			70W	100Vac
(120Vac)			60A	
(220Vac)			140A	
(277Vac)			180A	
			0.5W	220Vac/50Hz,
	0.95	0.97		220Vac/50Hz
	0.90			277Vac/50Hz 70%
		8%	10%	220Vac/50Hz
			20%	277Vac/50Hz 70%

đ

.

Ē

Ø

Đ

--	--	--

--

(SS-50VP-72*)

	28V		72V	28-36V
	36V		72V	Po=Vo*Io=50W
	0.7A		1.4A	1.4A 36V,0.7A 72V
AOC	0.35A		1.4A	
		85.5%		72V/0.7A
		87.0%		
		87.5%		
PK-AV				
M				





	560g	
	138mm*66mm*35.5mm	x x

SS-50VP


LED

--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

SS-50VP

LED

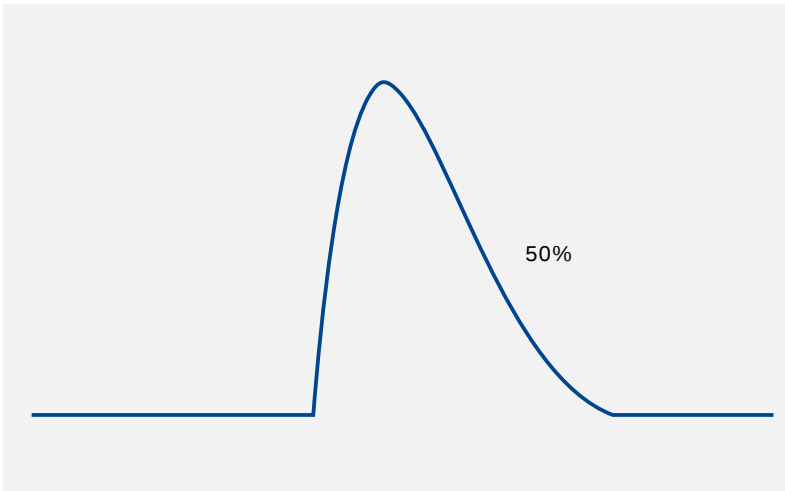

Vin		(@10%)	(@50%)
120Vac	60A	210uS	
220Vac	140A		80uS
277Vac	180A		

Vs.


/AOC

SS-50VP-56*


Vs.

/AOC

Vs. (Vin=120Vac)

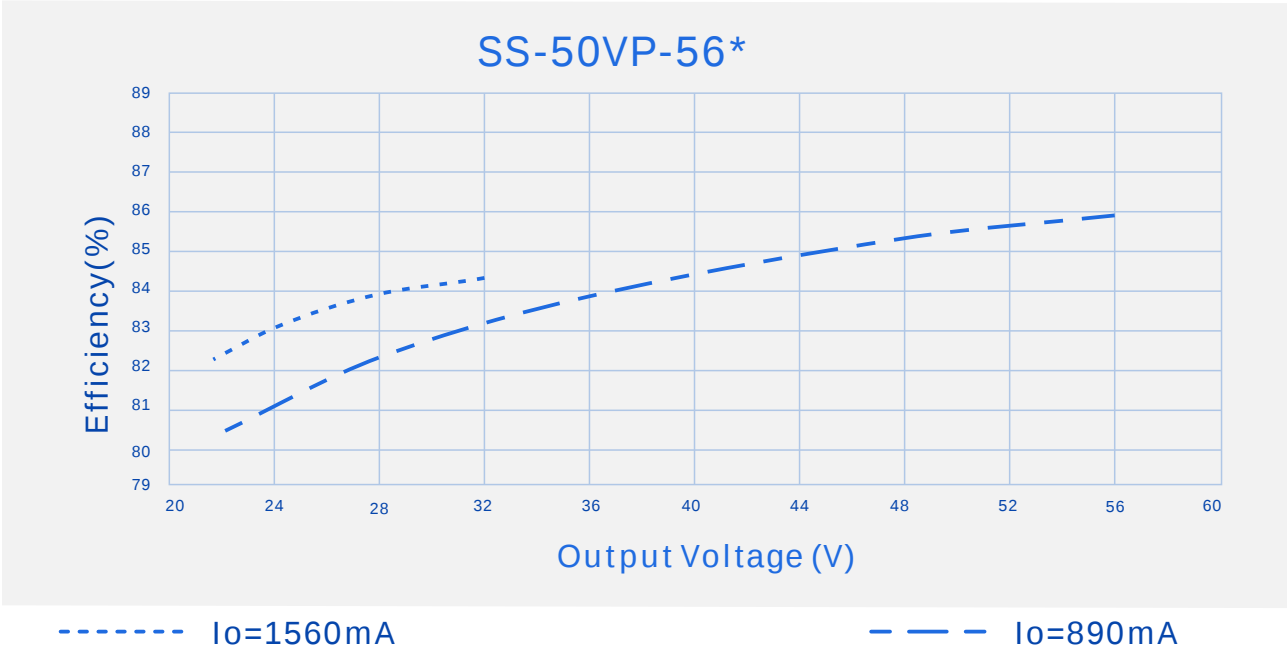


Vs. (Vin=220Vac)

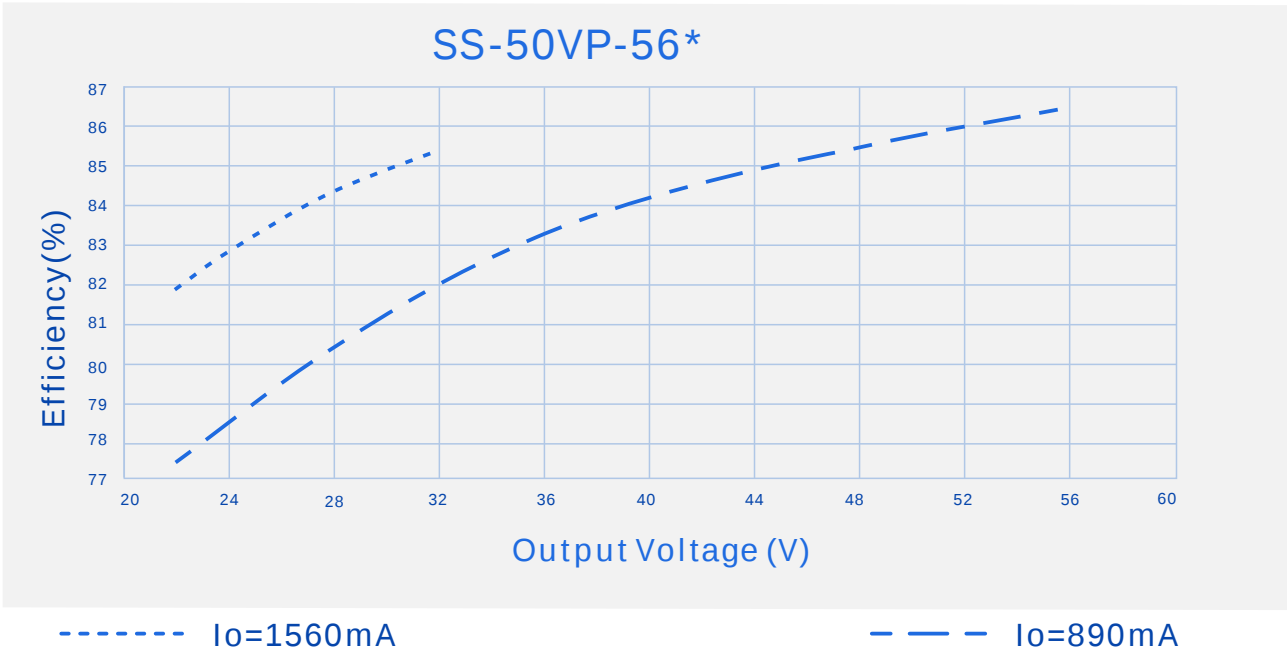


SS-50VP


Vs. (Vin=

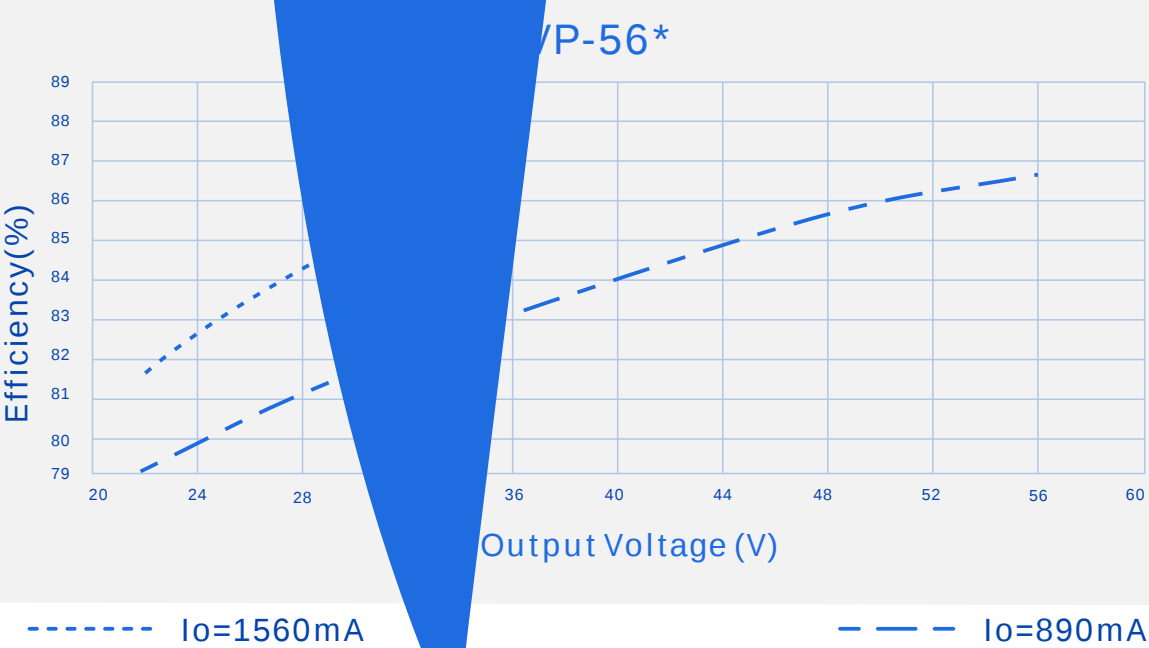

Vs. (Vin=120Vac)

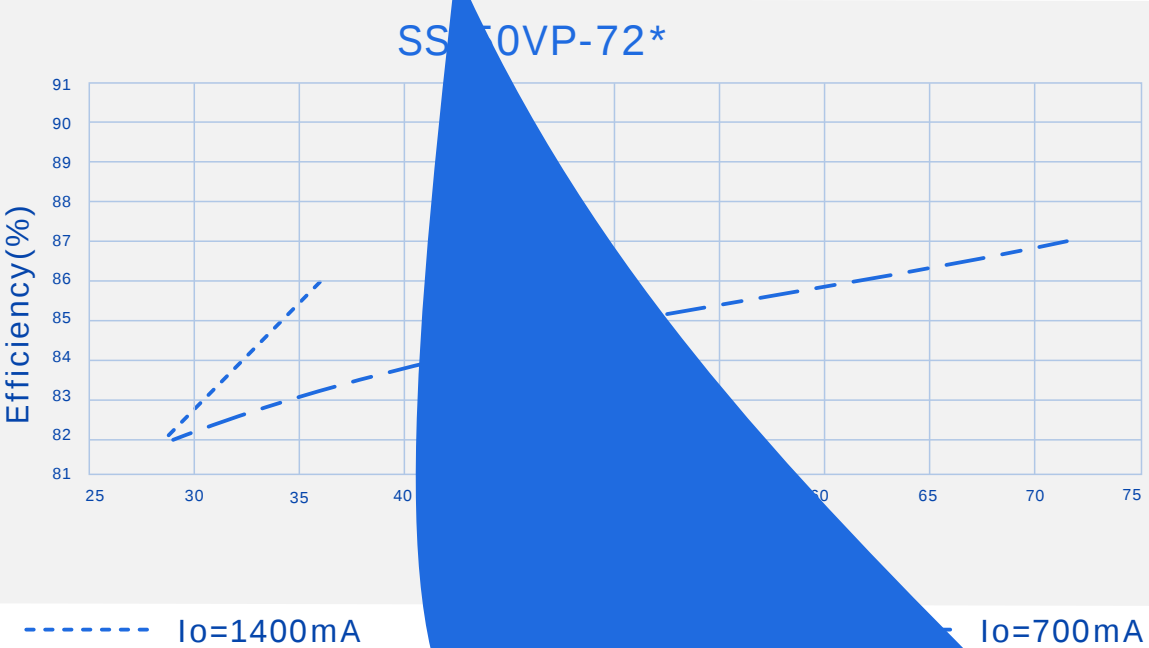

Vs. (Vin=220Vac)

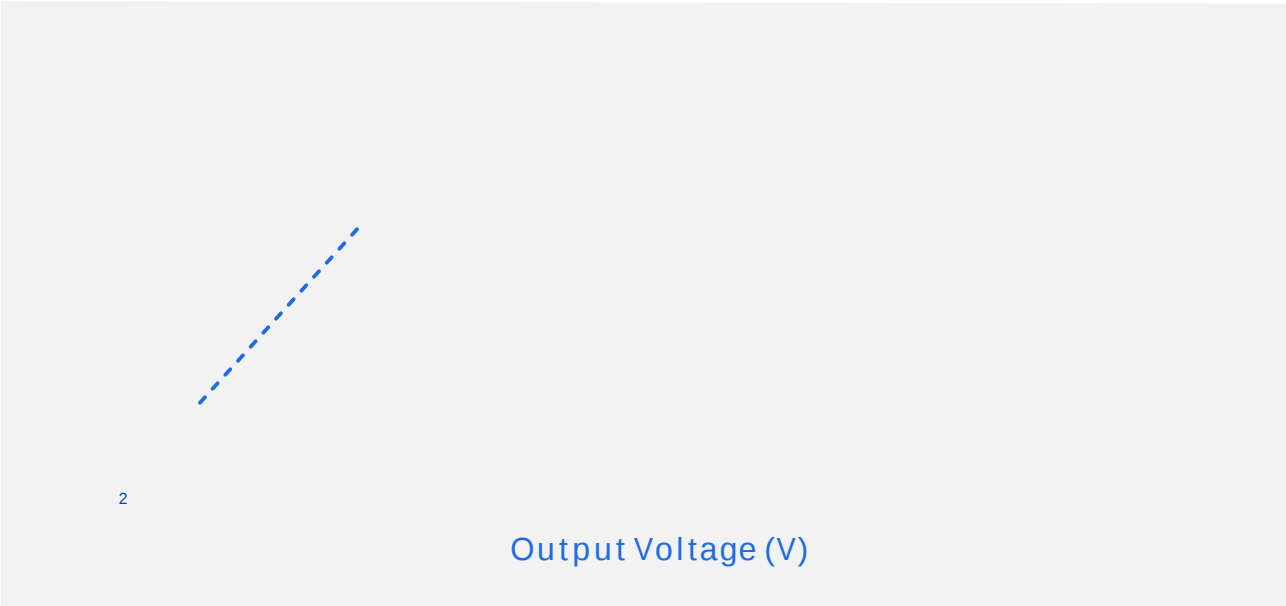

Vs. (Vin=277Vac)




Vs

Vs.

- 1
- 2
- 3
- PC






	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	(,
			(

“ 10V() ” / “ 0V () ”

RRR PS7 5 7 2



SS-50VP

LED



				mm(In.)	
				L3	121(4.76)
				W1	66(2.6)
				H	35.5(1.4)
				L1	138(5.43)
				L2	129(5.08)
				W2	32(1.26)
Tc				X	81(3.19)
Tc				Y	41(1.61)



1

-mm × × =495 × 385 × 162;

-16

-0.56kg10.22kg

-

GB 3873 83

1

RoHS

RoHS (2011/65/EU)





V00		2020/01/10	
V01		2020/04/25	
V02		2021/02/24	
V03		2021/07/02	
V04		2021/09/02	
V05	DALI-2	2022/01/18	
V06	TC	2023/02/01	
V07		2024/02/27	
V08		2026/01/08	